




DWS

Wall-Mounted Luminaires

Depending on the project's purpose, these can be used in a consecutive arrangement, at intervals, or individually. Its functional structure can provide downward or upward light, providing a perfect solution for corridors and passageways.

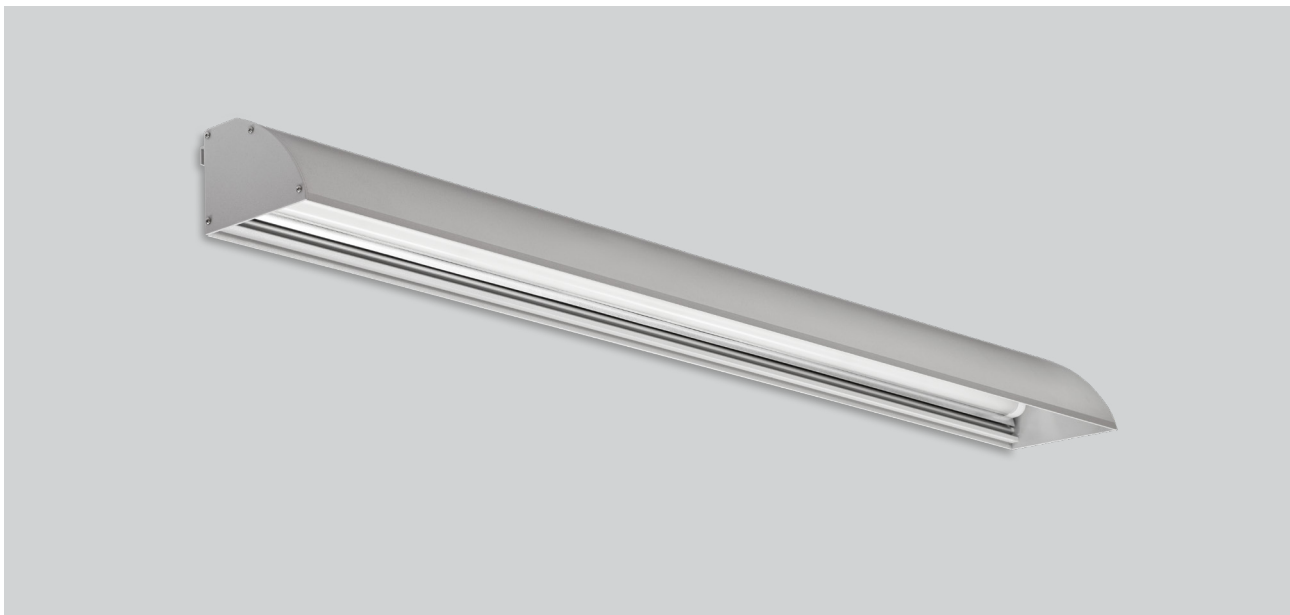

RAL COLORS

Std.

9006

Opt.

9005

9016

DWS

IP20  

Code	Beam Angle	Luminous Flux	System Power	Weight
DWS	Asymmetrical	3.315 lm	30 W	1.4 Kg

Body: Aluminum extrusion



Reflector: Aluminum

Color Temperature: 2700-3000-4000-5000-6500K

End Cap: Aluminum

Voltage: 220~240 VAC


Led: Mid Power

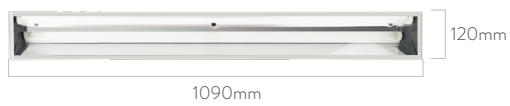

BOX DIMENSIONS
15x15x120 cm



BOX WEIGHT
1.8 kg



cd/klm
— C0 - C180 — C90 - C270