



# LGO

## Recessed Luminaires

This is a fixture model with a wide usage and application. The light coming from multiple LED sources in LGO fixtures passes through the opal diffuser and provides an extremely soft and homogeneous distribution to the environment. Production for all types of suspended ceilings is possible.

Therefore, production is made according to the brand/model of the suspended ceiling to be used. This fixture, like all Litpa fixtures is highly efficient and economical.



RAL COLORS

Std.

9016

Opt.

9005

9006

**LGO60**




Code	Luminous Flux	System Power	Voltage Range	Weight
LGO60-60/20	2.100 lm	20 W	220~240 VAC	4.5 Kg
LGO60-60/30	3.300 lm	30 W	220~240 VAC	4.5 Kg
LGO60-60/35	4.000 lm	35 W	220~240 VAC	4.5 Kg
LGO60-60/40	4.350 lm	40 W	220~240 VAC	4.5 Kg
LGO60-60/45	4.600 lm	45 W	220~240 VAC	4.5 Kg



**Body:** DKP sheet metal  
**Diffuser:** Opal  
**Driver:** Included

**Beam Angle:** 115°  
**Led:** Mid Power


**Color Temperature:** 2700-3000-4000-5000-6500K  
 TunableWhite

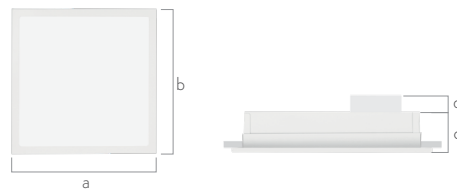

	Code	a	b	c	d	Cut-Out
GYPSUM	LGO60-60	595 mm	595 mm	60 mm	30 mm	580x580 mm
GYPSUM	LGO60-120	595 mm	1195 mm	60 mm	30 mm	580x1180 mm
CLIP-IN	LGO60-60	599 mm	599 mm	60 mm	30 mm	-
CLIP-IN	LGO60-120	599 mm	1199 mm	60 mm	30 mm	-
MODULAR	LGO60-60	595 mm	595 mm	60 mm	30 mm	-
MODULAR	LGO60-120	95 mm	1195 mm	60 mm	30 mm	-

  
**BOX DIMENSIONS**  
 65x64x14 cm

  
**BOX WEIGHT**  
 5 kg



cd/klm  
 — C0 - C180 — C90 - C270



**LGO30**


Code	Luminous Flux	System Power	Voltage Range	Weight
LGO30-30/18	1.950lm	18 W	220~240 VAC	1.4Kg
LGO30-60/18	1.950lm	18 W	220~240 VAC	2.5 Kg
LGO30-120/27	2.900lm	27 W	220~240 VAC	4.5 Kg
LGO30-120/35	3.900lm	35 W	220~240 VAC	4.5 Kg

**Body:** DKP sheet metal  
**Diffuser:** Opal

**Beam Angle:** 115°  
**Driver:** Included

**Color Temperature:** 2700-3000-4000-5000-6500K  
**Led:** Mid Power

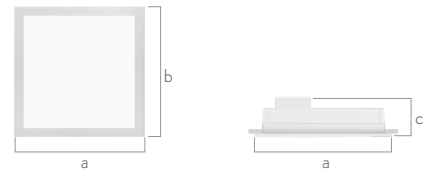


	Code	a	b	c	Cut-Out
<b>GYP SUM</b>	<b>LGO30-30</b>	295 mm	295 mm	90mm	280x280 mm
<b>GYP SUM</b>	<b>LGO30-60</b>	295 mm	595 mm	90mm	280x580 mm
<b>GYP SUM</b>	<b>LGO30-120</b>	295 mm	1195 mm	90mm	280x1180 mm
<b>CLIP-IN</b>	<b>LGO30-30</b>	299 mm	299 mm	90mm	-
<b>CLIP-IN</b>	<b>LGO30-60</b>	299 mm	599 mm	90mm	-
<b>CLIP-IN</b>	<b>LGO30-120</b>	299 mm	1199 mm	90mm	-
<b>MODULAR</b>	<b>LGO30-30</b>	295 mm	295 mm	90mm	-
<b>MODULAR</b>	<b>LGO30-60</b>	295 mm	595 mm	90mm	-
<b>MODULAR</b>	<b>LGO30-120</b>	295 mm	1195 mm	90mm	-


**BOX DIMENSIONS**

LGO30-30 35X35x14 cm  
LGO30-60 35X65x14 cm  
LGO30-120 35X125x14 cm


**BOX WEIGHT**

LGO30-30 2 Kg  
LGO30-60 3 Kg  
LGO30-120 5 Kg



cd/km  
— C0 - C180 — C90 - C270



RAL COLORS

Std.  
9016

Opt.  
9005  
9006



**LGO/P (Microprismatic)**




Code	Luminous Flux	System Power	Voltage Range	Weight
LGO/P60-60/20	1.700 lm	20 W	220~240 VAC	4.5 Kg
LGO/P60-60/30	2.550 lm	30 W	220~240 VAC	4.5 Kg
LGO/P60-60/35	2.975lm	35 W	220~240 VAC	4.5 Kg
LGO/P60-60/40	3.400 lm	40 W	220~240 VAC	4.5 Kg
LGO/P60-60/45	3.825 lm	45 W	220~240 VAC	4.5 Kg


**Body:** DKP sheet metal

**Diffuser:** Micro-prismatik+opal  
**Driver:** Included

**Color Temperature:** 2700-3000-4000-5000-6500K  
**Led:** Mid Power

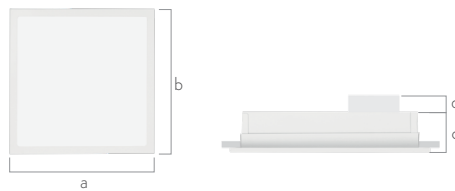

	Code	a	b	c	d	Cut-Out
GYPSUM	LGO60-60	595 mm	595 mm	60 mm	30 mm	580x580 mm
GYPSUM	LGO60-120	595 mm	1195 mm	60 mm	30 mm	580x1180 mm
CLIP-IN	LGO60-60	599 mm	599 mm	60 mm	30 mm	-
CLIP-IN	LGO60-120	599 mm	1199 mm	60 mm	30 mm	-
MODULAR	LGO60-60	595 mm	595 mm	60 mm	30 mm	-
MODULAR	LGO60-120	95 mm	1195 mm	60 mm	30 mm	-



cd/klm  
— C0 - C180 — C90 - C270

RAL COLORS

Std.

9016

Opt.

9005

9006



**LGO-WP**




Code	Luminous Flux	System Power	Voltage Range	Weight
LGO/WP 60/20	2.100 lm	20 W	220~240 VAC	4.5 Kg
LGO/WP 60/30	3.300 lm	30 W	220~240 VAC	4.5 Kg
LGO/WP 60/35	4.000 lm	35 W	220~240 VAC	4.5 Kg
LGO/WP 60/40	4.350 lm	40 W	220~240 VAC	4.5 Kg
LGO/WP 60/45	4.600 lm	45 W	220~240 VAC	4.5 Kg



**Body:** DKP sheet metal  
**Diffuser:** Opal

**Beam Angle:** 115°  
**Driver:** Included

**Color Temperature:** 2700-3000-4000-5000-6500K, TW  
**Led:** Mid Power

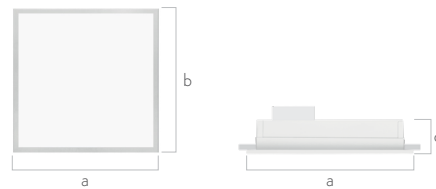


	Code	a	b	c	d	Cut-Out
GYPSUM	LGO/WP 60-60	595 mm	595 mm	60mm	30mm	580x580 mm
GYPSUM	LGO/WP 30-30	295 mm	295 mm	60mm	30mm	280x280 mm
CLIP-IN	LGO/WP 60-60	599 mm	599 mm	60mm	30mm	-
CLIP-IN	LGO/WP 30-30	299 mm	299 mm	60mm	30mm	-
MODULAR	LGO/WP 60-60	595 mm	595 mm	60mm	30mm	-
MODULAR	LGO/WP 30-30	295 mm	295 mm	60mm	30mm	-




**BOX DIMENSIONS**  
65x64x14 cm



**BOX WEIGHT**  
7 kg



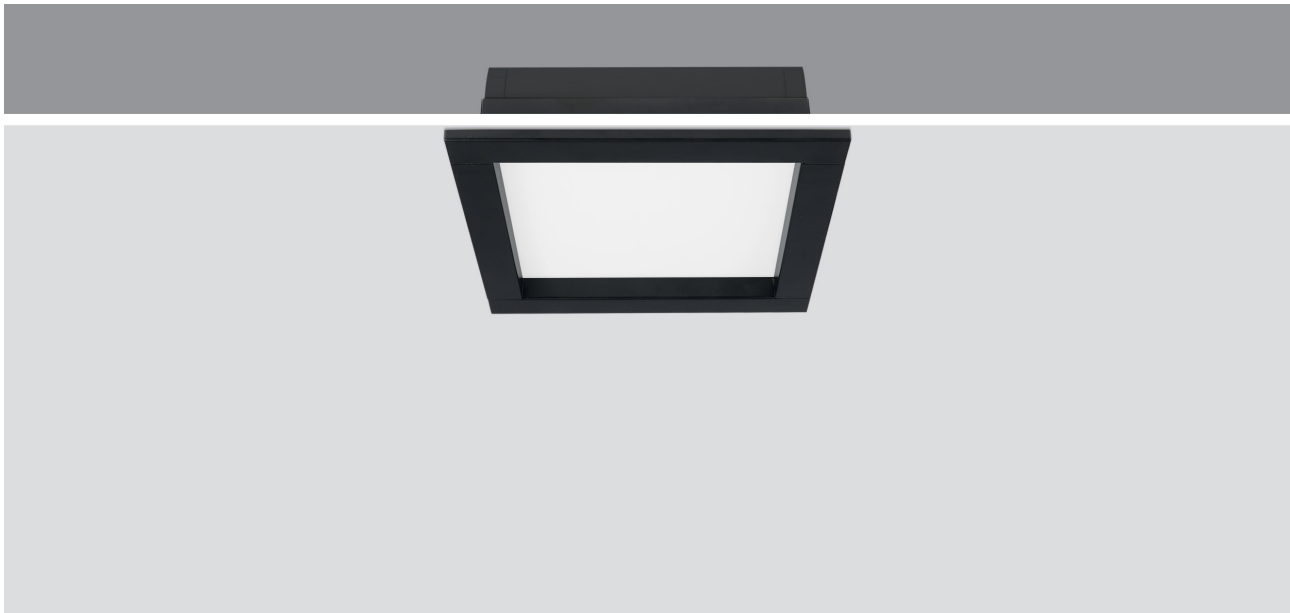

RAL COLORS

Std.

9016

Opt.

9005

9006

**LGO MINI**




Code	Luminous Flux	System Power	Voltage Range	Weight
LGO 15	1.600 lm	15 W	220~240 VAC	0.4 Kg
LGO 20	1.950 lm	20 W	220~240 VAC	0.5 Kg

**Body:** DKP sheet metal  
**Diffuser:** Opal


**Beam Angle:** 105°  
**Driver:** Included

**Color Temperature:** 2700-3000-4000-5000-6500K  
**Led:** Mid Power

LGO 20

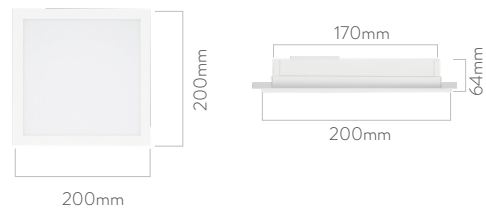


LGO 15

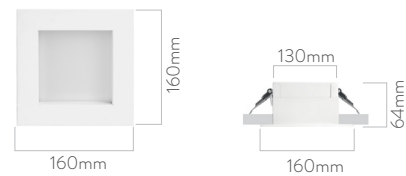

**BOX DIMENSIONS**  
25x25x7 cm



**BOX WEIGHT**  
1 kg



cd/klm  
— C0 - C180 — C90 - C270