



Litpa

INDEX

Decorative System and Luminaires 13


DARK SYSTEM 14


THIN-LINE 36


LUMIFLEX 40


ORION 72


DOP 76


ODO 78



SLO 80


DSO 82

Downlights 85


DOT 86


DL 45 98


GALAXYLED 100



MSG 104


PUNTO 112


SSD 116


LUCIFER 120


SFR 124


DNT 126


AGS 130


PULSAR 134


MSG/N 136


DYG 138


DML MAXI 140


DML MINI 144


LKG 148


PGH 150


RLM/D 154


RLM/DK 156

Surface Mounted Downlights 159


RLP-C 160


PNS 162


RLP/S 164


RLP/RY 166


RLM/RY 168

Track Spotlights 171


TRACKS 172


SAKURA 174


FASHIONLED 180


RLM/T 184

Linear Lighting 187


EOSLED 188

INDEX

Recessed Luminaires 199


OFISLED
200


LEG
202


LGO
206


MOON
212


FNSB
214

Surface Mounted Luminaires 219



LSS
220


LSO
222


FNSS/Y
224


SCP
226

Wall Luminaires 229


WLS
230


LML
232


DAP
234


DL-80
238


WLC
240


WCN
242


DWS
244

Clean Room Luminaires 247


HFC/AL
249


HFC/ST
250


HFC/SR
252

Basic and Trunk 255


TEKNOLINE
256


TRK-TRS
260

Waterproof 265


ELP
266


ESW
272

Industrial Luminaires 275


ENDILED
276


APOLLO
280


PLN
284


FHL
288


TEKNOMAX
290

Exit and Emergency 293


LXT
294



Light is the soul of life and spaces. With this unwavering belief at our core, we are a company dedicated to designing and manufacturing modern, high-quality luminaires while delivering innovative and sustainable lighting solutions. Backed by our advanced in-house production capabilities, we proudly bring exceptional lighting to both local and international projects. Every stage of our meticulous work—from initial concept design to precision manufacturing, application, and final inspection—is carried out with the utmost care, ensuring a perfect balance of aesthetics, functionality, and cutting-edge technology. With a customer-centric mindset and a pioneering, forward-thinking spirit, we remain fully committed to illuminating the world and sharing the transformative power of light.


33 Years Of Experience

Proper lighting is essential for creating livable, functional, and inspiring spaces. Since 1992, LİTPA has been dedicated to delivering the right lighting solutions through innovation, engineering, and design. Our lighting systems for architectural projects are developed to enhance human well-being while offering aesthetic, state-of-the-art, and comfortable environments. At LİTPA, we believe that every well-designed project leads to the next—this is our driving motto. We combine advanced fixtures, engineering expertise, and creative design to achieve excellence in every project. "Good enough" is never enough for us; we strive to do better, always. Whether it's an intimate interior space or a large-scale outdoor project, we maintain the same level of commitment to service and solution excellence. Our R&D-driven manufacturing facility is constantly evolving to produce innovative, high-quality products that reflect our passion for cutting-edge design and technology. Our Lighting Project team, composed of industry experts, is dedicated to creating impactful lighting designs that stand out. At LİTPA, we believe true progress comes from a service philosophy focused on customer satisfaction, providing the right solution at the right time with uncompromising quality. This approach has made LİTPA one of the fastest-growing lighting companies, building a solid track record of success in both domestic and international markets. We continue to expand through strategic partnerships and investments across the EU, CIS, and Middle East. With a network of professional dealers, LİTPA proudly serves numerous cities across Turkey, offering advanced technology, ethical business practices, and intelligent lighting solutions. We are pleased to share this catalogue with project developers, architects, and industry professionals seeking excellence in lighting.


Production



Our journey in manufacturing began 33 years ago with the production of suspended ceiling fixtures and canopy luminaires. Today, we have expanded our capabilities to offer a wide range of high-quality lighting solutions designed to meet the evolving needs and expectations of our clients.

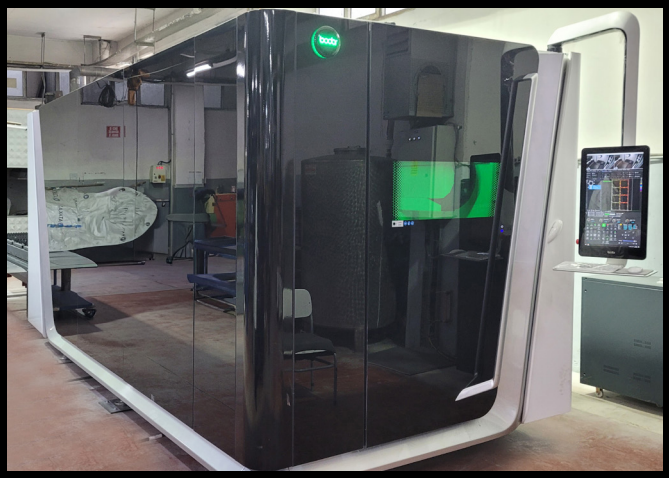

The laser machine used in sheet metal cutting ensures fast production and enables manufacturing with zero error.

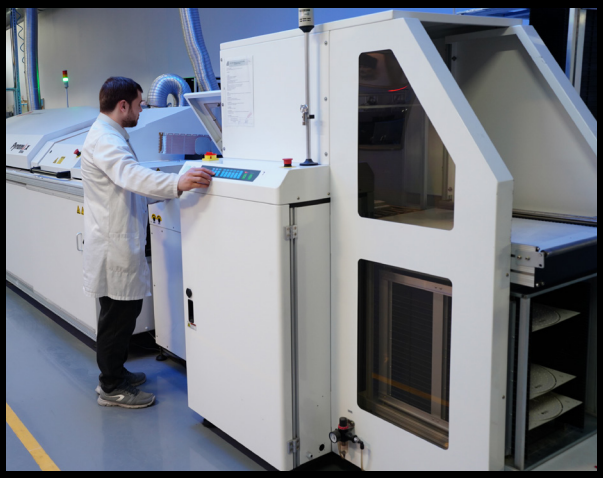

The state-of-the-art PCB assembly machine we use for our lighting products places LEDs with micron precision.





Our company uses specialty chemicals which do not harm human health or the environment during the surface cleaning process prior to painting.

Quality

Our Quality Concept


At LİTPA Lighting, we are committed to delivering products and services that meet international standards and exceed customer expectations. We firmly believe that customer satisfaction is a core principle, and we align all our operations with this philosophy.

Our company operates in accordance with the TSE-ISO-EN 9001:2015 Quality Management System, and we have fostered a culture of quality awareness across all levels of our organization. To ensure defect-free products, we implement rigorous quality control processes at every stage of production—from the inspection of raw materials and procurement to the final checks on packaged products ready for shipment. As part of our ongoing commitment to quality, all our products undergo regular testing in our in-house laboratories, which are equipped and maintained in accordance with international standards. Our goal is not only to meet customer requirements but to achieve long-term satisfaction by continuously improving our systems and processes.

In addition to our quality management practices, LİTPA holds the following certifications:

- TSE TS ISO 45001:2018 – Occupational Health and Safety Management System
- TS EN ISO 14001:2015 – Environmental Management System








Our Quality Policy


- To become a trusted and recognized brand in the lighting sector, leading in quality and customer satisfaction while maintaining competitive pricing.
- To continually improve our Quality Management System through employee training and active participation at all levels.
- To enhance input quality through effective collaboration with suppliers.
- To prevent defects, eliminate waste, and increase productivity across all processes.
- To comply with legal regulations and maintain environmental responsibility in all aspects of our operations.

Applications



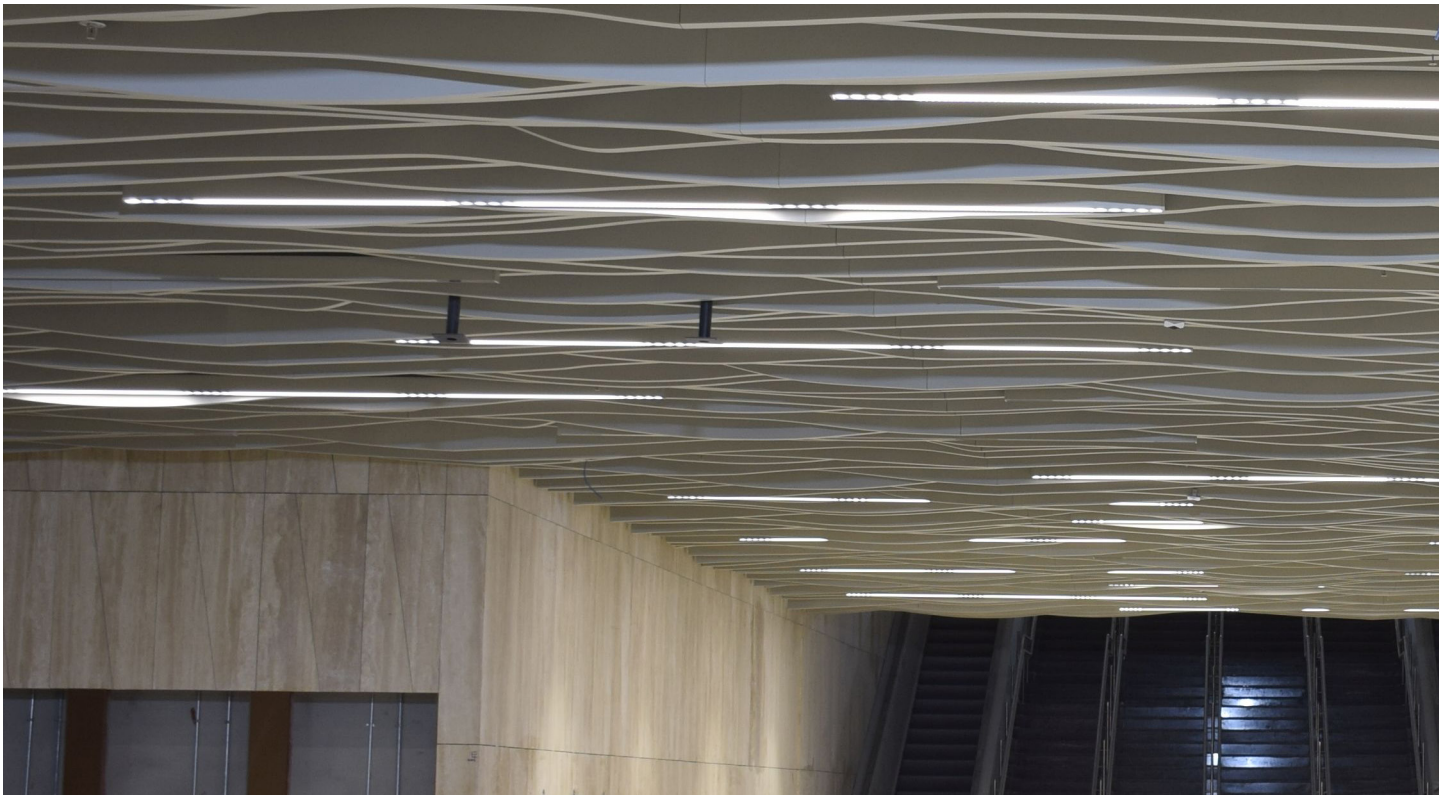


gelir bi mutluluk :)

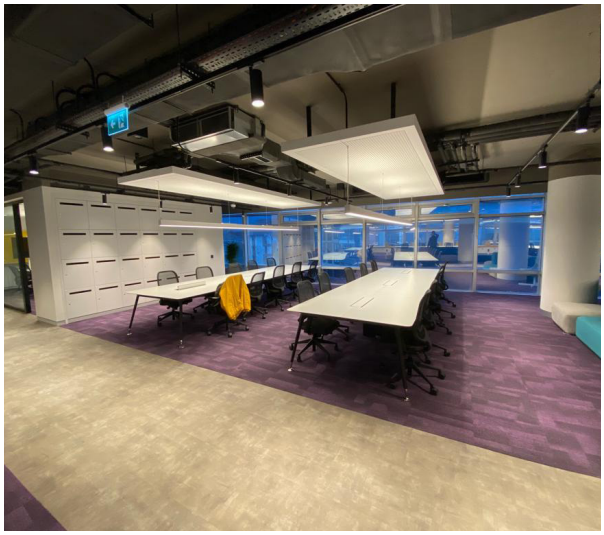





Applications










YHT


GLUTENSİZ ÜRÜNLER

Decorative System and Luminaires

DARK-LINE
DARK-INN
DARK-ZONE
THIN-LINE
LUMIFLEX
ORION
DOP
ODO
SLO
DSO




DARK-LINE
Decorative Systems


Black and white reflectors are highly effective optical elements for controlled environments where light control is essential, minimizing unwanted reflections. They are particularly well-suited for offices, laboratories, and similar settings, offering an optimal lighting solution.

A key consideration is the ability to customize luminaires to meet ideal conditions while ensuring they complement the decor harmoniously. Darkline luminaires excel in such scenarios, providing both functionality and aesthetic appeal.

INDEX

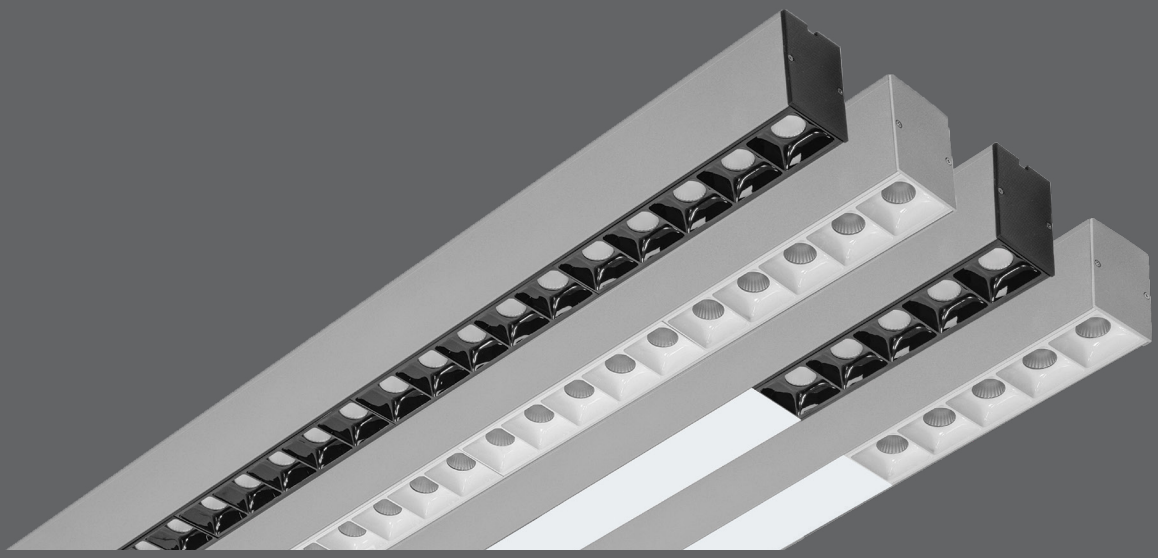

Darkline luminaires can incorporate multiple optical solutions to address different lighting requirements. Both black and white reflectors can be combined with opal diffusers for enhanced functionality.

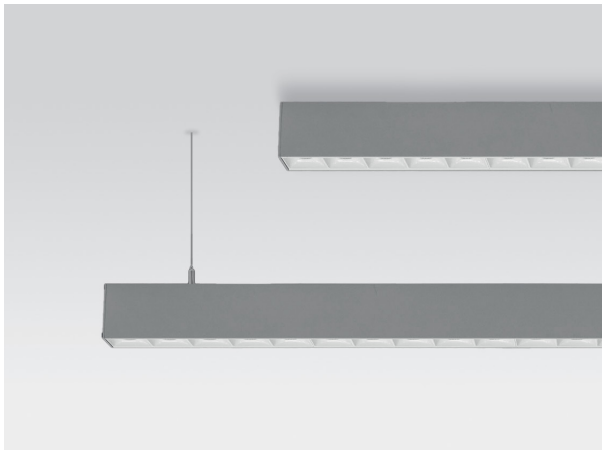

Darkline luminaires offer maximum versatility with both surface-mounted and pendant installation options. Their adaptable design allows seamless integration into diverse spaces and decorative needs.




Darkline offers white, black, and gray color options, providing design versatility that complements modern spaces with style and flexibility.



Combining sleek aesthetics with functionality, this series stands out in modern lighting solutions, while its practical installation advantage makes it a preferred choice.

INDEX

RAL COLORS
Std.
9006
Opt.
9005
9016

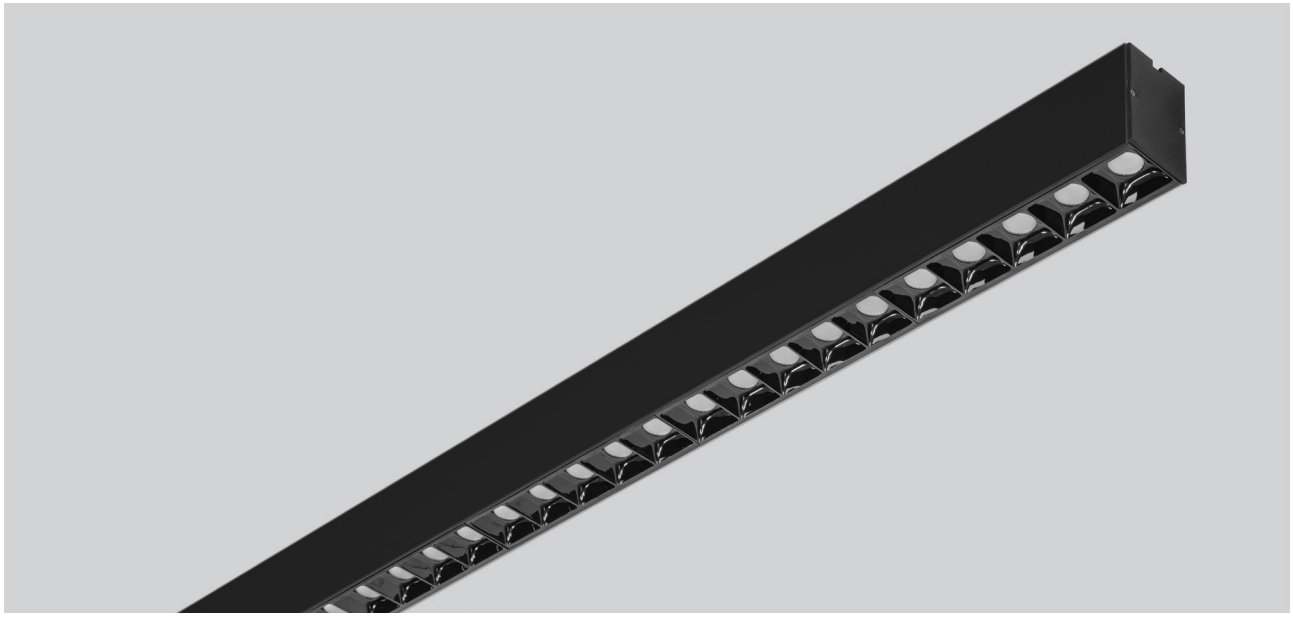

DLD/BLACK

IP20 | RoHS COMPLIANT | CE

Code	Light Direction	Beam Angle	Luminous Flux	System Power	Weight
DLD/BBBBB	Direct	45°	6.300 lm	55 W	3.6 Kg
DLE/BBBBB	Direct-Indirect	45° - 110°	6.700 lm	65 W	3.3 Kg


HCL

Body: Aluminum extrusion
Reflector: PC
Lens: PMMA

Driver: Included
Voltage: 220~240VAC

Color Temperature: 2700-3000-4000-5000-6500K, TW
Led: Mid Power Led




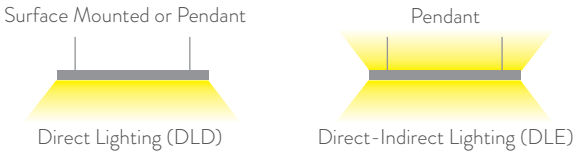


BOX DIMENSIONS
122x8x14cm


BOX WEIGHT
4 kg

DLD/BBBBB



DLE/BBBBB



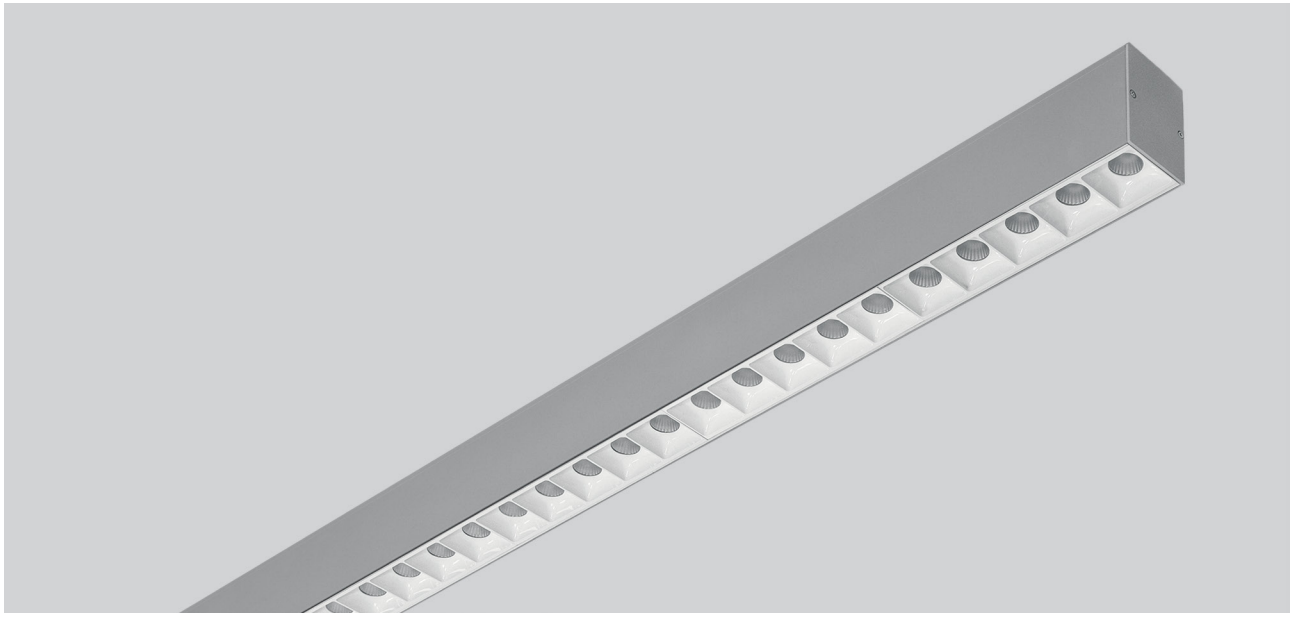

RAL COLORS

Std.
9006

Opt.
9005
9016

DLD/WHITE

IP20 | RoHS COMPLIANT | CE


Code	Light Direction	Beam Angle	Luminous Flux	System Power	Weight
DLD/WWWWW	Direct	45°	6.300 lm	55 W	3.6 Kg
DLE/WWWWW	Direct-Indirect	45° - 110°	6.700 lm	65 W	3.3 Kg

HCL

Body: Aluminum extrusion
Reflector: PC
Lens: PMMA

Driver: Included
Voltage: 220~240VAC


Color Temperature: 2700-3000-4000-5000-6500K, TW
Led: Mid Power Led

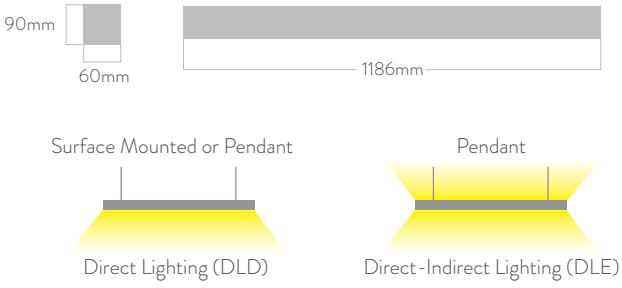


BOX DIMENSIONS
122x8x14cm

BOX WEIGHT
4 kg

DLD-WWWWW



DLE-WWWWW



RAL COLORS
Std.
9006
Opt.
9005
9016




DLD/OPAL

IP20 | RoHS COMPLIANT | CE

Code	Light Direction	Beam Angle	Luminous Flux	System Power	Weight
DLD/O	Direct	110°	3.900 lm	35 W	3.75 Kg
DLE/O	Direct-Indirect	110°	5.300 lm	50 W	3.5 Kg

Body: Aluminum extrusion
Diffuser: Opal
Driver: Included
Voltage: 220~240VAC
Color Temperature: 2700-3000-4000-5000-6500K
Led: Mid Power




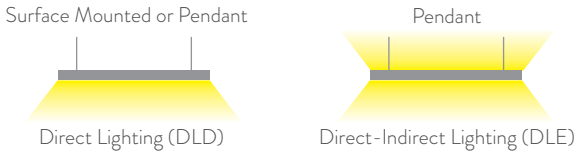


BOX DIMENSIONS
124x8x14cm


BOX WEIGHT
4 kg

DLD/O



DLE/O



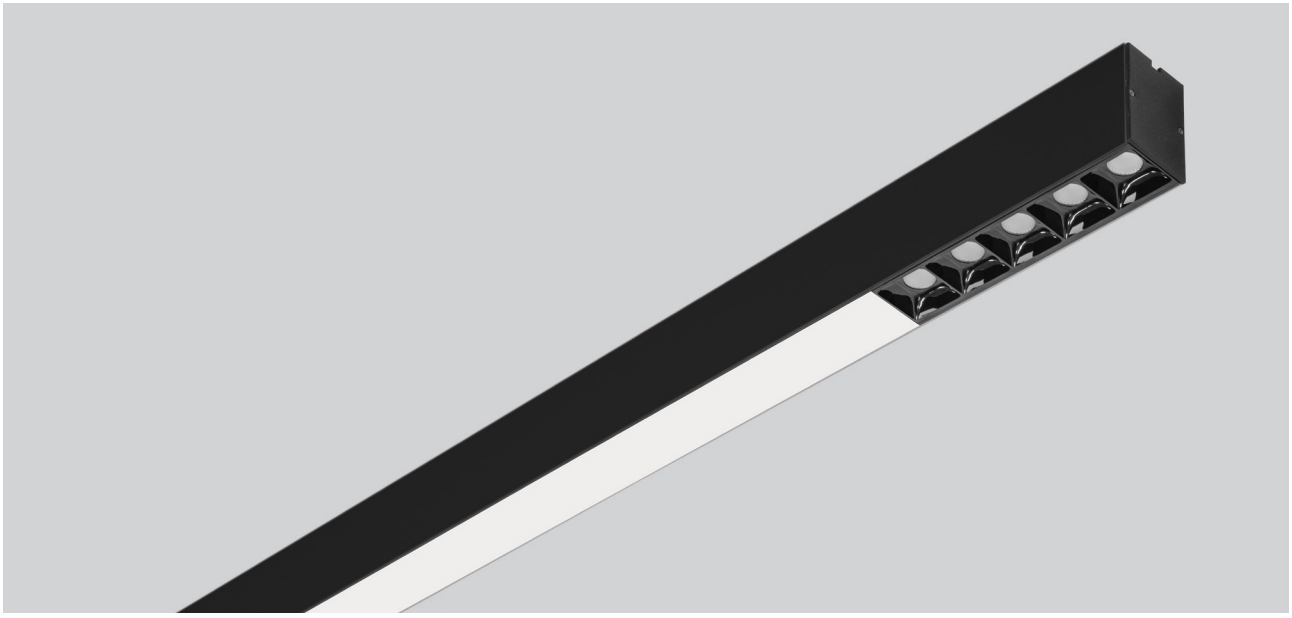

RAL COLORS

Std.
9006

Opt.
9005
9016

DLD/BOOOB


IP20 | RoHS COMPLIANT | CE


Code	Light Direction	Beam Angle	Luminous Flux	System Power	Weight
DLD/BOOOB	Direct	50°	5.200 lm	55 W	3.6 Kg
DLE/BOOOB	Direct-Indirect	50° - 110°	6.000 lm	65 W	3.3 Kg

Body: Aluminum extrusion
Diffuser: Opal
Reflector: PC


Driver: Included
Lens: PMMA
Voltage: 220~240VAC


Color Temperature: 2700-3000-4000-5000-6500K
Led: Mid Power













BOX DIMENSIONS
122x8x14cm

BOX WEIGHT
4 kg


DLD/BOOOB



DLE/BCCCB



RAL COLORS
Std.
9006
Opt.
9005
9016

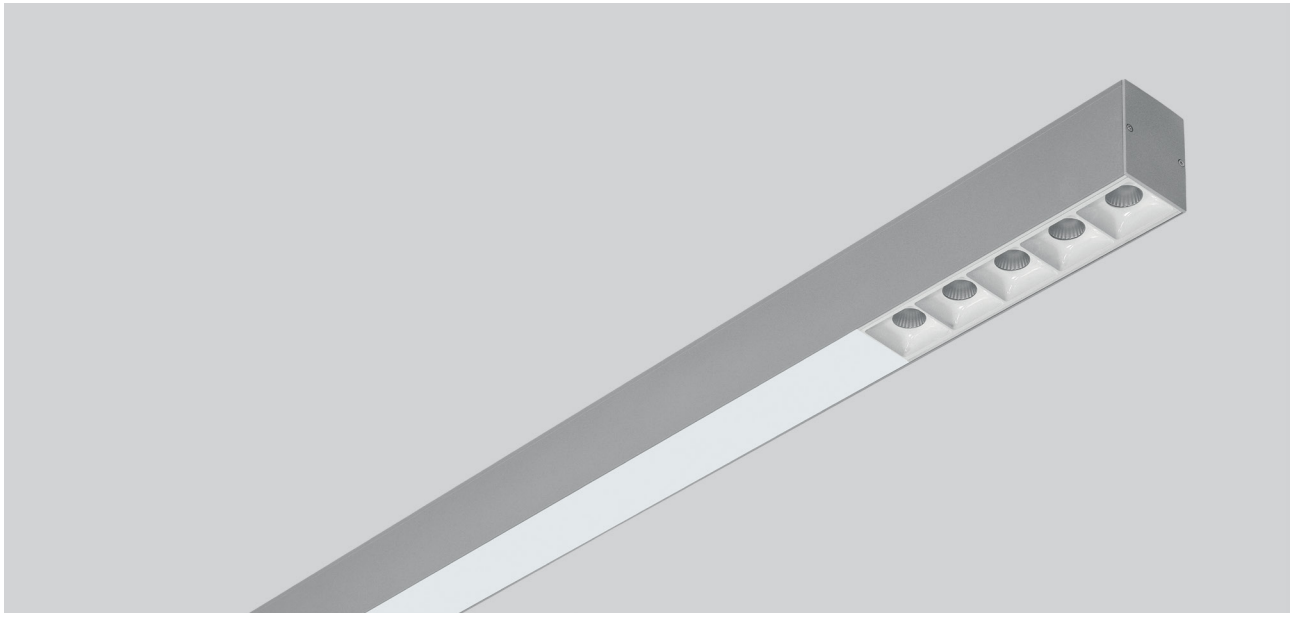



DLD/WOOOW

IP20 | RoHS COMPLIANT | CE


Code	Light Direction	Beam Angle	Luminous Flux	System Power	Weight
DLD/WOOOW	Direct	50°	5.200 lm	55 W	3.6 Kg
DLE/WOOOW	Direct-Indirect	50° - 110°	6.000 lm	65 W	3.3 Kg


Body: Aluminum Injection
Diffuser: Opal
Reflector: PC
Lens: PMMA
Driver: Included
Voltage: 220~240VAC
Color Temperature: 2700-3000-4000-5000-6500K
Led: Mid Power













BOX DIMENSIONS
122x8x14cm





BOX WEIGHT
4 kg

DLD-WOOOW



DLE/WCCCW



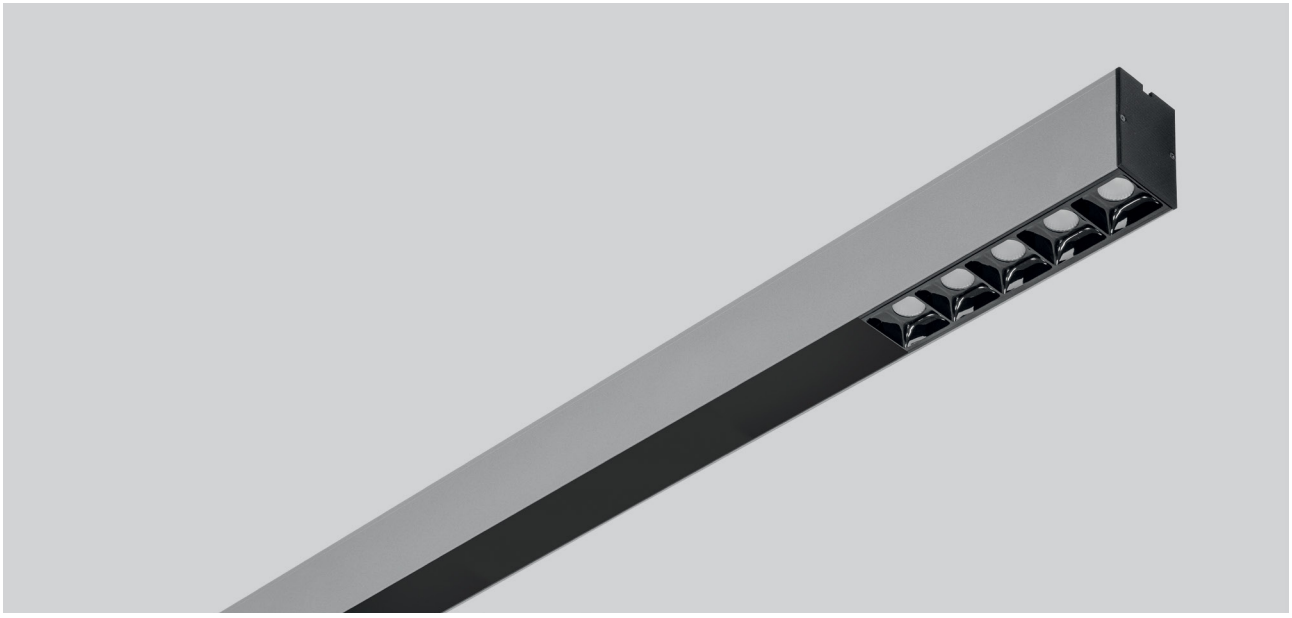

RAL COLORS

Std.
9006

Opt.
9005
9016

DLD/BCCCB


IP20 | RoHS COMPLIANT | CE


Code	Light Direction	Beam Angle	Luminous Flux	System Power	Weight
DLD/BCCCB	Direct	45°	2.900 lm	22 W	3.6 Kg
DLE/BCCCB	Direct-Indirect	45° - 110°	3.400 lm	32 W	3.3 Kg

Body: Aluminum extrusion
Reflector: PC
Lens: PMMA


Driver: Included
Voltage: 220~240VAC


Color Temperature: 2700-3000-4000-5000-6500K
Led: Mid Power













BOX DIMENSIONS
122x8x14cm

BOX WEIGHT
4 kg


DLD/BCCCB



DLE/BCCCB



RAL COLORS
Std.
9006
Opt.
9005
9016

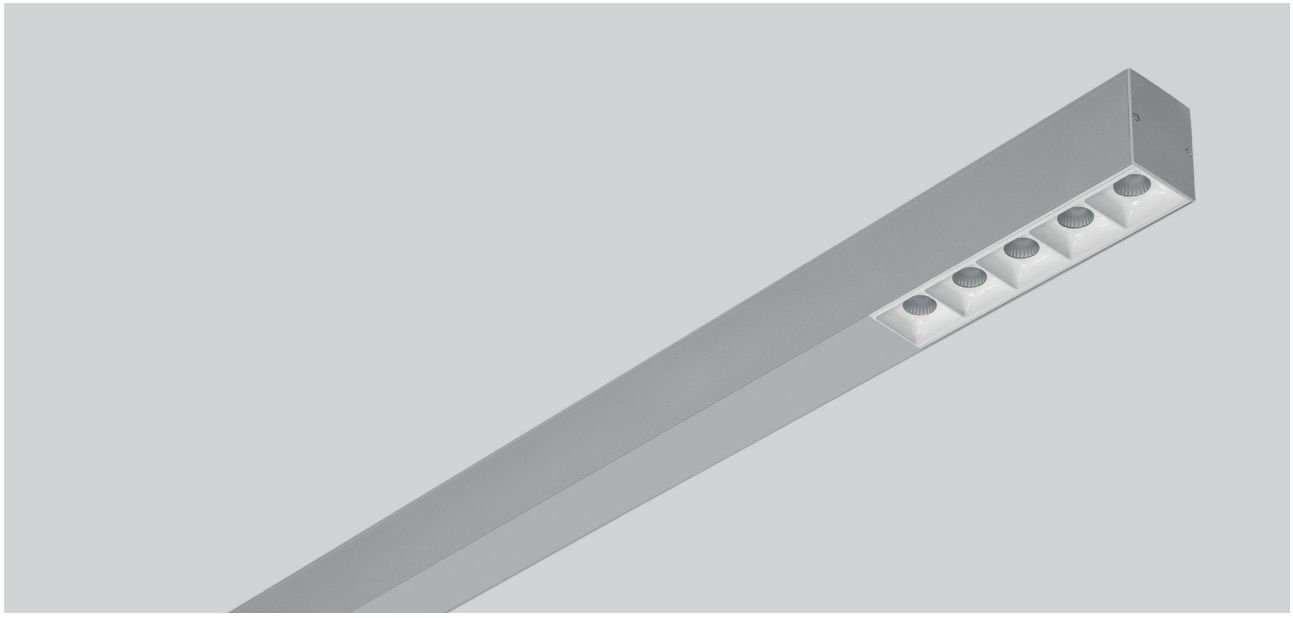

DLD/WCCCW


IP20 | RoHS COMPLIANT | CE


Code	Light Direction	Beam Angle	Luminous Flux	System Power	Weight
DLD/WCCCW	Direct	45°	2.900 lm	22 W	3.6 Kg
DLE/WCCCW	Direct-Indirect	45-110°	3.400 lm	32 W	3.3 Kg

Body: Aluminum extrusion
Reflector: PC
Lens: PMMA


Driver: Included
Voltage: 220~240VAC


Color Temperature: 2700-3000-4000-5000-6500K
Led: Mid Power













BOX DIMENSIONS
122x8x14cm

BOX WEIGHT
4 kg


DLD-WCCCW



DLE/WCCCW




ÇAKIR

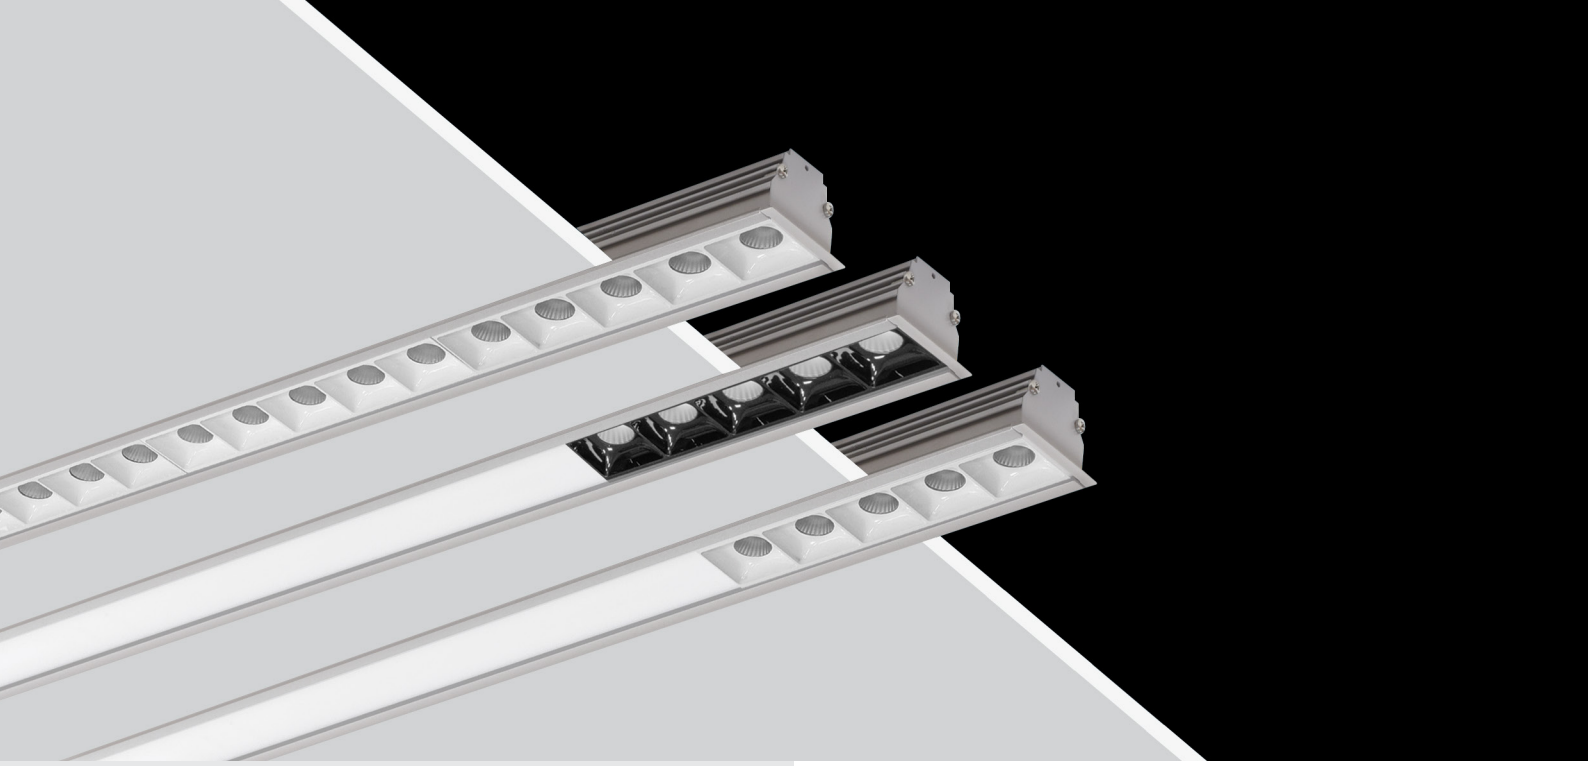


DARK-INN
Decorative Systems

DARK-INN luminaires meet the need for glare-free and optimal lighting in various applications with their customizable designs. Litpa's specially developed luminaires utilize Dark optics technology, ensuring high light control while maintaining luminaire efficiency.

The fixtures offer black or white Dark optics options, which can be combined with opal diffusers. This allows for reflection-free screen visibility in project-oriented spaces such as technical drawing, graphic design, and similar fields where precise light angles are critical.

The advanced optical structure minimizes unwanted glare and reflections, making DARK-INN an ideal solution for workspaces that demand both visual comfort and high performance.

INDEX

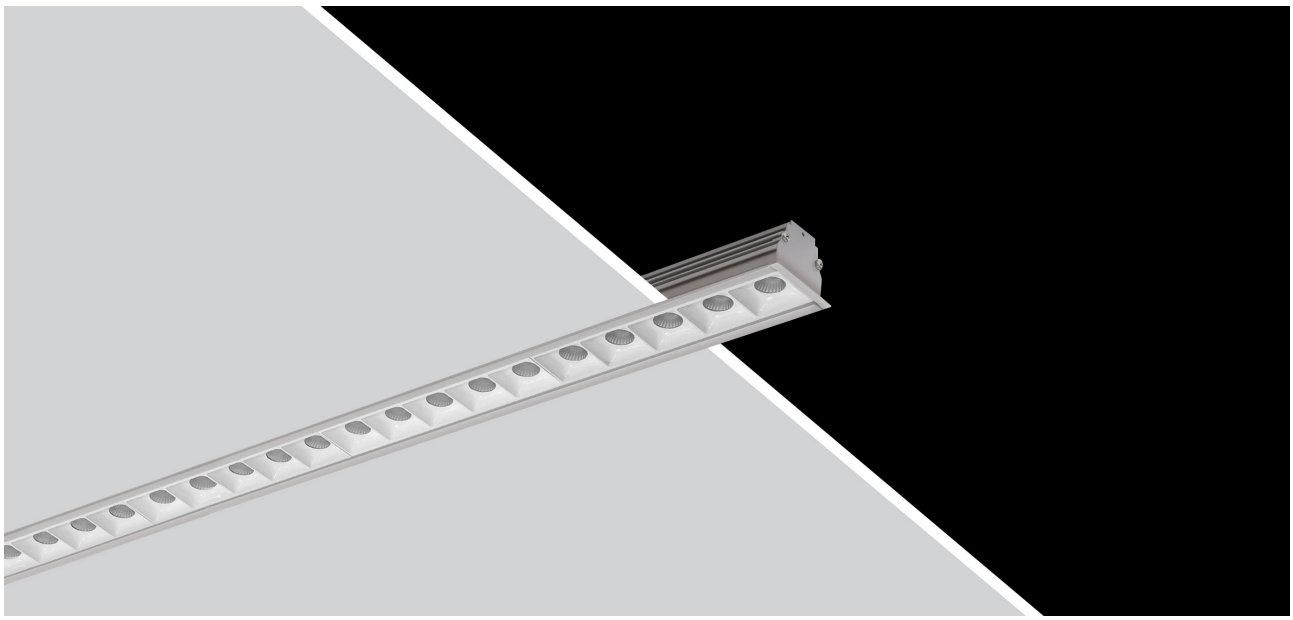

RAL COLORS

Std. 9006

Opt. 9005 9016


DLG/WWWWW

IP20 | RoHS COMPLIANT | CE

Code	Beam Angle	Luminous Flux	System Power	Weight
DLG/WWWWW	45°	6.300 lm	55 W	2.4 Kg


HCL

Body: Aluminum extrusion
Reflector: PC
Driver: Included
Voltage: 220~240VAC
Color Temperature: 2700-3000-4000-5000-6500K, TW
Led: Mid Power

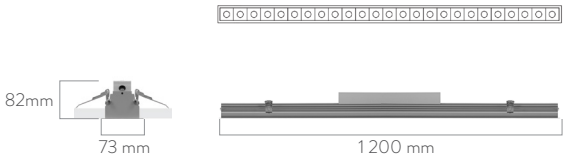


BOX DIMENSIONS
122x10x10cm

BOX WEIGHT
2.8 kg



RAL COLORS
Std.
9006
Opt.
9005
9016

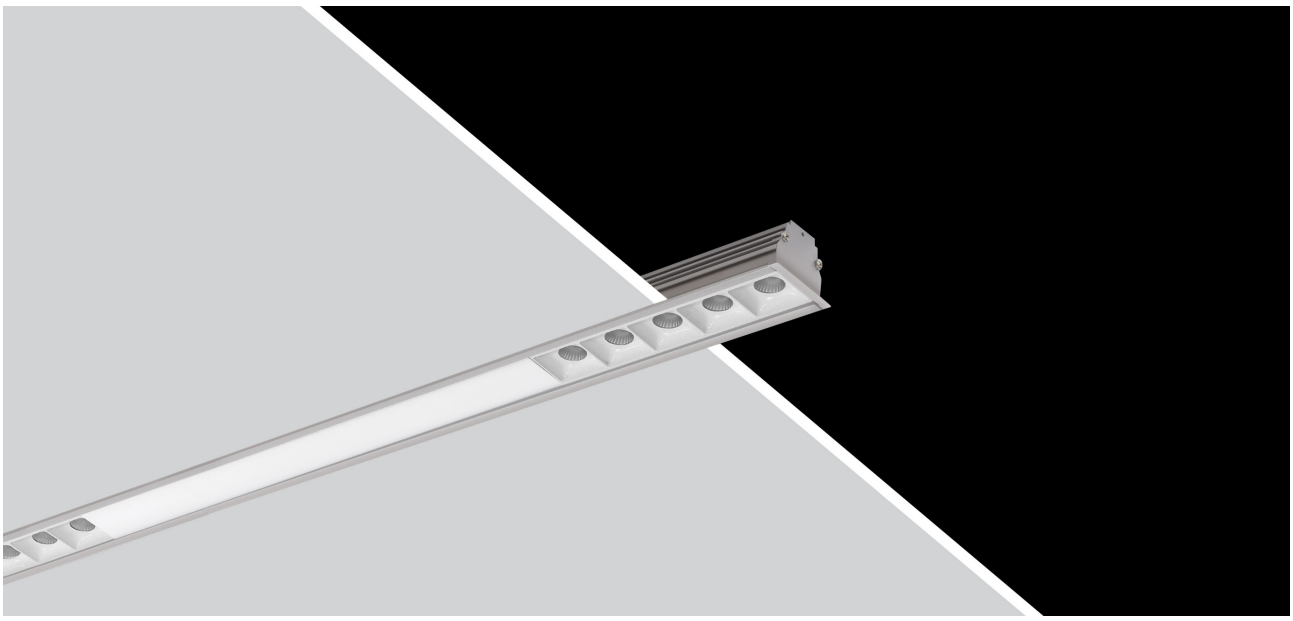

DLG/WOOOW


IP20 | RoHS COMPLIANT | CE

Code	Beam Angle	Luminous Flux	System Power	Weight
DLG/WOOOW	50°	5.200 lm	55 W	2.3Kg

Body: Aluminum extrusion
Diffuser: Opal
Reflector: PC


Lens: PMMA
Driver: Included
Voltage: 220~240VAC


Color Temperature: 2700-3000-4000-5000-6500K
Led: Mid Power

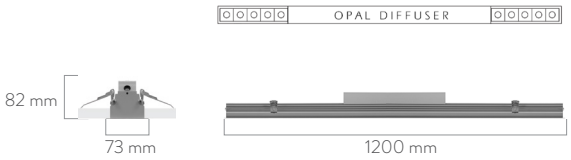

BOX DIMENSIONS
122x10x10cm

BOX WEIGHT
2.7 kg



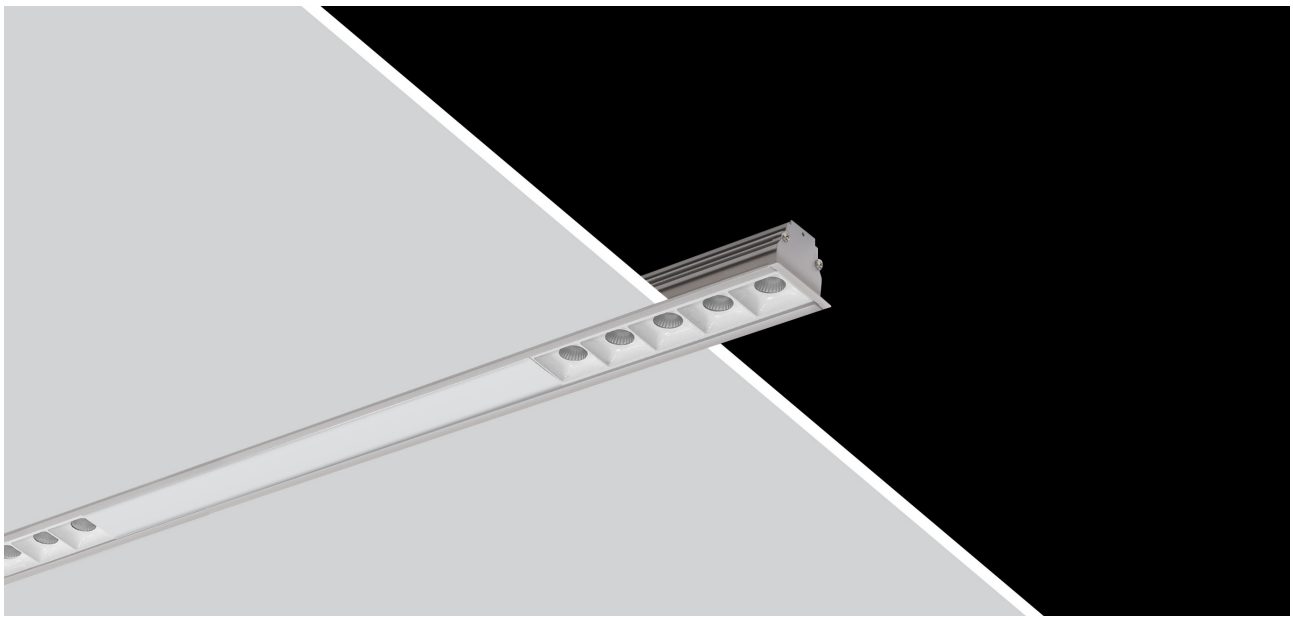

RAL COLORS

Std.
9006

Opt.
9005
9016

DLG/WCCCW


IP20 | RoHS COMPLIANT | CE

Code	Beam Angle	Luminous Flux	System Power	Weight
DLG/WCCCW	45°	2.900 lm	22 W	2.3Kg

Body: Aluminum extrusion
Reflector: PC
Lens: PMMA


Driver: Included
Voltage: 220~240VAC

Color Temperature: 2700-3000-4000-5000-6500K
Led: Mid Power

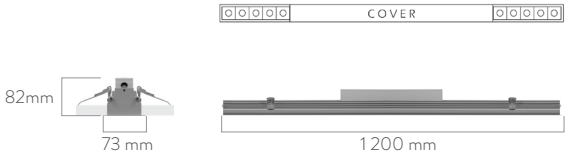


BOX DIMENSIONS
122x10x10cm

BOX WEIGHT
2.7 kg



RAL COLORS
Std.
9006
Opt.
9005
9016

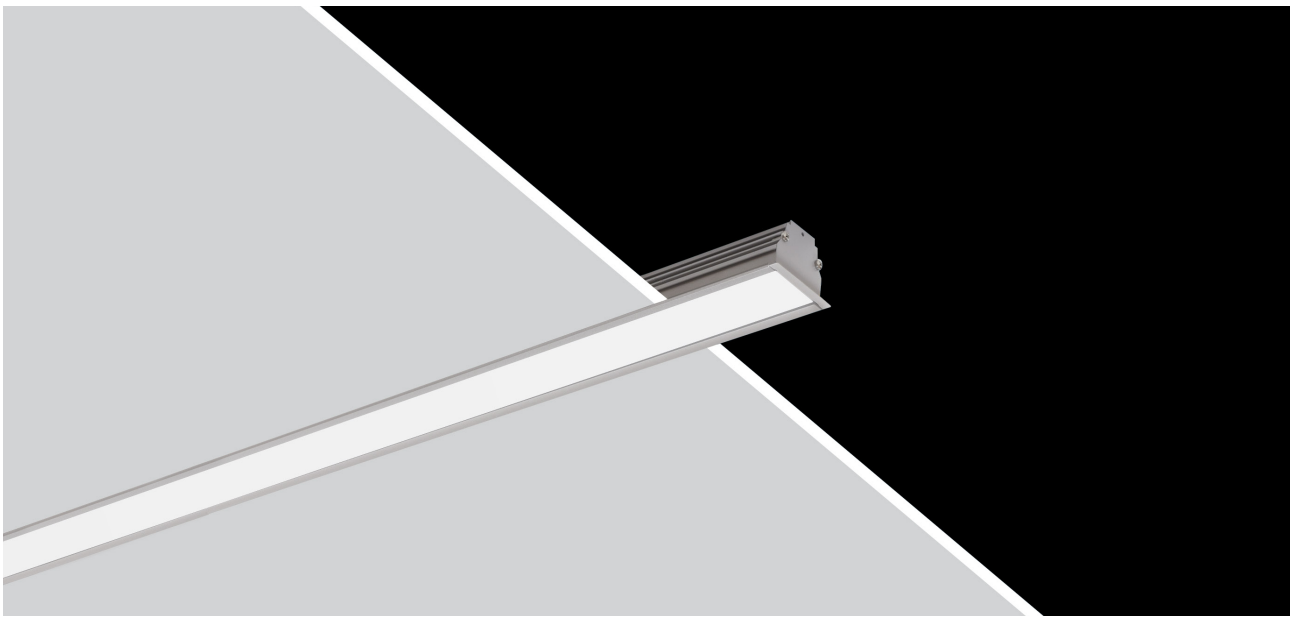


DLG/OPAL

IP20 | RoHS COMPLIANT | CE

Code	Beam Angle	Luminous Flux	System Power	Weight
DLG/O	110°	3.300 lm	35 W	2.3Kg


Body: Aluminum extrusion
Driver: Included
Diffuser: Opal
Voltage: 220~240VAC
Color Temperature: 2700-3000-4000-5000-6500K
Led: Mid Power Led






BOX DIMENSIONS
122x10x10cm

BOX WEIGHT
2.7 kg



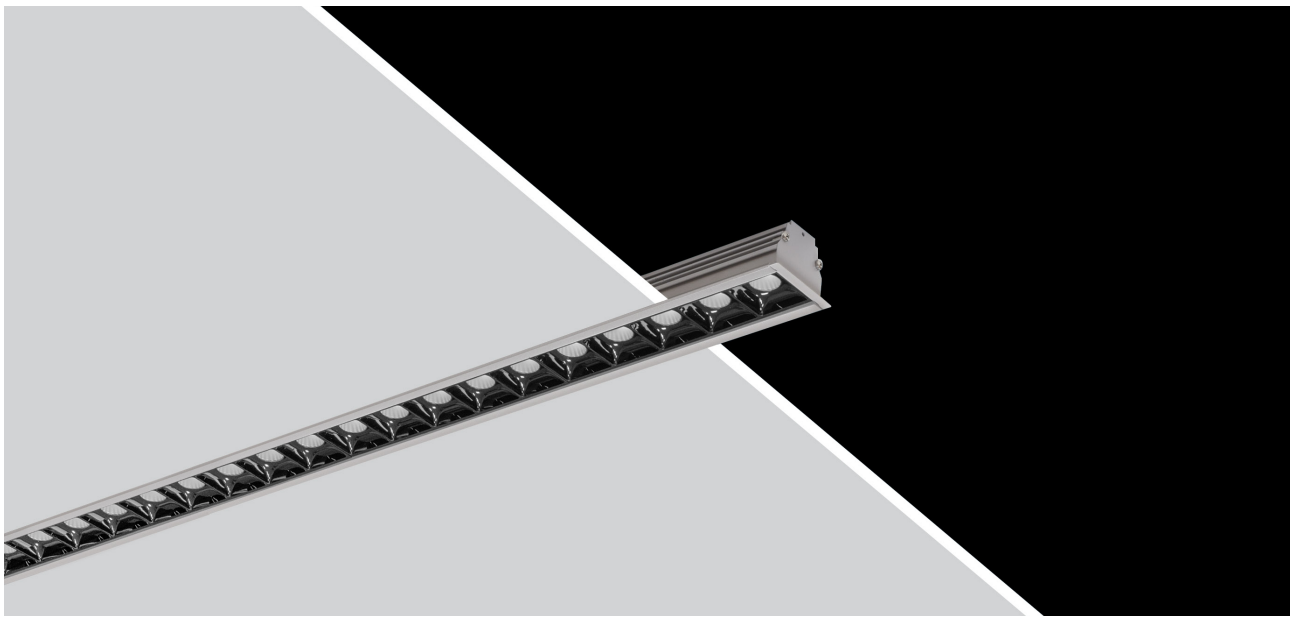

RAL COLORS

Std.
9006

Opt.
9005
9016

DLG/BBBBB

IP20 | RoHS COMPLIANT | CE


Code	Beam Angle	Luminous Flux	System Power	Weight
DLG/BBBBB	45°	6.300 lm	55 W	2.4 Kg

HCL

Body: Aluminum extrusion
Reflector: PC
Driver: Included


lens: PMMA
Voltage: 220~240VAC

Color Temperature: 2700-3000-4000-5000-6500K, TW
Led: Mid Power Led

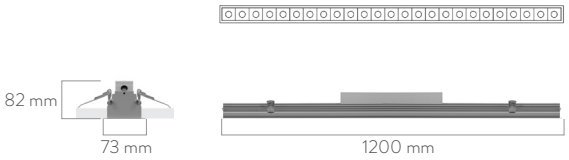


BOX DIMENSIONS
122x10x10cm

BOX WEIGHT
2.8 kg



RAL COLORS
Std.
9006
Opt.
9005
9016

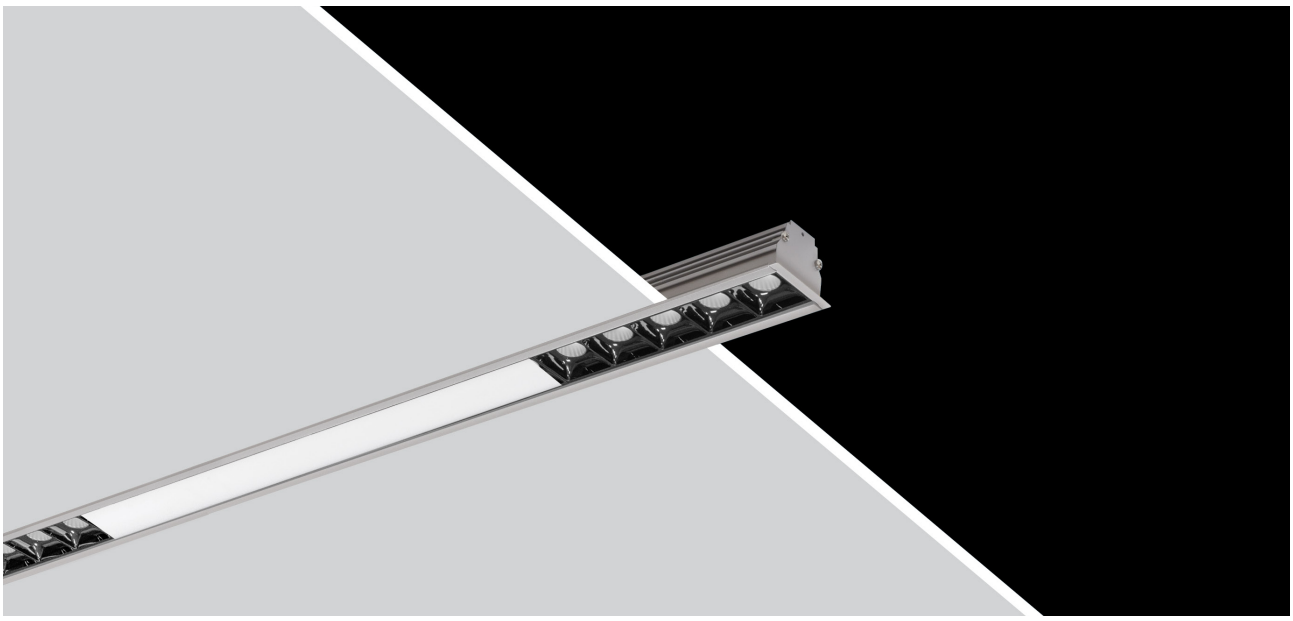

DLG/BOOOB


IP20 | RoHS COMPLIANT | CE

Code	Beam Angle	Luminous Flux	System Power	Weight
DLG/BOOOB	50°	5.200 lm	55 W	2.3Kg

Body: Aluminum extrusion
Diffuser: Opal
Reflector: PC


Lens: PMMA
Driver: Included
Voltage: 220~240VAC


Color Temperature: 2700-3000-4000-5000-6500K
Led: Mid Power

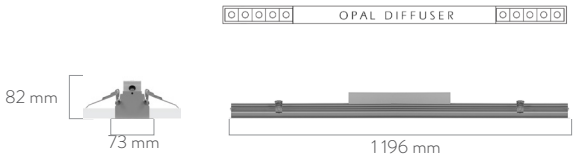

BOX DIMENSIONS
122x10x10cm

BOX WEIGHT
2.7 kg



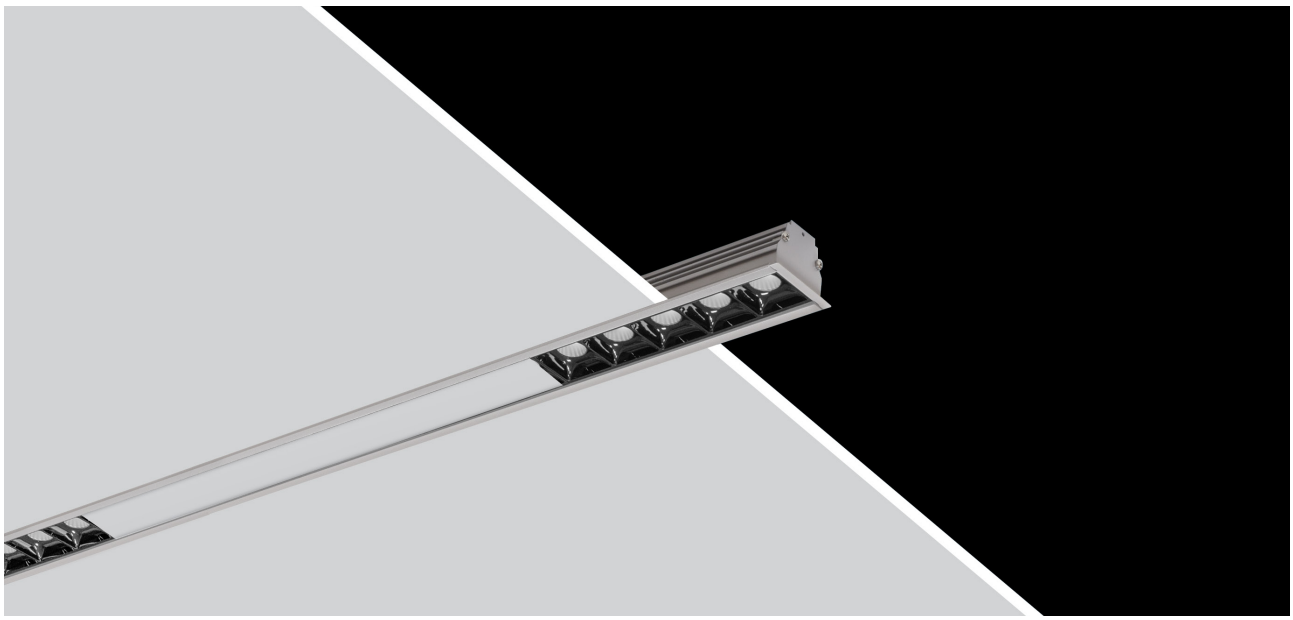

RAL COLORS

Std.
9006

Opt.
9005
9016

DLG/BCCCB


IP20 | RoHS COMPLIANT | CE

Code	Beam Angle	Luminous Flux	System Power	Weight
DLG/BCCCB	45°	2.900 lm	22 W	2.3Kg

Body: Aluminum extrusion
Reflector: PC
Lens: PMMA


Driver: Included
Voltage: 220~240VAC


Color Temperature: 2700-3000-4000-5000-6500K
Led: Mid Power

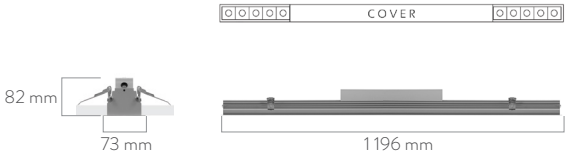

BOX DIMENSIONS
122x10x10cm

BOX WEIGHT
2.7 kg




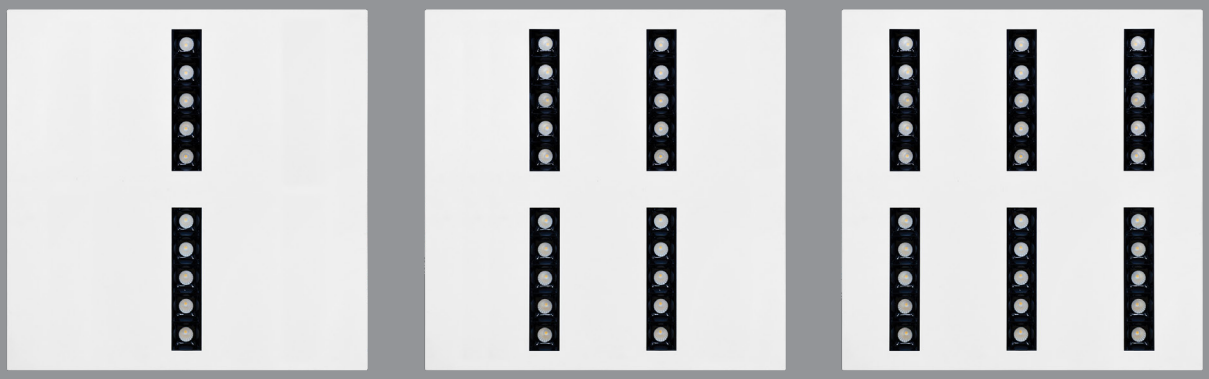

DARKZONE
Decorative Systems

DarkZone provides a comfortable lighting experience by minimizing glare in spaces such as offices and laboratories. By technically optimizing glare values, DarkZone enhances luminaire efficiency while preventing eye strain. With its modern design and high performance, DarkZone offers both aesthetic and functional solutions for workspaces, elevating lighting quality to the next level.


Body Types



Flat

Perforated

INDEX

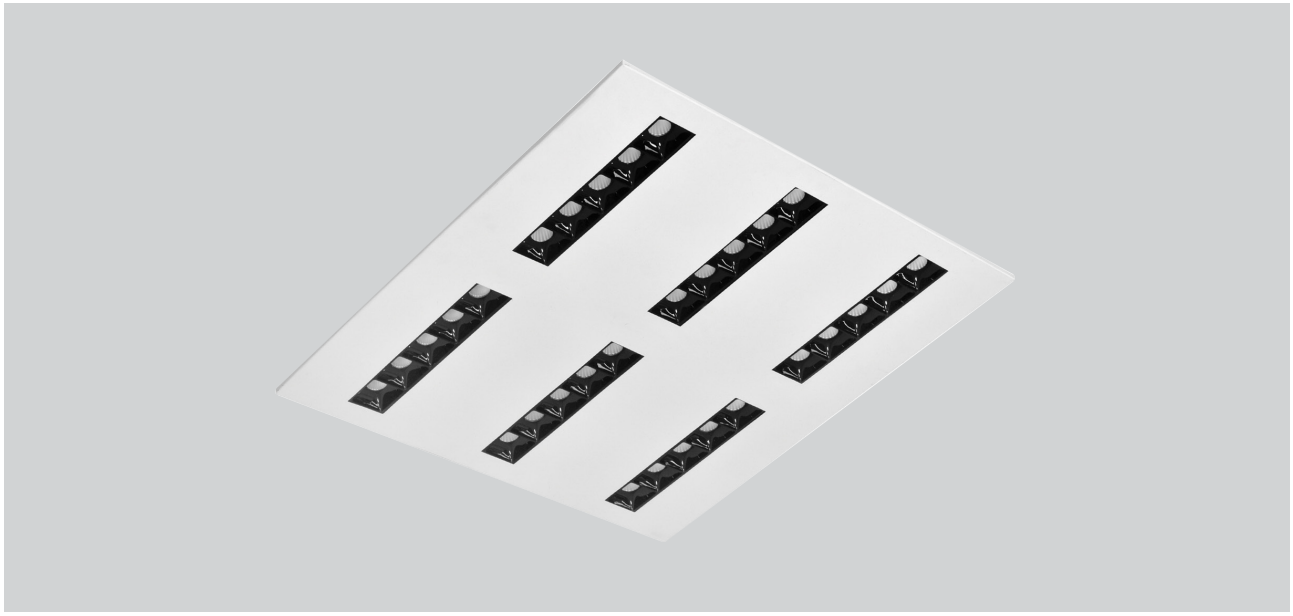

RAL COLORS

Std.
9016

Opt.
9005
9006

LGR

IP20 | RoHS COMPLIANT | CE


Code	Beam Angle	Luminous Flux	System Power	Weight
LGR 60/1	45°	3.150 lm	35 W	2.7Kg
LGR 60/2	45°	4.250 lm	45 W	2.9Kg
LGR 60/3	45°	5.850 lm	60 W	3.1 Kg

HCL

Body: DKP sheet metal
Reflector: PC
Lens: PMMA


Driver: Included
Voltage Range: 220~240 VAC

Color Temperature: 2700-3000-4000-5000-6500K, TW
Led: Mid Power

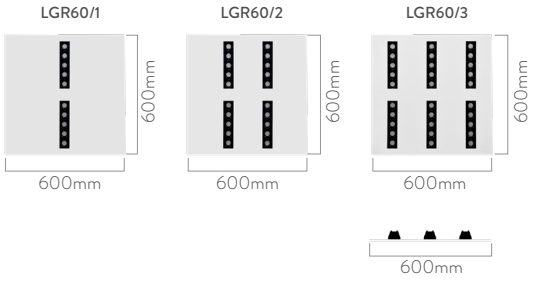


BOX DIMENSIONS
67x61x10cm

BOX WEIGHT
LGR60/3 3.5kg
LGR60/2 3.2kg
LGR60/1 3 kg



RAL COLORS
Std.
9016
Opt.
9005
9006

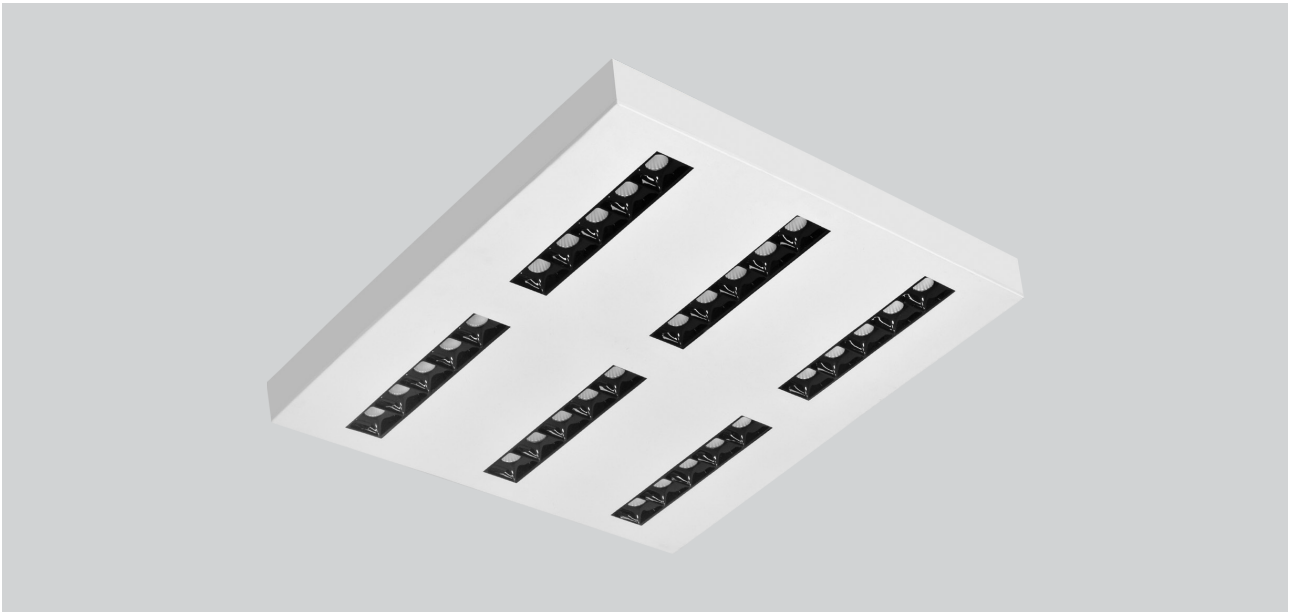

LSR

IP20 | RoHS COMPLIANT | CE


Code	Beam Angle	Luminous Flux	System Power	Weight
LSR 60/1	45°	3.150 lm	35 W	4.3 Kg
LSR 60/2	45°	4.250 lm	45 W	4.5 Kg
LSR 60/3	45°	5.850 lm	60 W	4.7 Kg
LSR 30/1	45°	1.450 lm	13 W	1.8 Kg
LSR 30/2	45°	2.900 lm	26 W	1.9 Kg


HCL

Body: DKP sheet metal
Reflector: PC
Lens: PMMA

Driver: Included
Voltage: 220~240 VAC


Color Temperature: 2700-3000-4000-5000-6500K
Led: Mid Power

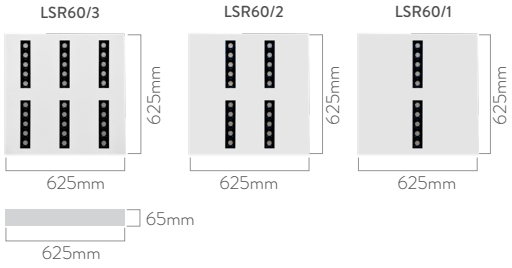




BOX DIMENSIONS
LSR60 64x64x10cm
LSR30 36x36x10cm

BOX WEIGHT
LSR60/1 4.6 kg
LSR60/2 4.8 kg
LSR60/3 5.1 kg
LSR30/2 2.1 kg
LSR30/1 2kg



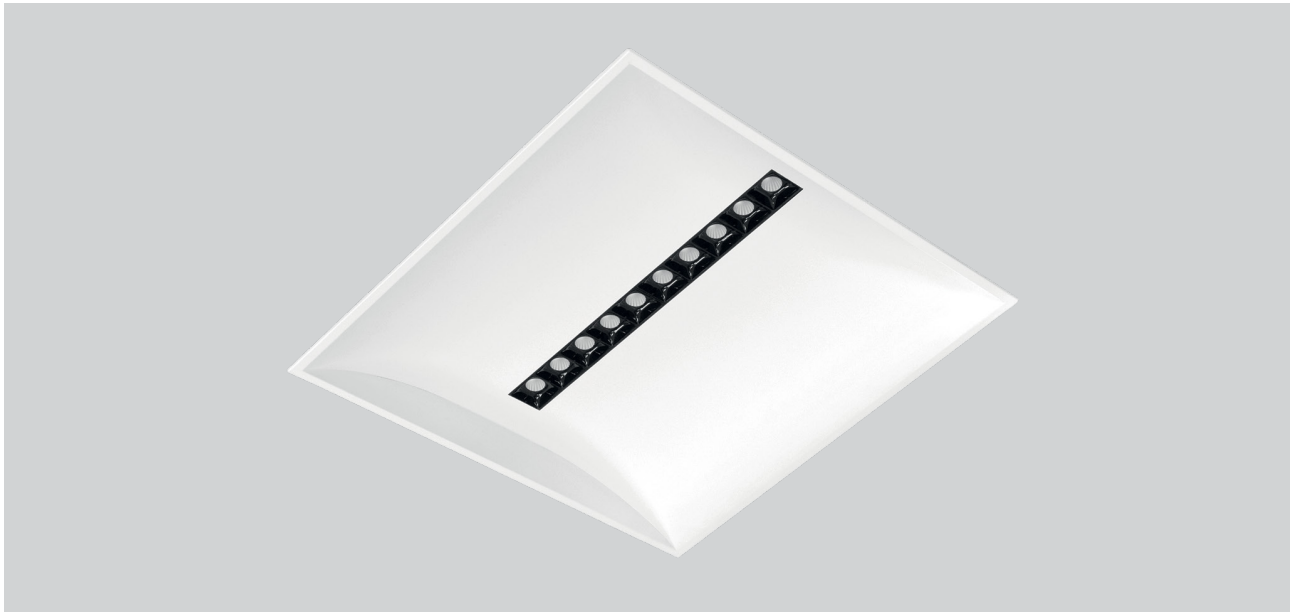

RAL COLORS

Std.
9016

Opt.
9005
9006

PGR

IP20 | RoHS COMPLIANT | CE


Code	Beam Angle	Luminous Flux	System Power	Weight
PGR 60	45°	3.150 lm	35 W	3.5 Kg

Body: DKP sheet metal
Reflector: PC
Lens: PMMA

Driver: Included
Voltage: 220~240 VAC


Color Temperature: 2700-3000-4000-5000-6500K
Led: Mid Power

Code	Ceiling Type	a	b
PGR 60	Gypsum	595mm	595mm
PGR 60	Clip-In	599mm	599mm
PGR 60	Modular	595mm	595mm



BOX DIMENSIONS
65x64x14cm

BOX WEIGHT
4 kg






THIN-LINE
Decorative Systems

THIN-LINE, which combines linear lighting with aesthetics, is a new surface-mounted luminaire. With this product, ideal for offices, meeting rooms, lobbies, corridors, healthcare, and retail spaces, you can create different configurations. Thanks to its optics with a wide variety of light distributions, it offers flexibility in many projects. Its slim design provides seamless lighting while delivering the comfort of glare-free illumination.


INDEX

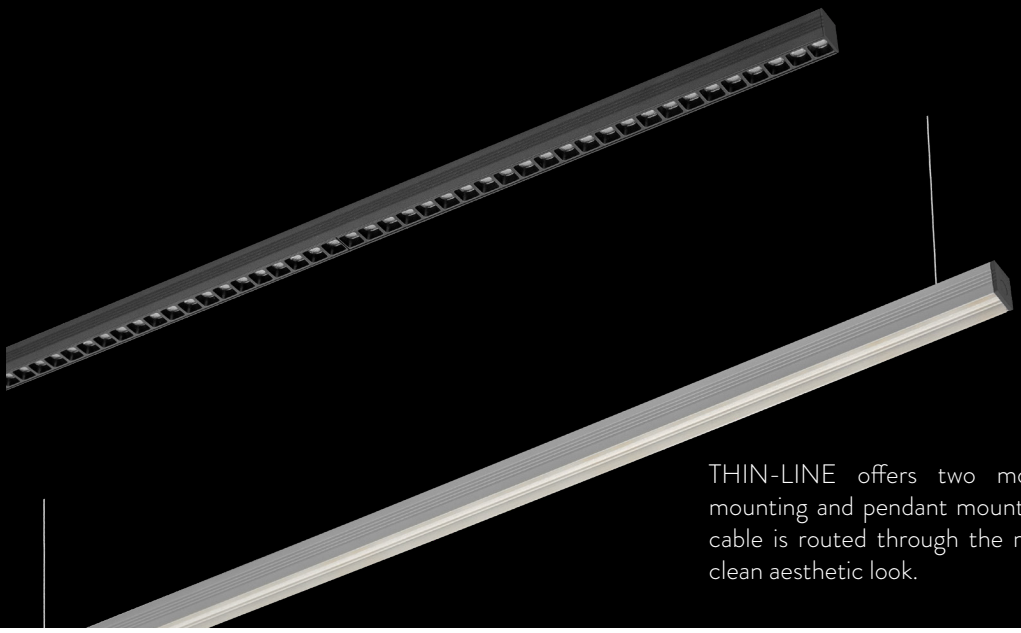


THIN-LINE offers two mounting options: surface mounting and pendant mounting. The luminaire's power cable is routed through the mounting wire, providing a clean aesthetic look.



These small reflectors provide high-quality, glare-free lighting. They offer an effective solution for meeting architectural lighting needs in compact, stylish environments where low-glare illumination is required. Thanks to these features, they are an ideal choice for modern designs.



Lenses made of high-quality PMMA material are durable and lightweight. These lenses also allow the creation of efficient, seamless luminaires without visible gaps. With excellent light control and quality, these lenses are reliable and versatile lighting solution that can be used in a wide range of applications.

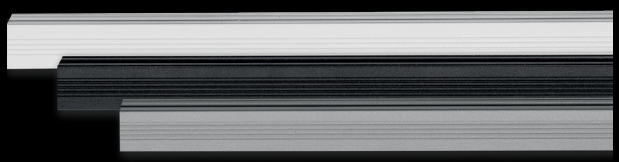


3 DIFFERENT COLORS

The luminaires are available in three color options: white, black, and gray. This range of choices enables users to select a color that complements the interior design of their spaces. As a result, the fixtures can blend more harmoniously with their surroundings while enhancing the overall aesthetic appeal.

INDEX

RAL COLORS
Std.
9016
Opt.
9005
9006

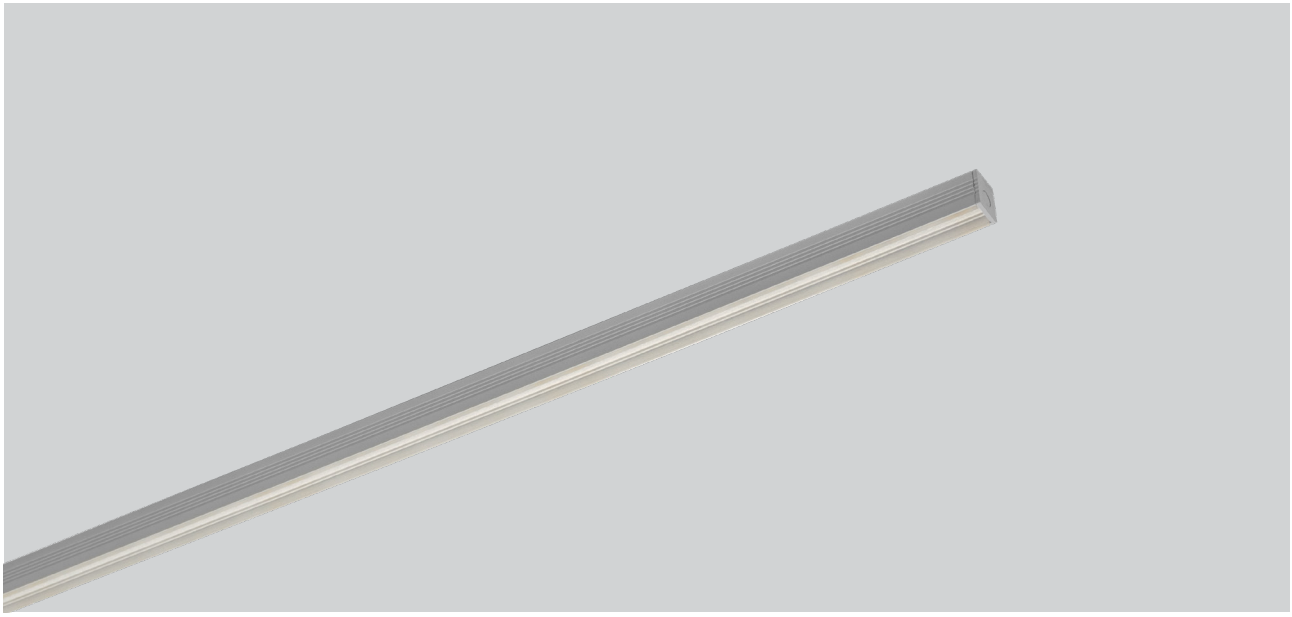

DFR10/L

IP20 | RoHS COMPLIANT | CE

Code	Beam	Luminous Flux	System Power	Weight
DFR10/L 100	30°+85°	2.650 lm	17 W	0.3 Kg
DFR10/L 100	40°+95°	2.720 lm	17 W	0.3 Kg
DFR10/L 100	45°+95°	2.750 lm	17 W	0.3 Kg
DFR10/L 100	Asymmetrical	2.690 lm	17 W	0.3 Kg
DFR10/L 100	123°	2.140 lm	17 W	0.3 Kg

Body: Aluminum extrusion
Diffuser: PMMA lens
CRI: >80


Driver: Included
Voltage: 24VDC


Color Temperature: 2700-3000-4000-5000-6500K
Led: Mid Power



Code	a	b	c
DFR 10/L 50	514 mm	15 mm	18 mm
DFR 10/L100	1014 mm	15 mm	18 mm
DFR 10/L150	1514 mm	15 mm	18 mm


Can be produced in multiples of 5 cm



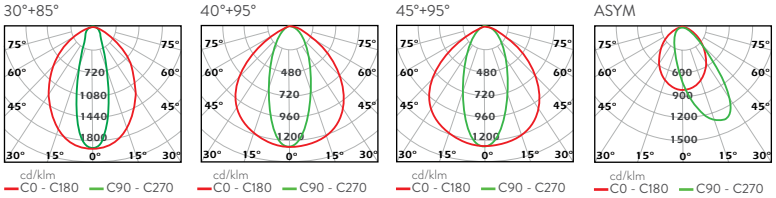

BOX DIMENSIONS
DFR10/50 105x5x5cm
DFR10100 125x5x5cm
DFR10/150 155x5x5cm

BOX WEIGHT
DFR10/50 0.3Kg
DFR10/100 0.6 Kg
DFR10/150 0.8 Kg

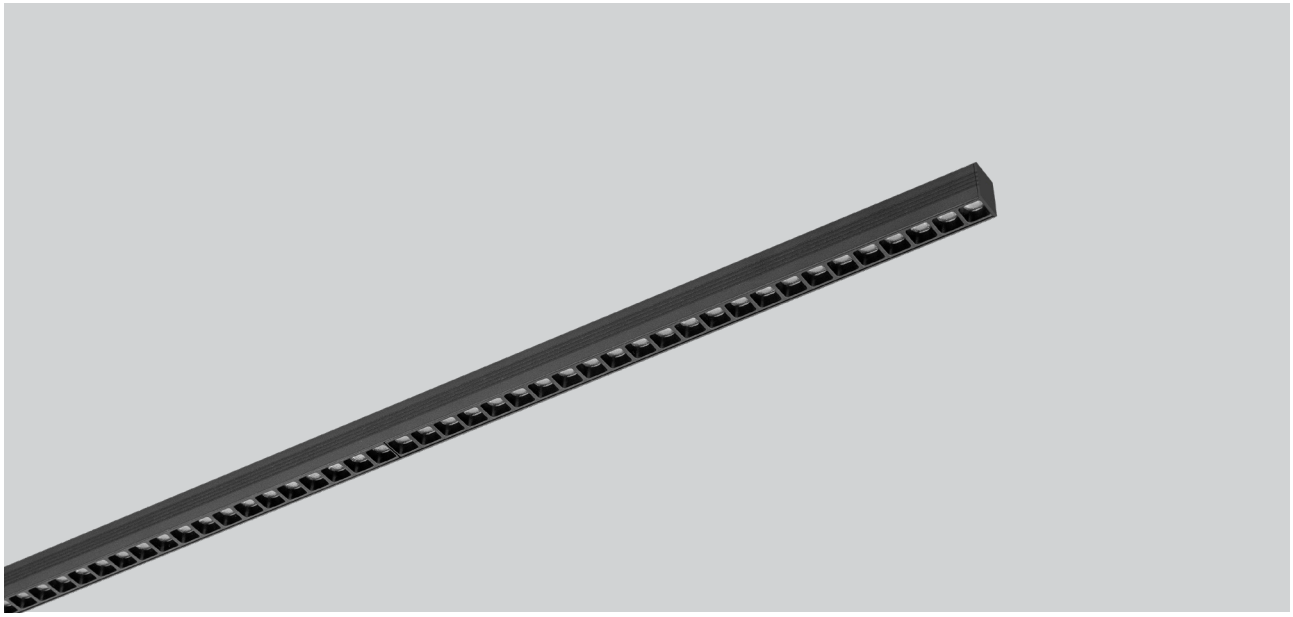

RAL COLORS

Std.
9016

Opt.
9005
9006

DFR10/R

IP20 | RoHS COMPLIANT | CE

Code	Beam	Luminous Flux	System Power	Weight
DFR10/R 100	35°	1.300 lm	17 W	0.3 Kg
DFR10/R 100	40°	1.600 lm	17 W	0.3 Kg
DFR10/R 100	45°	1.200 lm	17 W	0.3 Kg

Body: Aluminum extrusion
Reflector: PMMA

Driver: Included
Voltage: 220~240VAC


Color Temperature: 2700-3000-4000-5000-6500K
Led: Mid Power



Code	a	b	c
DFR 10/R50	562 mm	15 mm	18 mm
DFR 10/R100	1120 mm	15 mm	18 mm
DFR 10/R150	1676 mm	15 mm	18 mm

BOX DIMENSIONS
DFR10/50 105x5x5cm
DFR10/100 125x5x5cm
DFR10/150 155x5x5cm


BOX WEIGHT
DFR10/50 0.3Kg
DFR10/100 0.6 Kg
DFR10/150 0.8 Kg

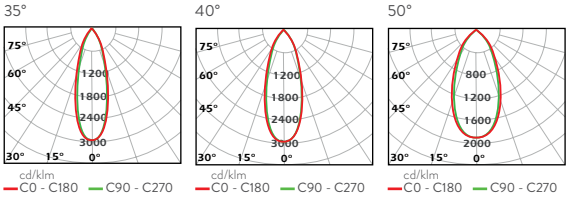



LUMIFLEX
Magnetic Track System

Lumiflex is crafted with a focus on flexibility and effortless installation. Featuring multiple modules that can be seamlessly replaced and repositioned along the track, it delivers a level of customization that stands out in the industry. Whether you need lighting for commercial spaces, retail stores, hotels, residential areas, or exhibition halls, Lumiflex provides the perfect solution to meet your needs.

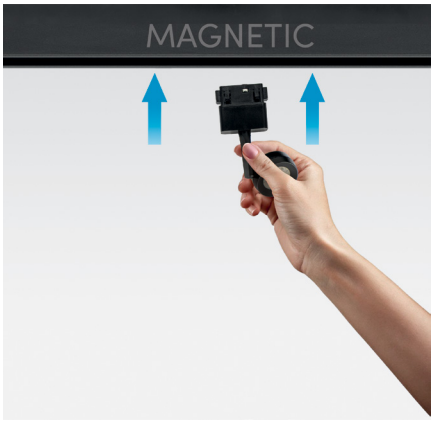

INDEX





RAL COLORS

Std.
9005

Opt.
9016
9006

MLA

IP20 | RoHS COMPLIANT | CE


Code	Beam Angle	Luminous Flux	System Power	Weight
MLA6	36°	420lm	6W	0.05 kg
MLA12	36°	840lm	12W	0.09 kg
MLA18	36°	1260lm	18W	0.135 kg
MLA24	36°	1680lm	24W	0.180kg


HCL


Body: Aluminum Injection
Driver: Included
Lens: PMMA

Voltage: 48VDC
CRI: 90
Finishes: Black

Color Temperature: 3000-4000-5000K, Tunable White
Led: Mid-Power



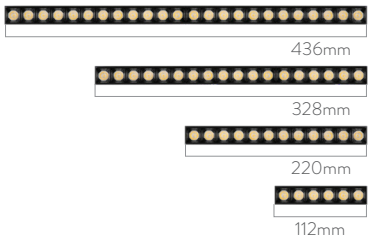





RAL COLORS

Std.
9005

Opt.
9016
9006

MLO

IP20 RoHS CE


Code	Beam Angle	Luminous Flux	System Power	Weight
MLO12	120°	820lm	12W	0.08 kg
MLO24	120°	1630lm	24W	0.14 kg

HCL

Body: Aluminum Injection
Driver: Included
Diffuser: Opal

Voltage: 48VDC
CRI: 90


Color Temperature: 3000-4000-5000K, Tunable White
Led: Mid-Power





a

Code	a
MLO12	218mm
MLO24	434mm





RAL COLORS

Std.
9005

Opt.
9016
9006

MLP

IP20 | RoHS COMPLIANT | CE

Code	Beam Angle	Luminous Flux	System Power	Weight
MLP12	110°	1100lm	12W	0.14 kg
MLP24	110°	2200lm	24W	0.14 kg

HCL

Body: Aluminum Injection
Driver: Included
Diffuser: Prismatic lens


Finishes: Black
Voltage: 48VDC
CRI: 90

Color Temperature: 3000-4000-5000K, Tunable White
Led: Mid-Power





Code	a
MLP12	218mm
MLP24	434mm







RAL COLORS
Std.
9005


MPZ (Zoomable)

IP20 | RoHS COMPLIANT | CE

Code	System Power	LED	CRI	Weight
MPZ	10W	COB	>90	0.35 kg

HCL


Body: Aluminum Injection
Finishes: Black
Voltage: 48VDC
Driver: Included
Color Temperature: 3000-4000-5000K, Tunable White
Led: COB

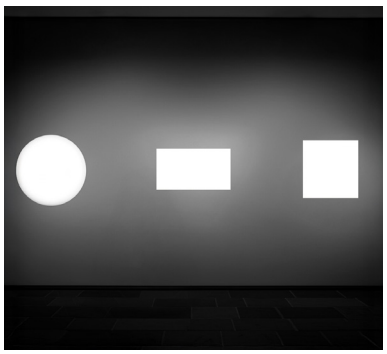



1- Exhibition room (Painting, artwork)
2- Brand and Logo Projection
3- Store and Shopping Mall Guidance
4- Event and Organization Lighting
5- Special Atmosphere and Theme Creation







RAL COLORS

Std.

9005

MGZ (Zoomable)

IP20 | RoHS COMPLIANT | CE

Code	Beam	System Power	Luminous Flux	CRI	Weight
MGZ45	15°-50°	6W	510lm-570lm	>90	0.24 kg
MGZ65	15°-50°	15W	1200lm-1275lm	>90	0.41 kg

HCL

Body: Aluminum Injection
Finishes: Black

Voltage: 48VDC
Driver: Included


Color Temperature: 3000-4000-5000K, Tunable White (only MGZ65)
Led: COB


MGZ45




MGZ65











RAL COLORS
Std.
9005

MSZ (Zoomable)

IP20 | RoHS COMPLIANT | CE

Code	System Power	LED	CRI	Weight
MSZ40	3W	Power Led	>90	0.13 kg
MSZ50	6W	COB	>90	0.22 kg


Body: Aluminum Injection
Finishes: Black
Voltage: 48VDC
Driver: Included
Color Temperature: 3000-4000-5000K

MSZ40



MSZ50







RAL COLORS

Std.

9005

MLZ (Zoomable)


IP20 | RoHS COMPLIANT | CE


Code	System Power	LED	CRI	Weight
MLZ	8W	COB	>90	0.25Kg

Body: Aluminum Injection
Finishes: Black

Voltage: 48VDC
Driver: Included

Color Temperature: 3000-4000-5000K







RAL COLORS
Std.
9005

MSD

IP20 | RoHS COMPLIANT | CE

Code	Beam Angle	Luminous Flux	System Power	CRI	Weight
MSD30	24°	450lm	5W	>90	0.1 kg
MSD40	24°	720lm	8W	>90	0.15 kg
MSD50	24°	1350lm	15W	>90	0.25 kg

Body: Aluminum Injection
Finishes: Black
Voltage: 48VDC
Driver: Included
Color Temperature: 3000-4000-5000K
LED: COB

MSD30





MSD40




MSD50







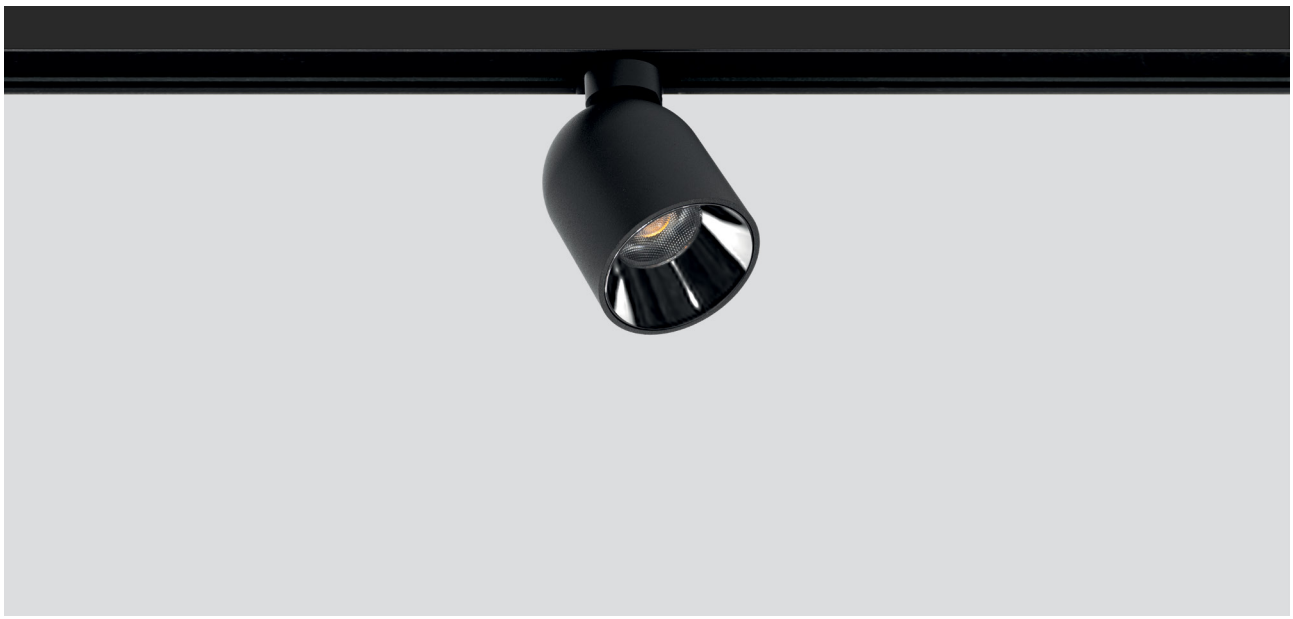

RAL COLORS

Std.

9005

MSU

IP20 | RoHS COMPLIANT | CE


Code	System Power	LED	CRI	Weight
MSU	4W	COB	>90	0.2 kg


Body: Aluminum Injection
Finishes: Black

Voltage: 48VDC
Driver: Included

Color Temperature: 3000-4000-5000K





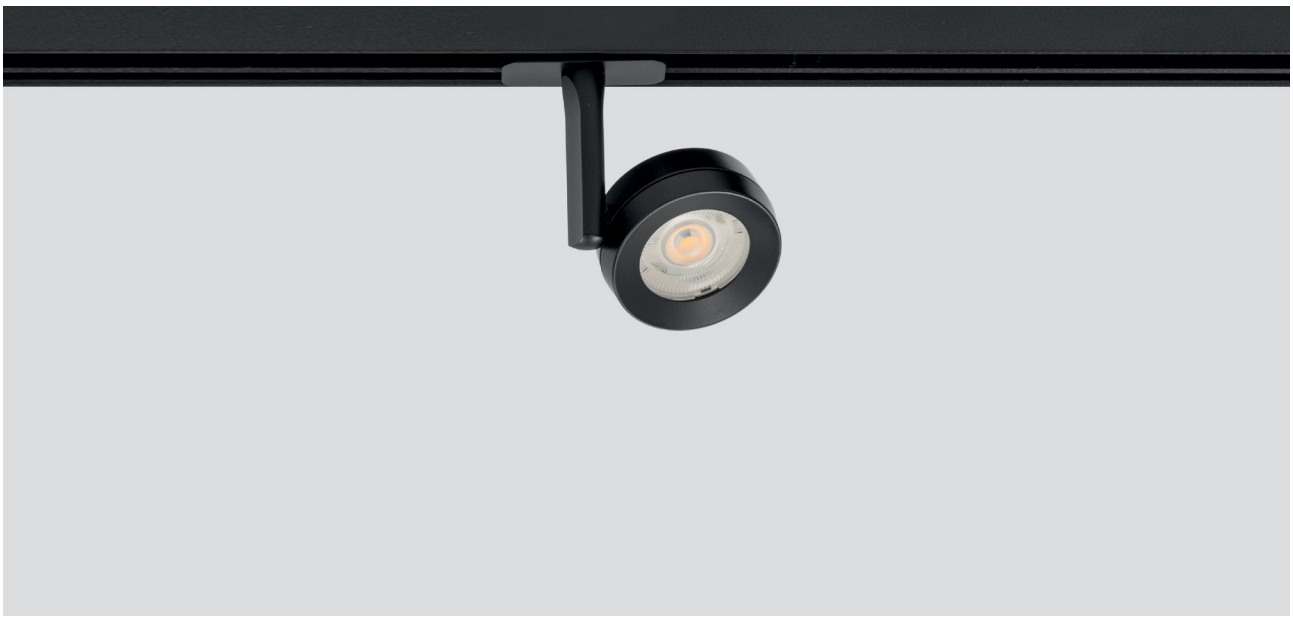

RAL COLORS

Std.

9005


MSY

IP20 | RoHS COMPLIANT | CE

Code	System Power	LED	CRI	Weight
MSY	3W	COB	>90	0.08 kg

Body: Aluminum Injection
Finishes: Black
Voltage: 48VDC
Driver: Included
Color Temperature: 3000-4000-5000K







RAL COLORS

Std.

9005

MSO

IP20 RoHS COMPLIANT CE

Code	System Power	LED	CRI	Weight
MSO	5W	COB	>90	0.44 kg

Body: Aluminum Injection
Finishes: Black

Voltage: 48VDC
Driver: Included

Color Temperature: 3000-4000-5000K



Ø100mm

Diffused



RAL COLORS

Std.

9005


MSK

IP20 | RoHS COMPLIANT | CE

Code	Beam Angle	Luminous Flux	System Power	CRI	Weight
MSK	24°	180lm	3W	>90	0.1 kg

Body: Aluminum Injection
Finishes: Black
Voltage: 48VDC
Driver: Included
Color Temperature: 3000-4000-5000K
LED: Power Led







RAL COLORS

Std.

9005

MNY


IP20 | RoHS COMPLIANT | CE


Code	Beam Angle	Luminous Flux	System Power	CRI	Weight
MNY	24°	180lm	3W	>90	0.05 kg

Body: Aluminum Injection
Finishes: Black

Voltage: 48VDC
Driver: Included

Color Temperature: 3000-4000-5000K
LED: Power Led







RAL COLORS

Std.


9005


MNK

IP20 | RoHS COMPLIANT | CE

Code	Beam Angle	Luminous Flux	System Power	CRI	Weight
MNK	24°	100lm	3W	>90	0.05 kg

Body: Aluminum Injection
Finishes: Black
Voltage: 48VDC
Driver: Included
Color Temperature: 3000-4000-5000K
Led: Power Led







RAL COLORS

Std.

9005

MNC


IP20 | RoHS COMPLIANT | CE


Code	System Power	LED	CRI	Weight
MNC	3W	Power Led	>90	0.06 kg

Body: Aluminum Injection
Finishes: Black

Voltage: 48VDC
Driver: Included

Color Temperature: 3000-4000-5000K







RAL COLORS
Std.
9005

MNS

IP20 | RoHS COMPLIANT | CE

Code	System Power	LED	CRI	Weight
MNS	3W	Power Led	>90	0.06 kg

Body: Aluminum Injection
Finishes: Black
Voltage: 48VDC
Driver: Included
Color Temperature: 3000-4000-5000K







RAL COLORS

Std.

9005

MNZ (Zoomable)


IP20 | RoHS COMPLIANT | CE

Code	System Power	LED	CRI	Weight
MNZ	3W	Power Led	>90	0.05 kg

Body: Aluminum Injection
Finishes: Black

Voltage: 48VDC
Driver: Included

Color Temperature: 3000-4000-5000K







RAL COLORS
Std.
9005


MNM

IP20 | RoHS COMPLIANT | CE

Code	System Power	LED	CRI	Weight
MNM	3x1.5W	Power Led	>90	0.11 kg

Body: Aluminum Injection
Finishes: Black
Voltage: 48VDC
Driver: Included
Color Temperature: 3000-4000-5000K







RAL COLORS

Std.

9005

MPC

IP20 | RoHS COMPLIANT | CE

Code	System Power	LED	CRI	Weight
MPC60	1 Modul(6pcs Led) 6W	Mid Power	>90	2.1 kg
MPC90	1 Modul(6pcs Led) 6W	Mid Power	>90	3.2 kg
MPC120	1 Modul(6pcs Led) 6W	Mid Power	>90	4.3 kg

Body: Aluminum extrusion
Reflector: PC
Lens: PMMA


Voltage: 48VDC
Driver: Included

Color Temperature: 3000-4000-5000K



a

Code	a
MPC60	600mm
MPC90	900mm
MPC120	1200mm





RAL COLORS

Std.

9005


MKA

IP20 | RoHS COMPLIANT | CE

Code	System Power	LED	CRI	Weight
MKA	10W	COB	>90	0.35Kg

HCL

Body: Aluminum Injection
Finishes: Black
Voltage: 48VDC
Driver: Included
Color Temperature: 3000-4000-5000K, Tunable White







RAL COLORS

Std.

9005

MKO


IP20 RoHS COMPLIANT CE

Code	System Power	LED	CRI	Weight
MKO60	5W	COB	>90	0.28 kg
MKO85	9W	COB	>90	0.2 kg


Body: Aluminum Injection
Diffuser: Opal
Finishes: Black

Voltage: 48VDC
Driver: Included

Color Temperature: 3000-4000-5000K



Code	a	b
MKO85	85mm	72mm
MKO60	60mm	47mm





RAL COLORS

Std.

9005

MVA

IP20 RoHS COMPLIANT CE

Code	System Power	LED	CRI	Weight
MVA	5W	COB	>90	0.17 kg


Body: Aluminum Injection
Diffuser: Opal
Finishes: Black

Voltage: 48VDC
Driver: Included

Color Temperature: 2700-3000-4000-5000K









RAL COLORS

Std.

9005

MTM

IP20 | RoHS COMPLIANT | CE


Code	System Power	LED	CRI	Weight
MTM	7W	COB+ Midpower	>90	0.24 kg

Body: Aluminum Injection
Diffuser: Opal
Finishes: Black

Voltage: 48VDC
Driver: Included

Color Temperature: 3000-4000-5000K







RAL COLORS

Std.

9005

MSI

IP20 | RoHS COMPLIANT | CE


Code	System Power	LED	CRI	Weight
MSI	3W	Power Led	>90	0.22 kg


Body: Aluminum
Finishes: Black

Voltage: 48VDC
Driver: Included

Color Temperature: 3000-4000-5000K





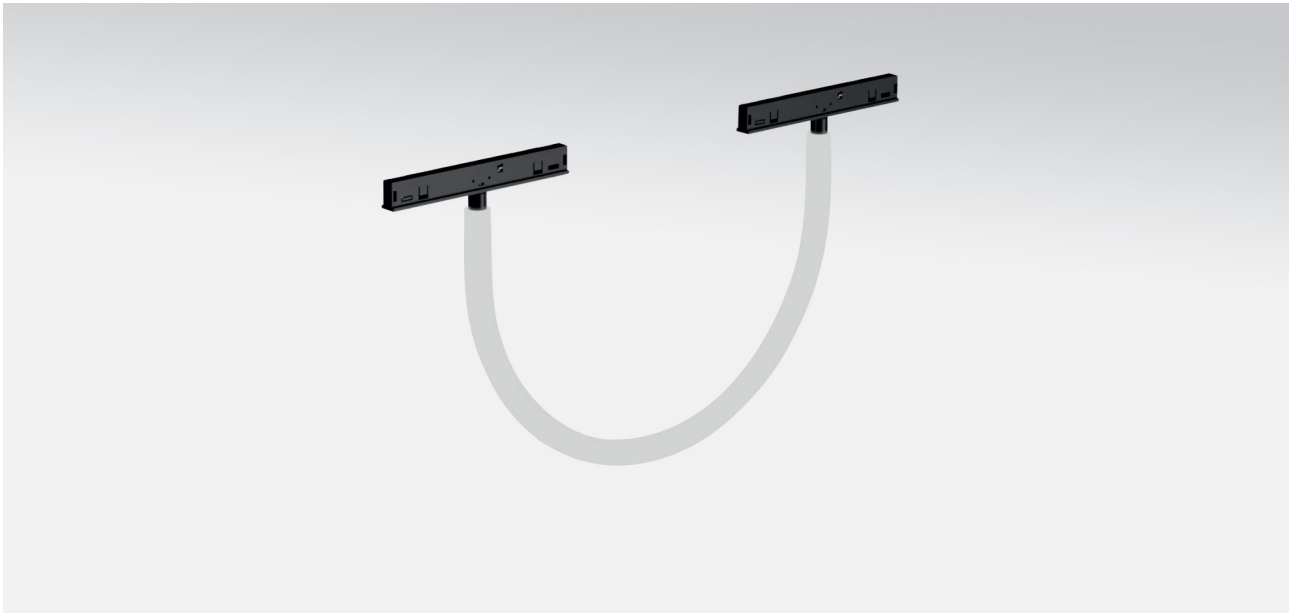

MSN


IP20 | RoHS COMPLIANT | CE

Code	System Power	LED	CRI
MSN	16W	Mid -Power	>90


Body: Silicon
Driver: Included

Voltage: 48VDC

Color Temperature: 3000-4000-5000K

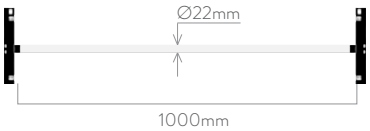

Diffused
360°

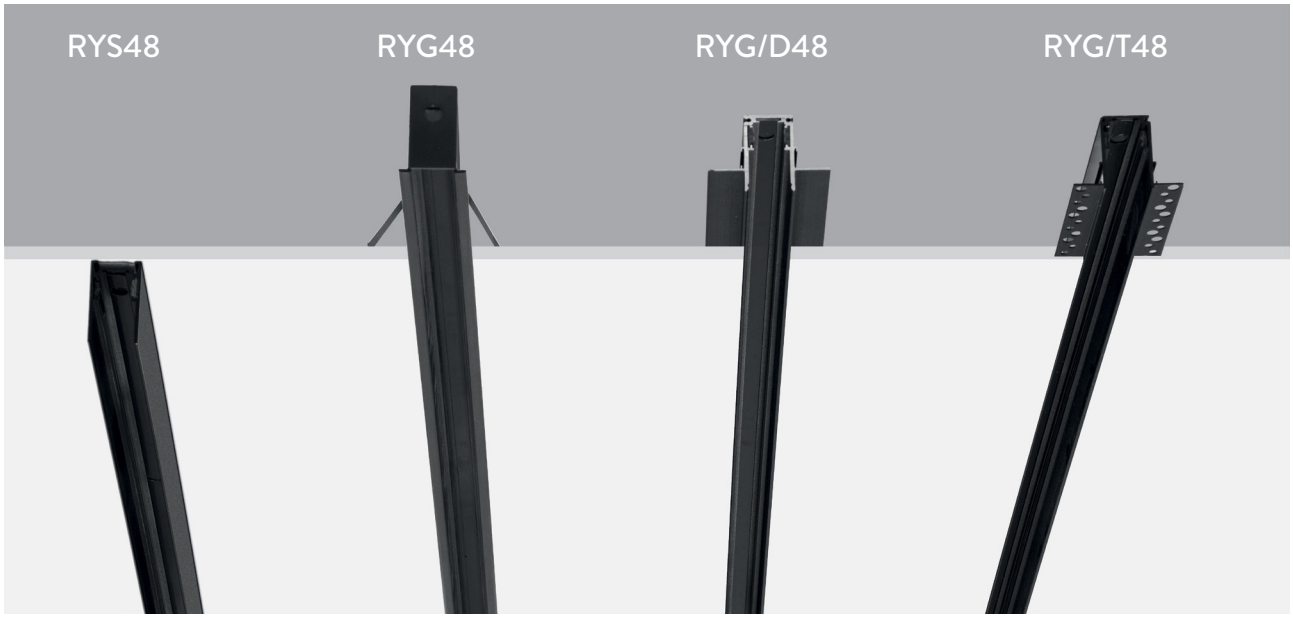

RAL COLORS

Std.

9005

TRACKS

Code	Material	Type	Cut-Out
RYS48	Aluminum extrusion	Surface or Pendant track	-
RYG48	Aluminum extrusion	Recessed track with frame	Width: 28 mm
RYG/D48	Aluminum extrusion	Recessed track without frame (Trimless)	Width: 25.5 mm
RYG/T48	Aluminum extrusion	Recessed track for plastered ceiling (Trimless)	Width: 28 mm

48V Rail Mounting Systems: Flexible and Versatile Installation Solutions

48V rail mounting systems deliver exceptional adaptability, enabling expanded functionality and diverse application possibilities. Designed for versatility, these systems support three distinct mounting configurations:

Surface Mounted – Direct attachment to ceilings or walls for easy deployment.
Recessed – Embedded installation for a clean, unobtrusive look.
Trimless – Seamless, flush integration for a sleek and modern appearance.

With these options, 48V rail systems provide tailored solutions to meet varying architectural and design needs, ensuring both aesthetic appeal and functional efficiency.

RNC



RBP 1



RBP 2



RDR



RBL



RBK



RBA



RST



RKK



RSM



RAL COLORS

Std.

9005

ACCESSORIES

Code	Type
RNC	Track end cap
RBP1	Magnetic track connector 20mm spacer cable 4pin
RBP2	Magnetic track connector 143mm
RDR	48Vdc track power supply socket
RBL	Magnetic track I-connector
RBK	Surface-mounted/pendant 48Vdc track corner 90°
RBA	Track connector apparatus
RST	Track hanging kit + adjustable stopper set
RKK	Track connector box
RSM	Track surface mounting bracket


RDD



RHD



Code	Type
RDD	48Vdc Track driver
RHD	48Vdc External driver

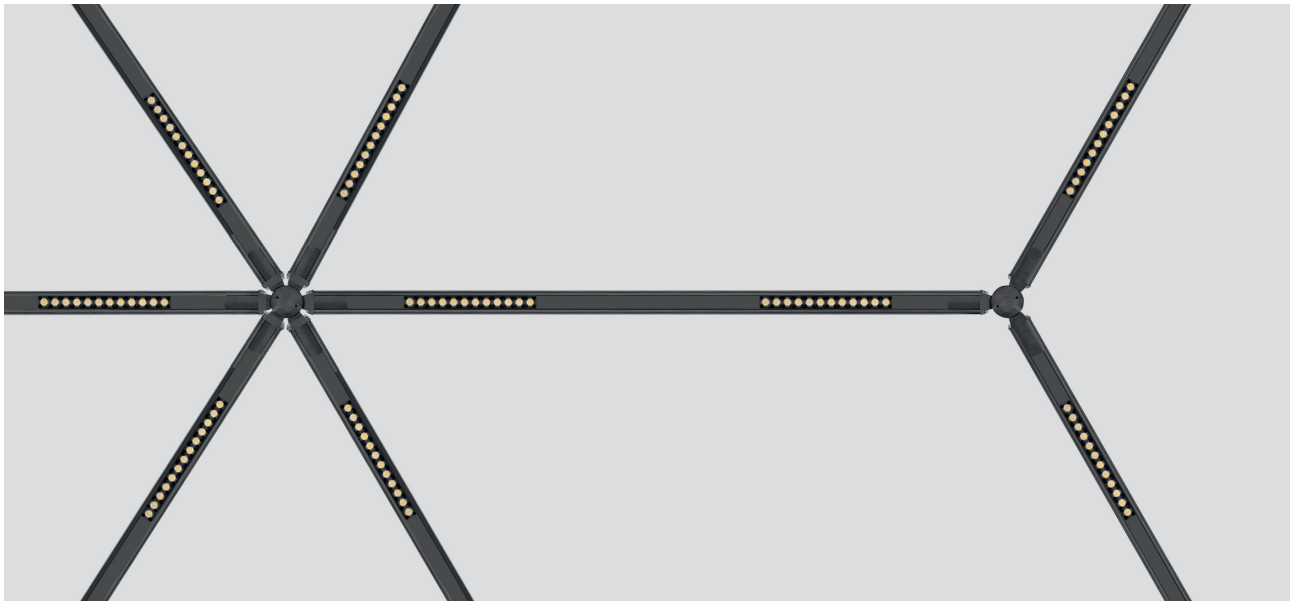

RAL COLORS

Std.

9005

FREE-ROTATING TRACK CONNECTOR

With this connector, the geometric lighting layouts you can create are limited only by your imagination. Straight lines, angular patterns, or organic shapes – all become possible!





This specially designed linking component for track lighting systems offers:

- 360° free rotation capability
- Capacity to connect up to 6 track segments simultaneously
- Seamless power transmission across all connected tracks


Technical Advantages:

- Modular design enables unlimited configuration possibilities
- Tool-free installation with secure snap-in mechanism
- Guaranteed continuous electrical conductivity

MCB



MTS



RAL COLORS

Std.

9005

ACCESSORIES

IP20 RoHS COMPLIANT CE


Code	Type
MCB	Circular socket holder
MTS	Track energy socket

Body: Aluminum **Contacts:** Copper **Finishes:** Black



ORION
Decorative Luminaires

Reflector Types



Black, White and Metallic




Opal or Prismatic Diffuser



ORION is a unique alternative for a variety of needs either as wall fixtures or as freestanding lights and can be used for general or local purposes.

The combination of elegance and sophistication harmonize to produce superb lighting, which gives Orion its special quality. The ORION series could be the best alternative for your decoration due to its aesthetic appeal.

INDEX

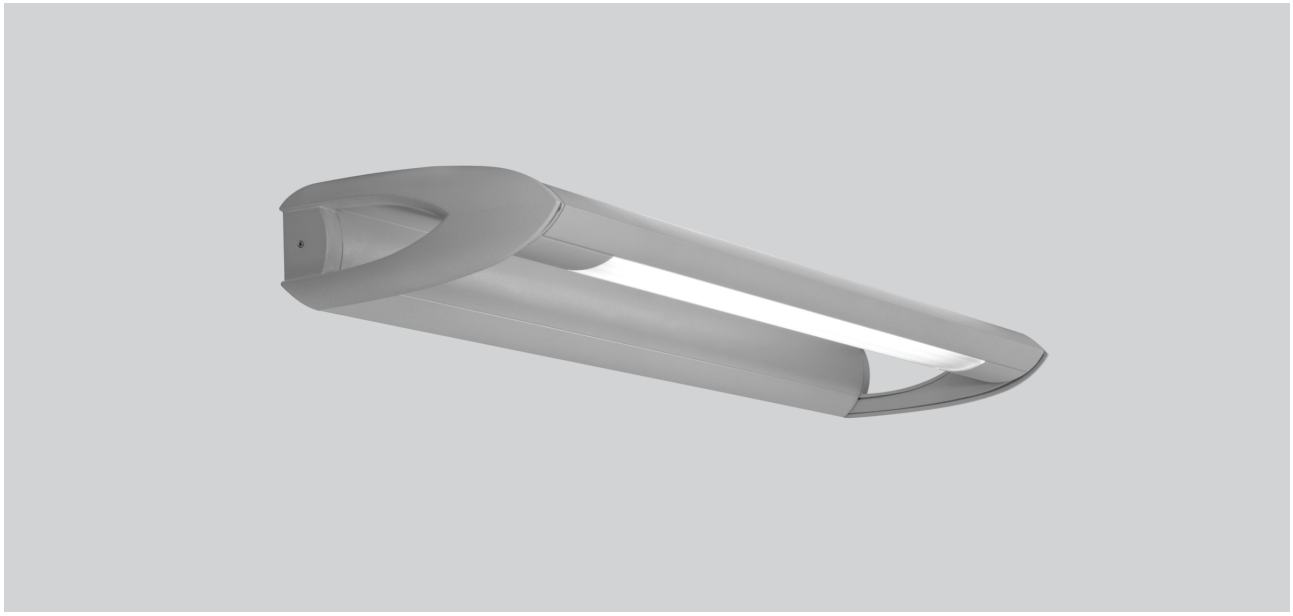

RAL COLORS

Std.
9006

Opt.
9005
9016

FPD/AP


IP20 | RoHS COMPLIANT | CE

Code	Luminous Flux	System Power	Weight
FPD/AP 118	1.400 lm	1x18 W	3.4 Kg
FPD/AP 218	2.800 lm	2x18 W	4 Kg

Body: Aluminum injection and aluminum extrusion
Driver: Included

Diffuser: Prismatic polycarbonate or opal
Voltage: 220~240 VAC


Color Temperature: 3000-4000-5000-6500K
Led: Mid-Power




BOX DIMENSIONS
22x122x10cm

BOX WEIGHT
4.3 kg

FPD/AP 118



FPD/AP 218



RAL COLORS
Std.
9006
Opt.
9005
9016



FPD-ST

IP20 | RoHS COMPLIANT | CE


Code	Beam Angle	Luminous Flux	System Power	Weight
FPD-ST	110°	3.200 lm	54 W	3.4 Kg

Body: Aluminum
Reflector: PC
Lens: PMMA

Driver: Included
Voltage Range: 220~240 VAC

Color Temperature: 2700-3000-4000-5000-6500K
Led: Mid-Power



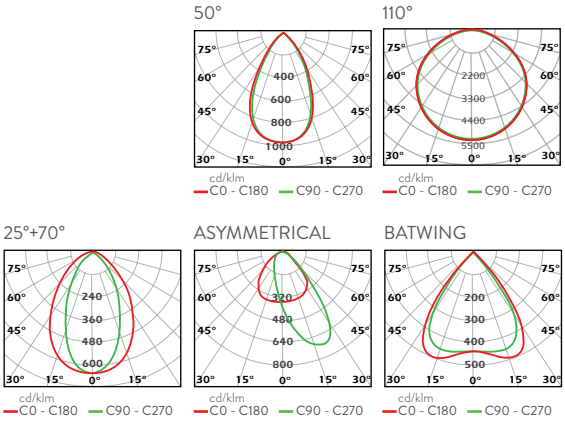

BOX DIMENSIONS
15x130x10cm

BOX WEIGHT
3.8 kg



RAL COLORS

Std.
9006

Opt.
9005
9016

FPD-LD

IP20 | RoHS COMPLIANT | CE

Code	Beam Angle	Luminous Flux	System Power	Weight
FPD/LD	110°	3.200 lm	54 W	4.7 Kg

Body: Aluminum
Base: Aluminum injection
Reflector: PC

Lens: PMMA
Voltage Range: 220~240 VAC
Driver: Included

Color Temperature: 2700-3000-4000-5000-6500K
Led: Mid-Power



BOX DIMENSIONS
15x180x10cm


BOX WEIGHT
5 kg



DOP

Decorative Luminaires

This decorative lighting fixture, which blends elegance with its circular form, brings a warm and inviting ambiance to any space. It creates a serene and cozy atmosphere with its soft, eye-friendly glow, while its indirect lighting technique adds a modern touch to your decor with mesmerizing light patterns on the ceiling. With its sleek design that complements architectural details, it is the perfect choice for those who want to create a comfortable living space. It adds sophistication and tranquility to any setting—from restaurants and hotels to offices and homes.

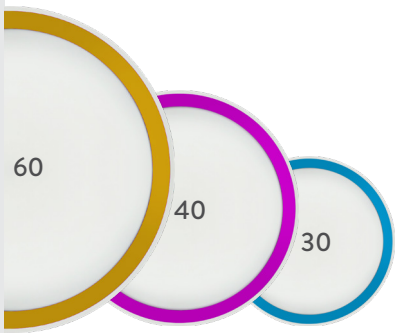

INDEX



RAL COLORS

Std.
9016

Opt.
9005
9006

DOP

IP20 | RoHS COMPLIANT | CE

Code	Luminous Flux	System Power	Weight
DOP 30	3.000 lm (front + back)	20W(front)+10W(back)	2.5 Kg
DOP 40	4.000 lm (front + back)	25W(front)+15W(back)	4 Kg
DOP 60	6.200 lm (front + back)	40W(front)+20W(back)	7.7 Kg

Body: 1.8 mm thick aluminum, inner reflector is DKP sheet.
Driver: Included

Diffuser: Opal
Voltage: 220~240VAC

Color Temperature: 2700-3000-4000-5000-6500K
Led: Mid-Power



FRONT




BACK




Code	a
DOP 30	300 mm
DOP 40	400 mm
DOP 60	600 mm

BOX DIMENSIONS
DOP30 35x35x15cm
DOP40 45x45x15cm
DOP60 65x65x15cm


BOX WEIGHT
DOP30 2.8kg
DOP40 4.3kg
DOP60 8.2kg




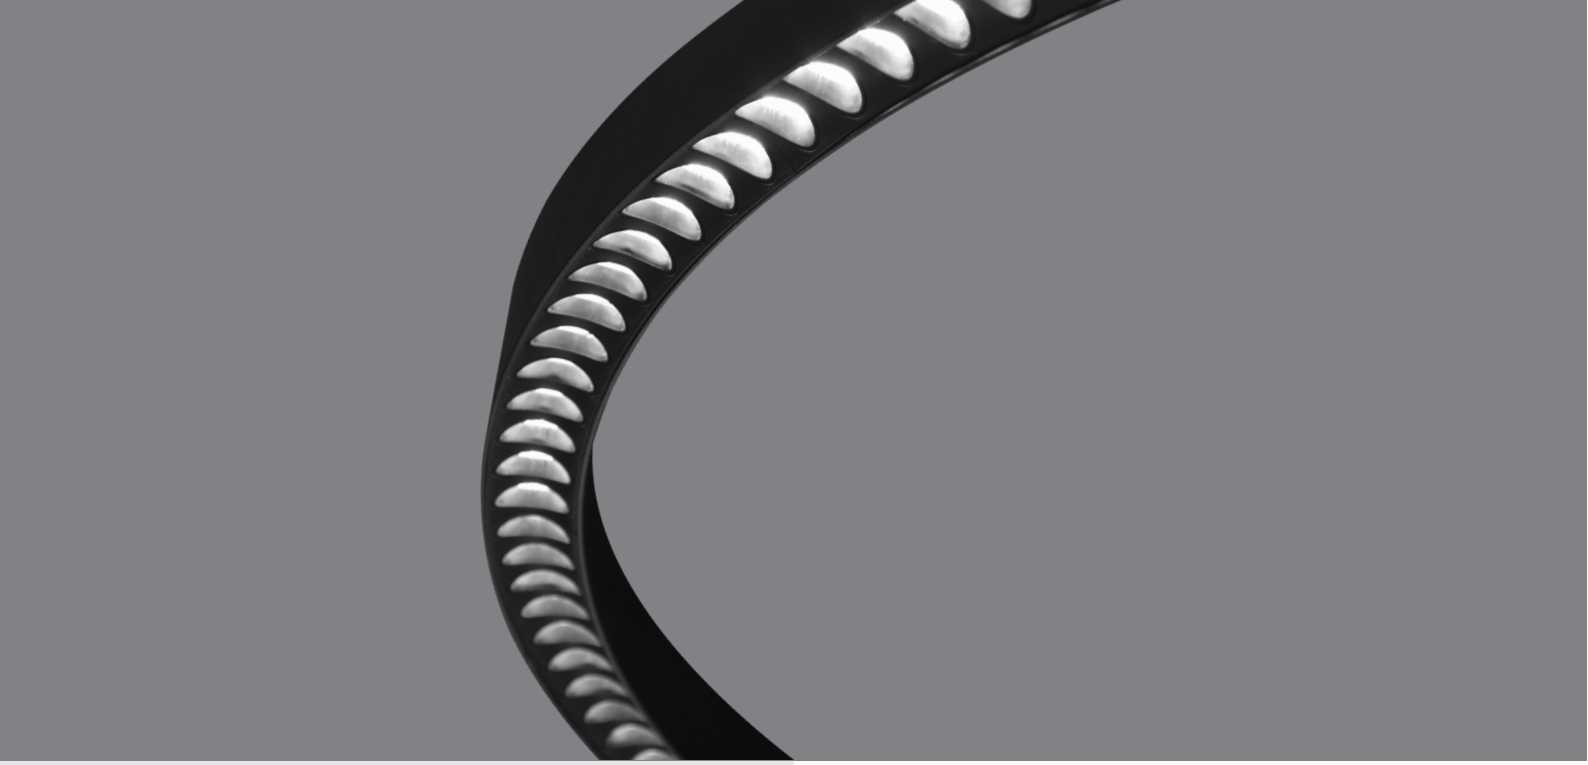


ODO

Decorative Luminaires

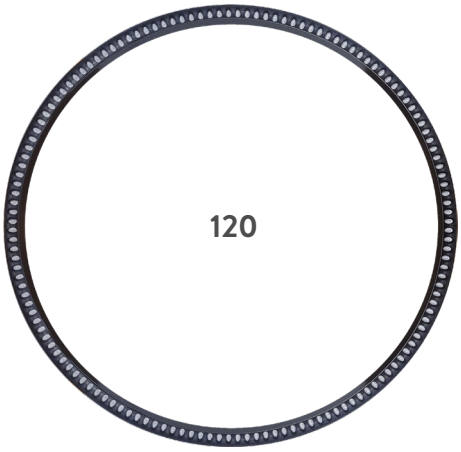


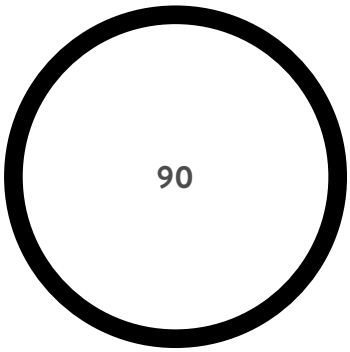



With its modern and elegant design, ODO stands out as a decorative pendant luminaire crafted in a circular form. It offers three different diameter options—120 cm, 90 cm, and 65 cm—adapting to various spatial needs. Thanks to its specially designed lenses, it distributes light evenly while minimizing glare, ensuring a comfortable lighting experience. Combining aesthetic appeal with functional design, ODO adds a sophisticated touch to both modern and classic interiors. It is an ideal choice for restaurants, hotels, lobbies, and living spaces.

INDEX

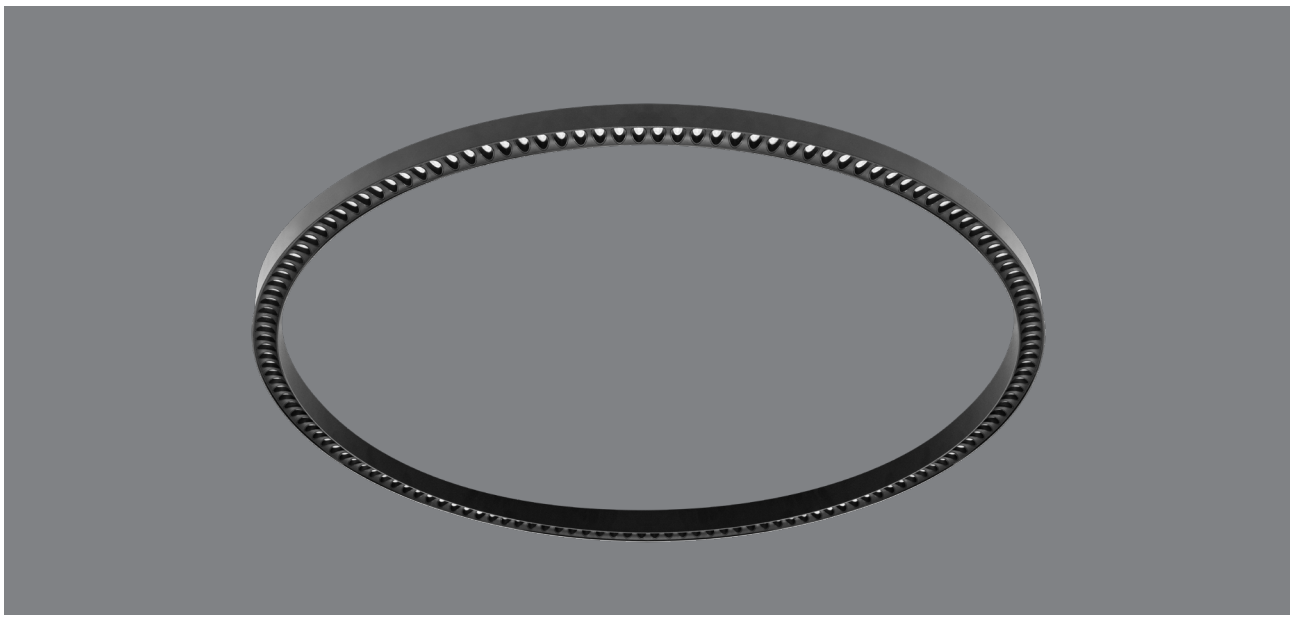

RAL COLORS
Std.
9005
Opt.
9016
9006

ODO


IP20 | RoHS COMPLIANT | CE

Code	Luminous Flux	System Power	Led
ODO 120	7.150 lm	65 W	Mid/Power
ODO 90	5.500 lm	50 W	Mid/Power
ODO 65	4.180 lm	38 W	Mid/Power


Body: 1.8 mm thick aluminum extrusion
Reflector: PC
Lens: PMMA

Color Temperature: 3000-4000-5000-6500K
Driver: Included



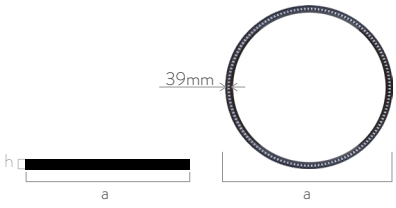

Code	a	h
ODO 120	1.200 mm	40 mm
ODO 90	900 mm	40 mm
ODO 65	650 mm	40 mm






SLO
Pendant Luminaires

SLO luminaires are very wide range of luminaires. The circular structure of the luminaire reveals a unique mood in the room. The snap-on mechanism, which can be adjusted in height, provides great convenience in installation. The array of LEDs integrates with the opal diffuser to provide extremely soft light distribution. In terms of being able to adapt to the environment, they are presented in black and white colors.



INDEX

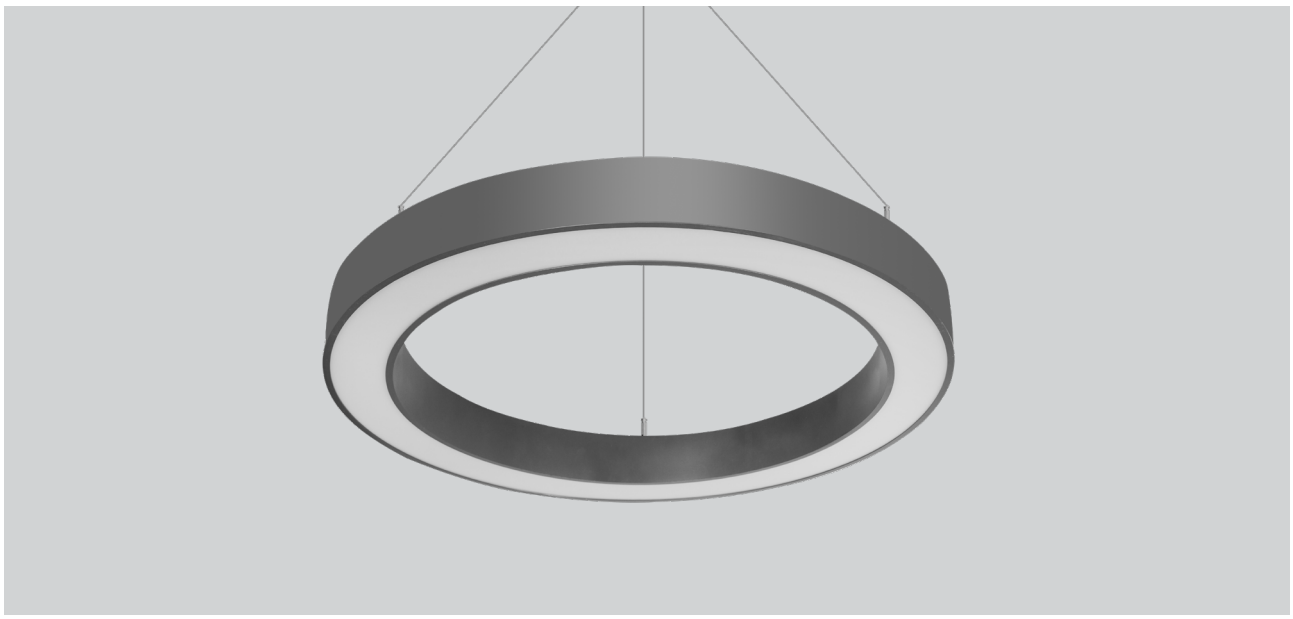

RAL COLORS

Std.
9005

Opt.
9016
9006

SLO


IP20 | RoHS COMPLIANT | CE


Code	Luminous Flux	System Power	Weight
SLO 120	4.200lm	60 W	12 Kg
SLO 90	3.100lm	45 W	9 Kg
SLO 60	2.100lm	30 W	5.5 Kg


Body: Aluminium
Diffuser: Opal
Driver: Included


Beam Angle: 115°
Voltage: 220~240 VAC

Color Temperature: 2700-3000-4000-5000-6500K
Led: Mid Power

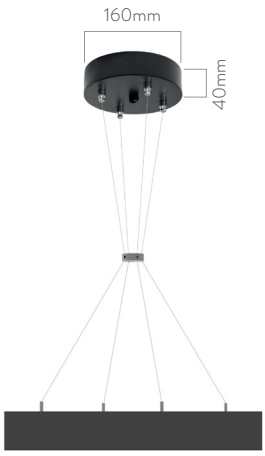




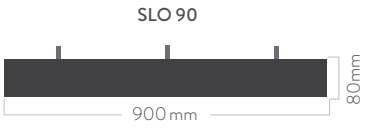




BOX DIMENSIONS
SLO60: 62x62x16 cm
SLO90: 92x92x16 cm
SLO120: 122x122x16 cm

BOX WEIGHT
SLO60: 6kg
SLO90: 9.5kg
SLO120: 12.5kg



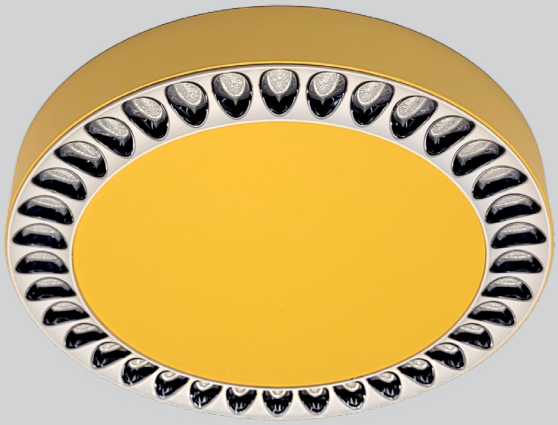


DSO

Surface-Mounted Luminaires

Meet our new generation LED fixture, where modern lighting meets aesthetics. With its circular form, it adds an energetic touch to your spaces. Its specially developed glare-controlled reflectors perfectly direct the light to provide homogeneous illumination. Combining high energy efficiency with elegance, this fixture is a stylish and functional lighting solution for your office, store, and all modern decoration projects.

INDEX

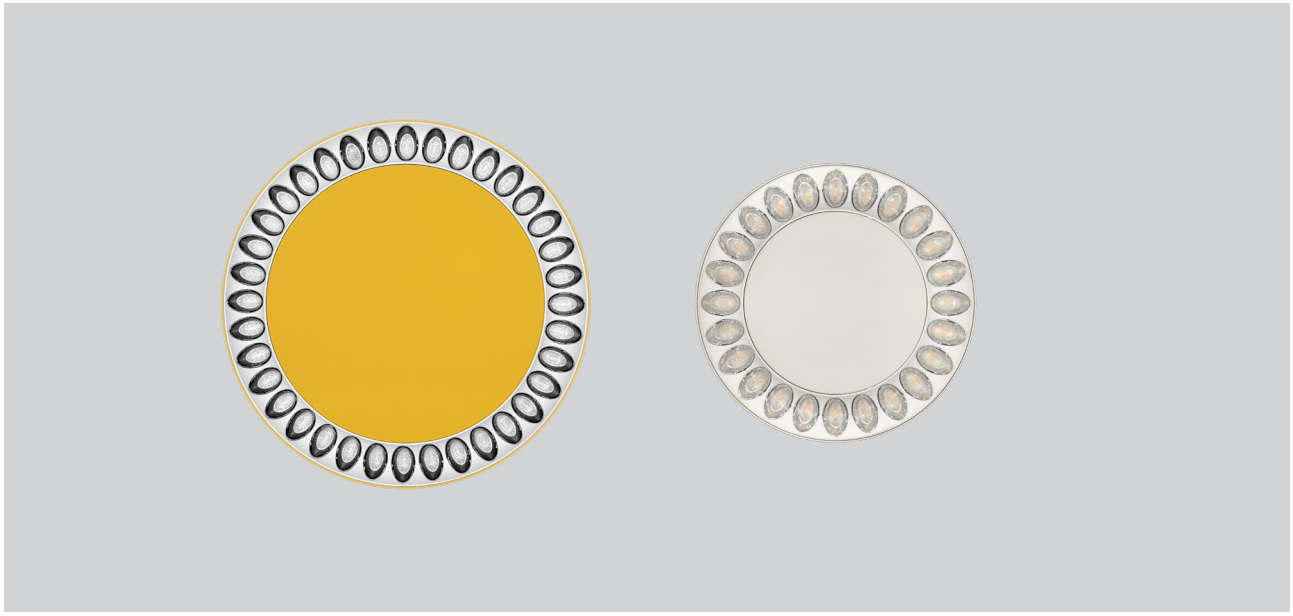

White
Yellow

DSO

IP20 | RoHS COMPLIANT | CE

Code	Luminous Flux	System Power	Weight
DSO24 (White)	2.100lm	24 W	1.1 Kg
DSO36 (Yellow)	3.050lm	36 W	1.7 Kg

Body: Aluminium
Reflector: PC

Driver: Included
Voltage: 220~240 VAC

Color Temperature: 2700-3000-4000-5000-6500K
Led: SMD






Code	a	h
DSO24	215 mm	42 mm
DSO36	305mm	42 mm


BOX DIMENSIONS
DSO24 26x26x7 cm
DSO36 35x35x7.5 cm

BOX WEIGHT
DSO24 1.2kg
DSO 36 1.8kg



DOWNLIGHTS

DOT
DOT DECO
DL45
GALAXYLED
MSG
PUNTO
SSD
LUCIFER
SFR
DNT
AGS
PULSAR
MSG/N
DYG
DML MAXI
DML MINI
LKG
PGH
RLM-D
RLM-DK

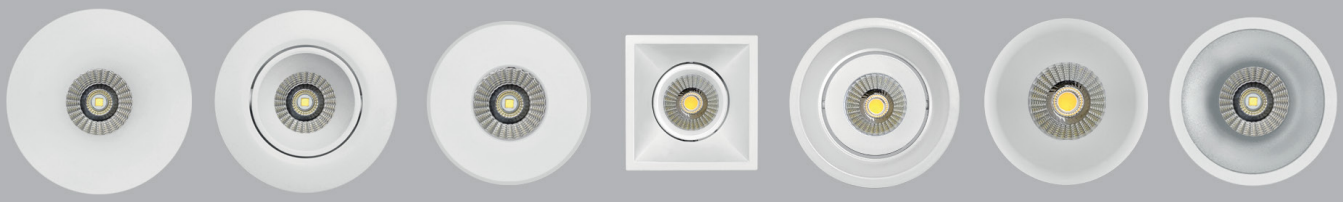

DOT
Downlight

The DOT Downlight series is designed with various frame types and three different power options. This allows the desired lighting performance, optical characteristics, and power requirements to be easily met in any indoor environment. Its highly efficient optical structure and light source ensure energy savings while guaranteeing long-lasting use. With its aesthetic design and flexible installation options, the DOT Downlight is an ideal choice for modern lighting solutions.

INDEX



RAL COLORS

Std.

9016

Opt.

9005

9006

DR-1

IP20 | RoHS COMPLIANT | CE

Code	Luminous Flux	System Power	Weight
DR1/5	600 lm	5 W	0.3 Kg
DR1/10	1.050 lm	10 W	0.3 Kg
DR1/15	1.575 lm	15 W	0.35 Kg

HCL

Frame: Aluminum Injection
Reflector: PC
Driver: Included

Beam Angle: 55°
Voltage: 220~240 VAC

Color Temperature: 2700-3000-4000-5000-6500K, TW
Led: COB

ACCESSORY



Honeycomb Louvre


h (mm)		
DR1/5	DR1/10	DR1/15
65mm	65mm	85mm




Cut-Out	∅ 90mm

BOX DIMENSIONS
30x44x15cm (6pcs)

BOX WEIGHT
2.5 kg (6pcs)



DR2

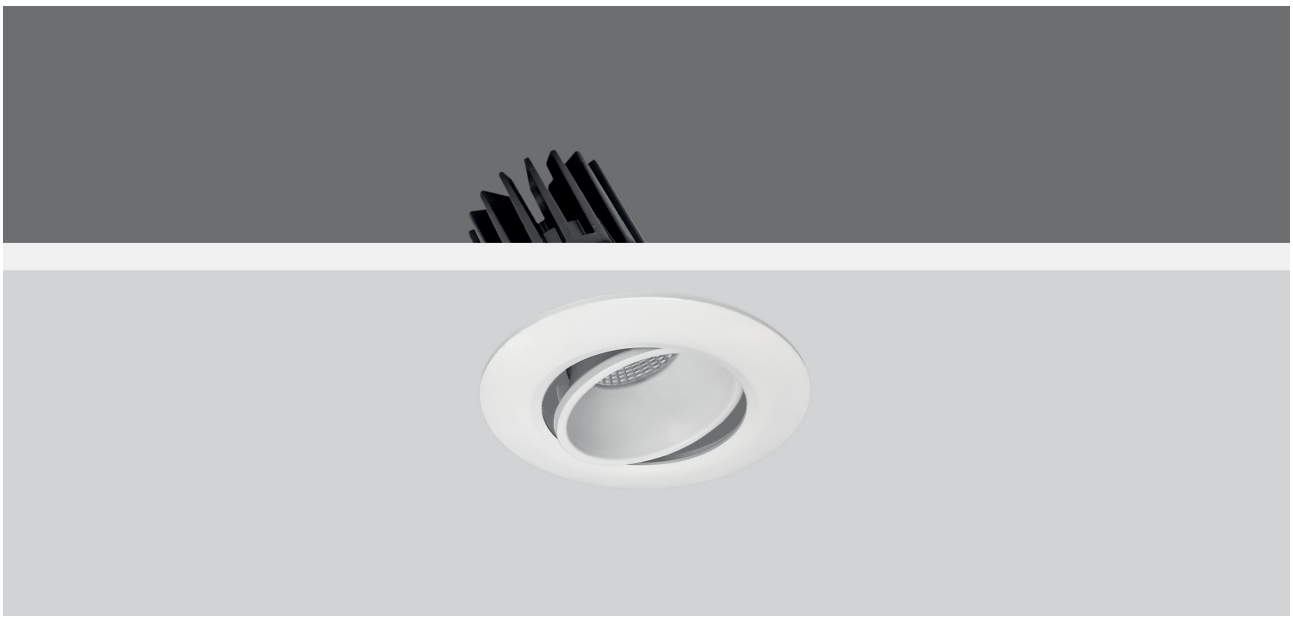

RAL COLORS

Std.
9016

Opt.
9005
9006

DR2

IP20 | RoHS COMPLIANT | CE

Code	Luminous Flux	System Power	Weight
DR2/5	580 lm	5 W	0.35 Kg
DR2/10	950 lm	10 W	0.35 Kg
DR2/15	1.500 lm	15 W	0.40 Kg

HCL

Frame: Aluminum Injection
Reflector: PC

Voltage: 220~240 VAC
Driver: Included


Color Temperature: 2700-3000-4000-5000-6500K,TW
Led: COB

ACCESSORY



Honeycomb Louvre


h (mm)		
DR2/5	DR2/10	DR2/15
72mm	72mm	92mm




Cut-Out	Ø90mm

BOX DIMENSIONS
30x44x15cm (6pcs)

BOX WEIGHT
2.5 kg (6pcs)



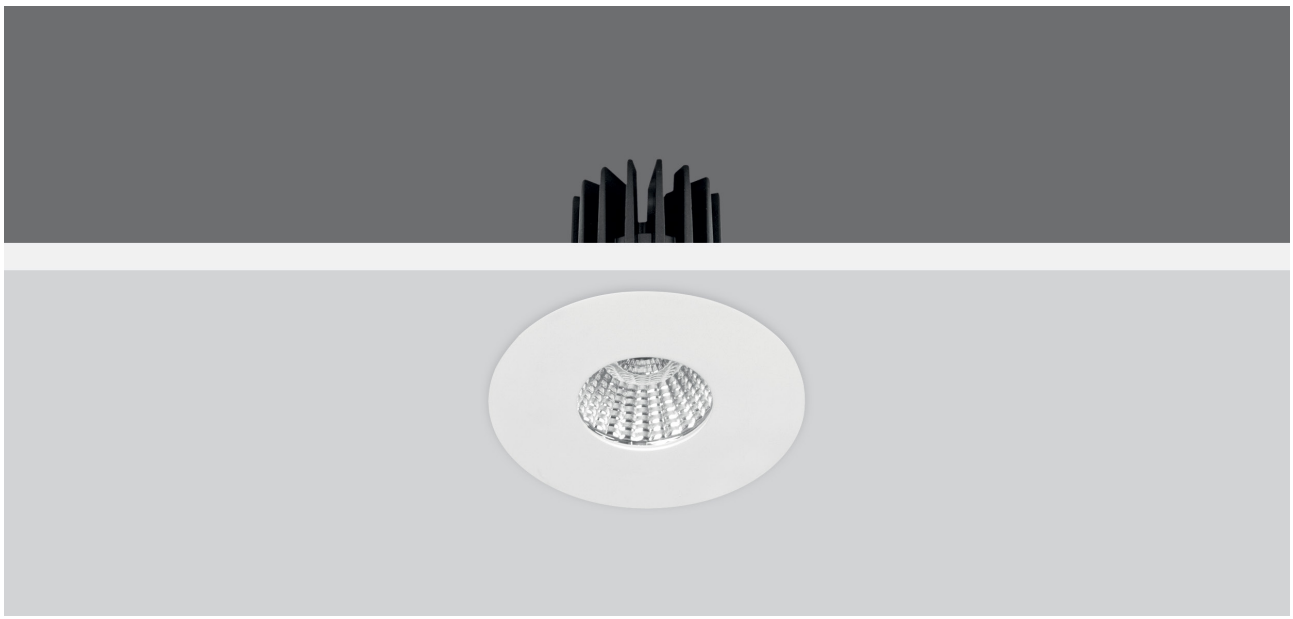

RAL COLORS

Std.
9016

Opt.
9005
9006

DR3

IP54 | RoHS COMPLIANT | CE

Code	Luminous Flux	System Power	Weight
DR3/5	570 lm	5 W	0.30 Kg
DR3/10	950 lm	10 W	0.30 Kg
DR3/15	1.500 lm	15 W	0.25 Kg

Frame: Aluminum Injection
Reflector: PC

Voltage: 220~240 VAC
Driver: Included


Color Temperature: 2700-3000-4000-5000-6500K
Led: COB

ACCESSORY



Honeycomb Louvre


h (mm)		
DR3/5	DR3/10	DR3/15
68mm	68mm	88mm



Cut-Out	Ø 73mm

BOX DIMENSIONS
30x44x15cm (6pcs)

BOX WEIGHT
2 kg (6pcs)





RAL COLORS

Std.
9016

Opt.
9005
9006

DR4

IP20 | RoHS COMPLIANT | CE

Code	Luminous Flux	System Power	Weight
DR4/5	600 lm	5 W	0.45 Kg
DR4/10	1.030 lm	10 W	0.45 Kg
DR4/15	1.510 lm	15 W	0.5 Kg

HCL

Frame: Aluminum Injection
Reflector: PC

Voltage: 220~240 VAC
Driver: Included


Color Temperature: 2700-3000-4000-5000-6500K, TW
Led: COB

ACCESSORY



Honeycomb Louvre


h (mm)		
DR4/5	DR4/10	DR4/15
70mm	70mm	90mm



Cut-Out	□80x80mm

BOX DIMENSIONS
30x44x15cm (6pcs)

BOX WEIGHT
3 kg (6pcs)





RAL COLORS

Std.

9016

Opt.

9005

9006

DR5

IP20 | RoHS COMPLIANT | CE

Code	Luminous Flux	System Power	Weight
DR5/5	630 lm	5 W	0.40 Kg
DR5/10	1.050 lm	10 W	0.40 Kg
DR5/15	1550 lm	15 W	0.45 Kg

HCL

Frame: Aluminum Injection
Reflector: PC


Voltage: 220~240 VAC
Driver: Included

Color Temperature: 2700-3000-4000-5000-6500K, TW
Led: COB

Trimless(Optional)



h (mm)		
DR5/5	DR5/10	DR5/15
72mm	72mm	92mm



Cut-Out	∅ 90mm


ACCESSORY



Honeycomb
Louvre

BOX DIMENSIONS
30x44x15cm (6pcs)

BOX WEIGHT
2.7 kg (6pcs)



DR6

DOWNLIGHT



RAL COLORS

Std.
9016

Opt.
9005
9006

DR6

IP20 | RoHS COMPLIANT | CE

Code	Luminous Flux	System Power	Weight
DR6/5	570 lm	5 W	0.2 Kg
DR6/10	1.020 lm	10 W	0.2 Kg
DR6/15	1.515 lm	15 W	0.25 Kg

HCL

Frame: Aluminum Injection
Reflector: PC

Voltage: 220~240 VAC
Driver: Included


Color Temperature: 2700-3000-4000-5000-6500K, TW
Led: COB

ACCESSORY



Honeycomb Louvre


h (mm)		
DR6/5	DR6/10	DR6/15
78mm	78mm	98mm




Cut-Out	Ø 72mm

BOX DIMENSIONS
30x44x15cm (6pcs)

BOX WEIGHT
2 kg (6pcs)



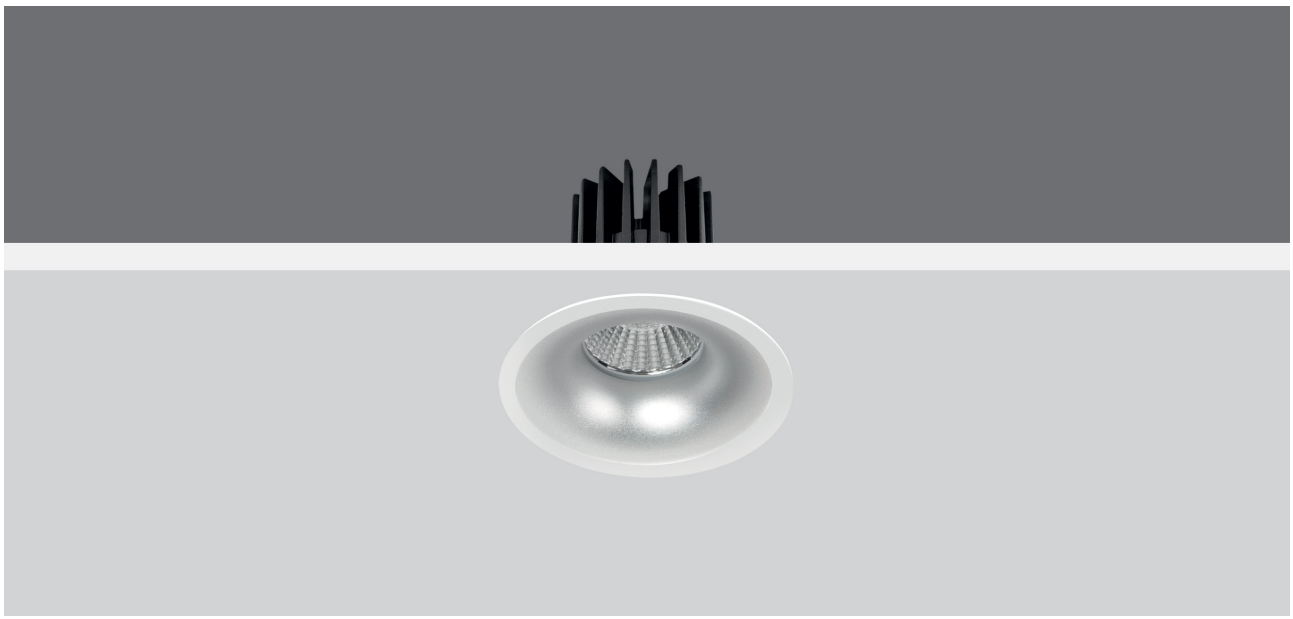

RAL COLORS

Std.

9016

Opt.

9005

9006

DR7

IP20 | RoHS COMPLIANT | CE

Code	Luminous Flux	System Power	Weight
DR7/5	560 lm	5 W	0.40 Kg
DR7/10	1.010 lm	10 W	0.40 Kg
DR7/15	1.505 lm	15 W	0.45 Kg

HCL

Frame: Aluminum Injection
Reflector: PC

Voltage: 220~240 VAC
Driver: Included


Color Temperature: 2700-3000-4000-5000-6500K, TW
Led: COB

ACCESSORY



Honeycomb Louvre


h (mm)		
DR7/5	DR7/10	DR7/15
75mm	75mm	95mm



Cut-Out	Ø 90mm

BOX DIMENSIONS
30x44x15cm (6pcs)

BOX WEIGHT
2.7 kg (6pcs)





DOT DECO

Downlight

Add a modern and colorful touch to your spaces with our innovative downlight fixtures. These products, which offer four different vibrant color options including red, blue, green, and yellow, combine aesthetics and functionality. Their transparent and shiny outer surfaces add a stylish dynamism to interior lighting, while the energy-efficient LED light source provides both eye-catching illumination and savings. Thanks to easy installation, you can create the atmosphere you desire in your home, office, or commercial spaces. These fixtures are a perfect choice for those who want to use lighting as a design element.

INDEX



DOT DC


IP20 | RoHS COMPLIANT | CE

Code	Luminous Flux	System Power	Weight
DOT DC/R (Red)	905 lm	10 W	0.3 Kg
DOT DC/G (Green)	905 lm	10 W	0.3 Kg
DOT DC/B (Blue)	905 lm	10 W	0.3 Kg
DOT DC/Y (Yellow)	905 lm	10 W	0.3 Kg
■ 5 - 15 watt options are also available			

Body: Aluminum Injection
Driver: Included
Reflector: PC

Frame: ABS
Beam Angle: 48°
Voltage: 220~240 VAC


Color Temperature: 2700-3000-4000-5000-6500K
Led: COB



Cut-Out	Ø74mm

BOX DIMENSIONS
30x44x15cm (6pcs)

BOX WEIGHT
2 kg (6pcs)





RAL COLORS

Std.
9016

Opt.
9005
9006

DOT DO

IP20 | RoHS COMPLIANT | CE

Code	Luminous Flux	System Power	Weight
DOT DO	310 lm	10 W	0.45Kg

■ 5 - 15 W options are also available

Body: Aluminum Injection
Diffuser: Prismatic glass
Driver: Included

Beam Angle: Symmetrical
Voltage: 220~240 VAC


Color Temperature: 2700-3000-4000-5000-6500K
Led: COB



Cut-Out	Ø72mm

BOX DIMENSIONS
30x44x15cm (6pcs)

BOX WEIGHT
3 kg (6pcs)






The decorative-style products can be easily mounted thanks to their spring-loaded mounting brackets.

You can create the desired decorative effect in homes, offices, and many other areas with the same or different color groups.

INDEX

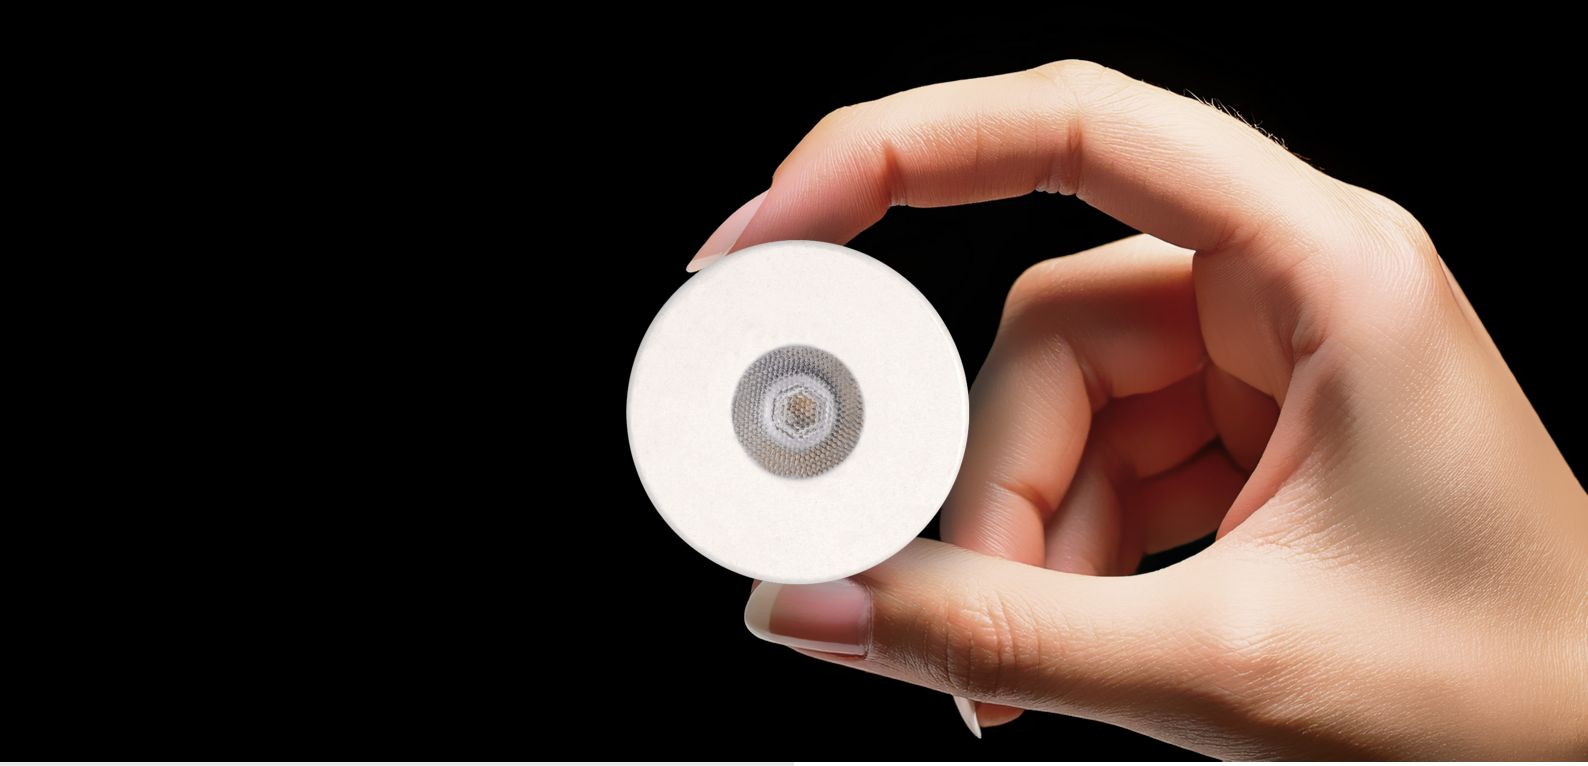

DL 45
Downlight

Small, decorative, and effective. DL 45 is your mini-helper in areas where emphasis is desired. They can be produced at any angle from 10 degrees to 90 degrees.It is a recessed mini-spotlight that you can achieve perfect results with to enrich spaces and highlight certain objects with small touches.

INDEX



RAL COLORS

Std.
9016

Opt.
9005
9006

DL 45

IP20 | RoHS COMPLIANT | CE


CODE	Beam Angle	Luminous Flux	System Power	Voltage Range	Weight
DL 45	24°	170 lm	2 W	220~240 VAC	0.1 Kg

Body: Aluminum
Reflector: PMMA
Lens: Prismatic

Driver: Included
Voltage: 220~240 VAC

Color Temperature: 2700-3000-4000-5000-6500K
Led: Power






Cut-Out	Ø33mm

BOX DIMENSIONS
30x44x15cm (6pcs)

BOX WEIGHT
1 kg(6pcs)





GALAXY LED
Downlight

GALAXYLED fixtures are suitable for use in many areas such as particularly hotels, restaurants, plazas, shopping malls and stores. COB LEDs furnish extremely good fixture efficiency and stable operation by virtue of high-efficient reflectors and coolers manufactured from aluminum material with high-grade heat transfer.

They lower the amount of visual pollution to minimum levels and help you to achieve the desired lighting levels.They are suitable for effects and decorative lighting with different optical and power options.



INDEX



RAL COLORS

Std.

9016

Opt.

9005

9006

DL2010/S

IP20 | RoHS COMPLIANT | CE

Code	Luminous Flux	System Power	Weight
DL2010/S/5	450 lm	5 W	0.5 Kg
DL2010/S/10	900 lm	10 W	0.5 Kg
DL2010/S/15	1350 lm	15 W	0.5 Kg

Body: Aluminum Injection Frame
Reflector: Aluminum
Cooler: Aluminum injection

Beam Angle: Symmetrical
Voltage: 220~240 VAC
Driver: Included

Color Temperature: 2700-3000-4000-5000-6500K
Led: COB






Cut-Out	Ø95mm

BOX DIMENSIONS
11x11x10 cm

BOX WEIGHT
0.7 kg





RAL COLORS

Std.
9016

Opt.
9005
9006

DL2010/AS

IP20 | RoHS COMPLIANT | CE

Code	Luminous Flux	System Power	Weight
DL2010/AS/5	400 lm	5 W	0.5 Kg
DL2010/AS/10	800 lm	10 W	0.5 Kg
DL2010/AS/15	1.200 lm	15 W	0.5 Kg

Body: Aluminum Injection Frame
Reflector: Aluminum
Cooler: Aluminum injection

Beam Angle: Asymmetrical
Voltage: 220~240 VAC
Driver: Included

Color Temperature: 2700-3000-4000-5000-6500K
Led: COB






Cut-Out	∅95mm

BOX DIMENSIONS
11x11x10 cm

BOX WEIGHT
0.7 kg





RAL COLORS

Std.

9016

Opt.

9005

9006

DL2006

IP20 | RoHS COMPLIANT | CE

Code	Luminous Flux	System Power	Weight
DL2006/5	510 lm	5 W	0.6 Kg
DL2006/10	1.030 lm	10 W	0.6 Kg
DL2006/15	1.530 lm	15 W	0.6 Kg

Body: Aluminum Injection Frame
Reflector: Aluminum
Cooler: Aluminum injection

Beam Angle: 55°
Voltage: 220~240 VAC
Driver: Included

Color Temperature: 2700-3000-4000-5000-6500K
Led: COB






Cut-Out	Ø95mm

BOX DIMENSIONS
11x11x10 cm

BOX WEIGHT
0.8 kg





MSG
Downlight

MSG downlight products have a wide variety of model structures. Downlight fixtures that appeal to wide usage areas can meet the needs of all kinds of places. While competing in elegance with decorative glass types, they create pleasant light effects on ceilings.

MSG luminaires offer common usage patterns thanks to their high efficiency and product types with different diameters. Materials and electronic components used with aluminum injection body and cooler structures maximize the life of the luminaires.

INDEX

FRAMES

Type I (Standard)



Type I




Type II (Optional)



DIFFUSER

		MSG 160			MSG 200		
		14W	20W	27W	14W	20W	27W
Opal	MSG/O	●	●	●	●	●	●
WP	MSG/WP	●	●	●	●	●	●
Prismatic Glass	MSG/B					●	●
Decorative Glass	MSG/DC	●	●	●			
Frosted Transparent Center Edge	MSG/SC				●	●	●

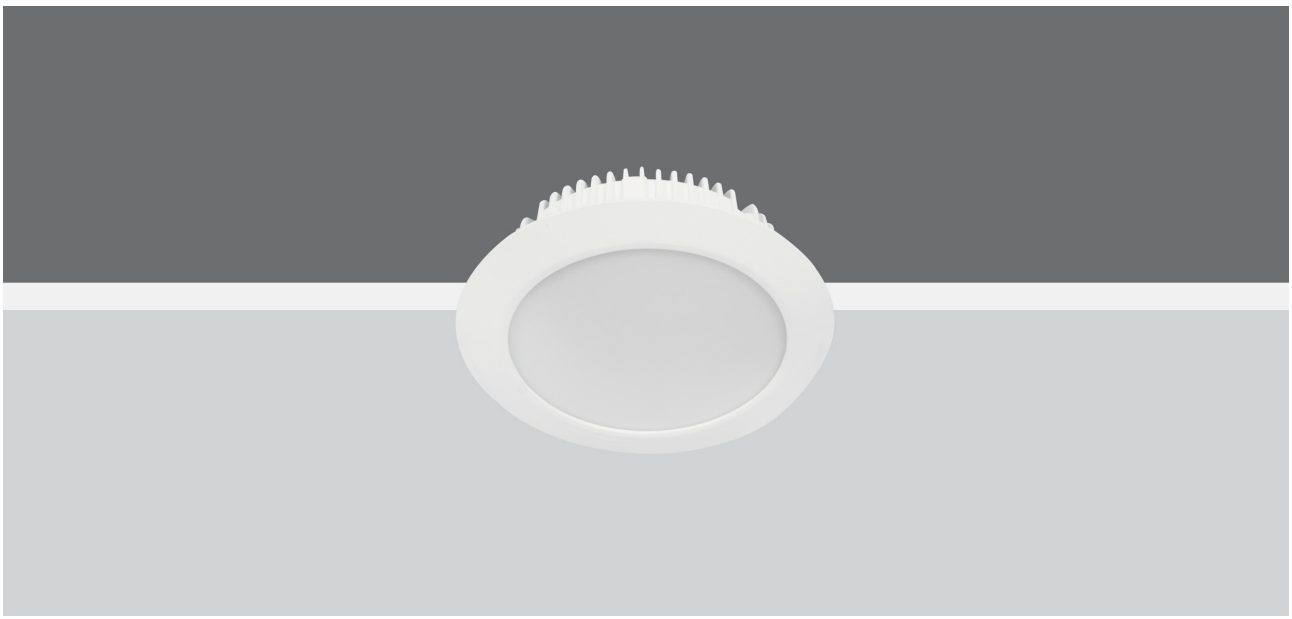

RAL COLORS

Std.
9016

Opt.
9005
9006

MSG/O


IP20 | RoHS COMPLIANT | CE

Code	Luminous Flux	System Power	Weight
MSG 160/O 14	1.300 lm	14 W	0.85 Kg
MSG 160/O 20	1.900 lm	20 W	0.85 Kg
MSG 160/O 27	2.565 lm	27 W	0.85 Kg
MSG 200/O 14	1.360 lm	14 W	1 Kg
MSG 200/O 20	1.950 lm	20 W	1 Kg
MSG 200/O 27	2.600 lm	27 W	1 Kg

Body: Aluminum Injection
Driver: Included
Diffuser: PMMA Opal

Beam Angle: 113°
Voltage: 220~240 VAC


Color Temperature: 2700-3000-4000-5000-6500K
Led: Mid Power

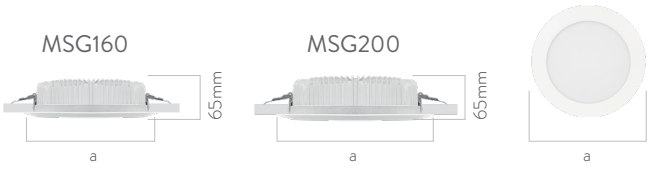


Code	a	Cut-Out
MSG160/O	Ø202 mm	Ø178 mm
MSG200/O	Ø235 mm	Ø206 mm

BOX DIMENSIONS
MSG 160 25x25x12 cm
MSG 200 28.5x28x12 cm

BOX WEIGHT
MSG 160 1.1 kg
MSG 200 1.3 kg



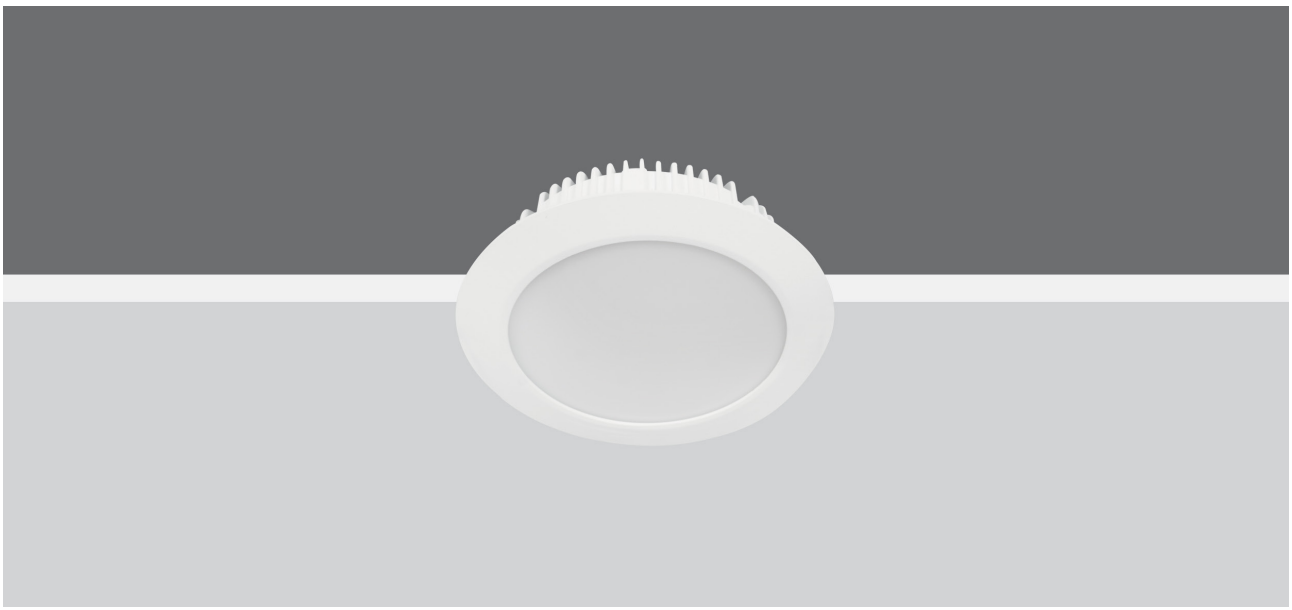

RAL COLORS
Std.
9016
Opt.
9005
9006

MSG/WP

IP54 | RoHS COMPLIANT | CE

Code	Luminous Flux	System Power	Weight
MSG 160/WP 14	1.300 lm	14 W	0.85 Kg
MSG 160/WP 20	1.900 lm	20 W	0.85 Kg
MSG 160/WP 27	2.565 lm	27 W	0.85 Kg
MSG 200/WP 14	1.360 lm	14 W	1 Kg
MSG 200/WP 20	1.950 lm	20 W	1 Kg
MSG 200/WP 27	2.600 lm	27 W	1 Kg

Body: Aluminum Injection
Driver: Included
Diffuser: PMMA Opal

Beam Angle: 113°
Voltage: 220~240 VAC

Color Temperature: 2700-3000-4000-5000-6500K
Led: Mid Power



IP Driver Case

MSG160



MSG200






Code	a	Cut-Out
MSG160/WP	Ø202 mm	Ø178 mm
MSG200/WP	Ø235 mm	Ø206 mm

BOX DIMENSIONS
MSG 160 25x25x12 cm
MSG 200 28.5x28x12 cm

BOX WEIGHT
MSG 160 1.1 kg
MSG 200 1.3 kg





RAL COLORS

Std.
9016

Opt.
9005
9006

MSG/B


IP20 | RoHS COMPLIANT | CE

Code	Luminous Flux	System Power	Weight
MSG 200/B 20	1.700 lm	20 W	1 Kg
MSG 200/B 27	2.400 lm	27 W	1 Kg

Body: Aluminum Injection
Driver: Included
Diffuser: Prismatic Glass

Beam Angle: 100°
Voltage: 220~240 VAC


Color Temperature: 2700-3000-4000-5000-6500K
Led: Mid Power

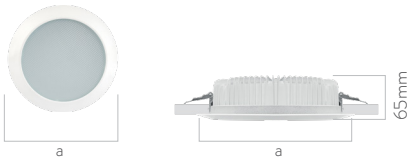

Code	a	Cut-Out
MSG200/B	Ø235mm	Ø206mm

BOX DIMENSIONS
285x280x120 mm

BOX WEIGHT
1.3kg





70
rendy

RAL COLORS

Std.
9016

Opt.
9005
9006

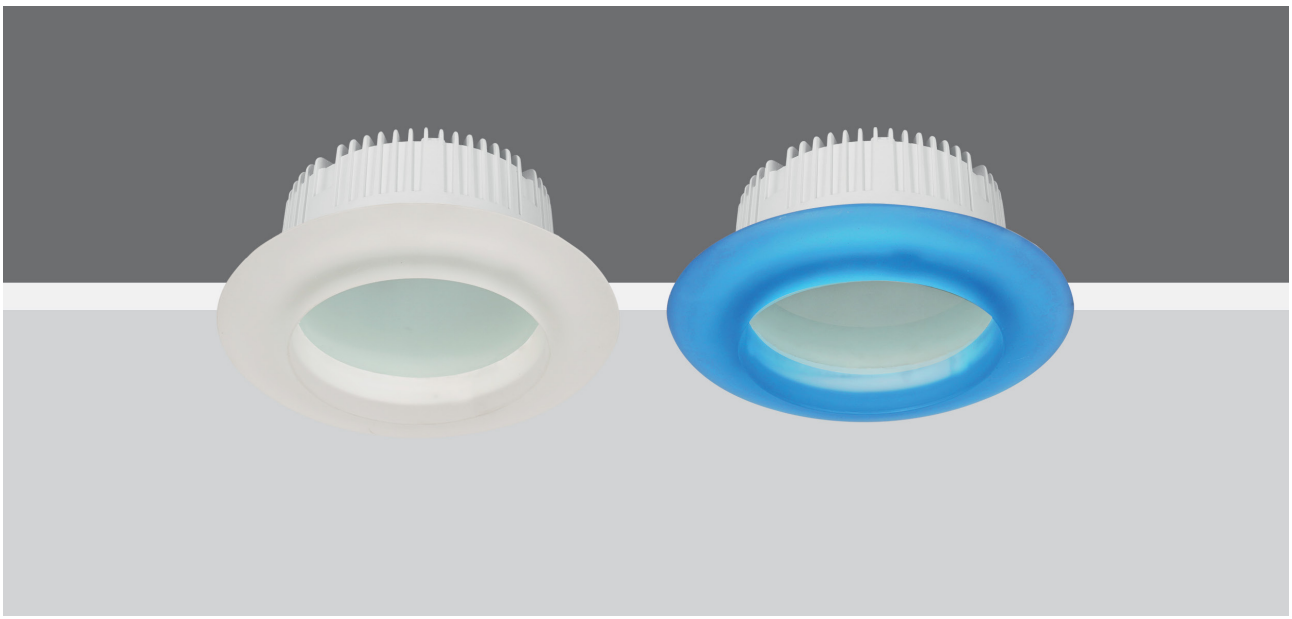

MSG/DC


IP20 | RoHS COMPLIANT | CE

Code	Luminous Flux	System Power	Weight
MSG 160/DC/B 14	710 lm	14 W	1.75 Kg
MSG 160/DC/B 20	1.100 lm	20 W	1.75 Kg
MSG 160/DC/B 27	1.650 lm	27 W	1.75 Kg
MSG 160/DC/W 14	990 lm	14 W	1.75 Kg
MSG 160/DC/W 20	1.170 lm	20 W	1.75 Kg
MSG 160/DC/W 27	1.690 lm	27 W	1.75 Kg

Body: Aluminum Injection
Driver: Included
Front Glass: Special die-cast glass for decorative purpose. Ring shape combined with flat inner glass

Beam Angle: 75°
Voltage: 220~240 VAC

Color Temperature: 2700-3000-4000-5000-6500K
Led: Mid Power




a




Code	a	Cut-Out
MSG160/DC	Ø220 mm	Ø178 mm

BOX DIMENSIONS
25x25x12 cm

BOX WEIGHT
2.3kg



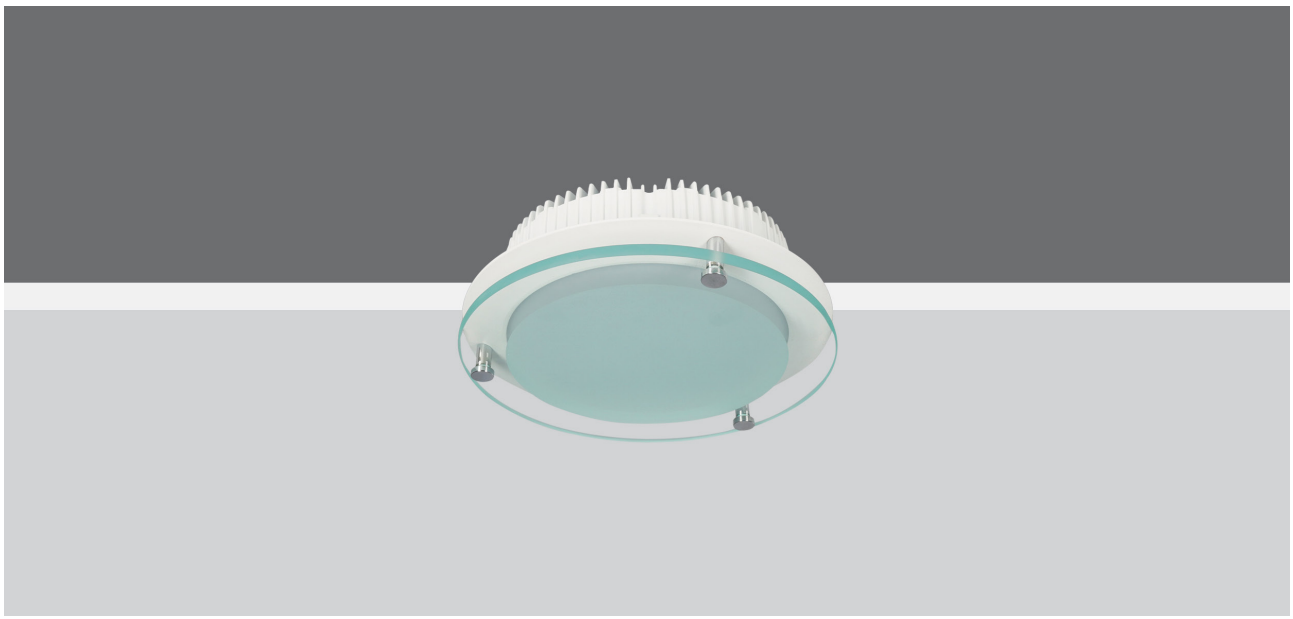

RAL COLORS
Std.
9016
Opt.
9005
9006

MSG/SC

IP20 | RoHS COMPLIANT | CE

Code	Luminous Flux	System Power	Weight
MSG 200/SC4 20	1.310 lm	20 W	1.5 Kg
MSG 200/SC4 27	1.800 lm	27 W	1.5 Kg
MSG 200/SC2 20	1.100 lm	20 W	1.8 Kg
MSG 200/SC2 27	1.550lm	27 W	1.8 Kg

Body: Aluminum Injection
Driver: Included
Front Glass: 8mm thick tempered Glass

Beam Angle: 90°
Voltage: 220~240 VAC

Color Temperature: 2700-3000-4000-5000-6500K
Led: Mid-Power



a



Code	a	Cut-Out
MSG200/SC	Ø235 mm	Ø206 mm

BOX DIMENSIONS
SC2 28x28x12 cm
SC4 28x28x12 cm

BOX WEIGHT
SC2 2.3 kg
SC4 2 kg





PUNTO
Downlight

The high-permeability opal diffuser transfers light to the environment in a soft way. High lighting efficiency and a clear appearance are achieved thanks to the Furukawa reflectors used on the inner surface of the fixture. Affordability, efficiency, and slimness are the three words that best describe the Punto Series downlights.

INDEX



RAL COLORS

Std.

9016

Opt.

9005

9006

SSL200

IP20 | RoHS COMPLIANT | CE

Code	Beam Angle	Luminous Flux	System Power	Weight
SSL 200/14	112°	1.420 lm	14 W	0.45 Kg
SSL 200/20	112°	2.030 lm	20 W	0.45 Kg

Body: DKP sheet metal
Diffuser: Opal

Driver: Included
Voltage: 220~240 VAC


Color Temperature: 2700-3000-4000-5000-6500K
Led: Mid-Power




Code	Cut-Out
SSL200	∅205 mm

BOX DIMENSIONS
25x25x7 cm

BOX WEIGHT
0.85 Kg



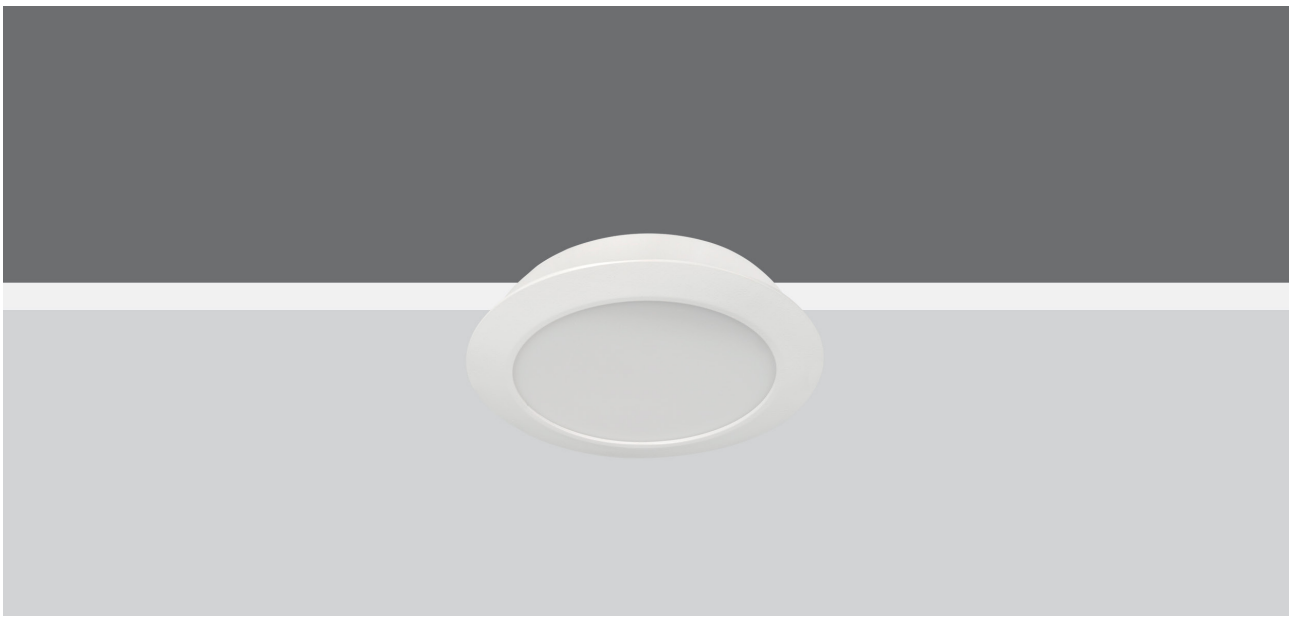

RAL COLORS
Std.
9016
Opt.
9005
9006

SSL160

IP20 | RoHS COMPLIANT | CE

Code	Beam Angle	Luminous Flux	System Power	Weight
SSL 160/14	112°	1.420 lm	14 W	0.40 Kg
SSL 160/20	112°	2.070 lm	20 W	0.40 Kg

Body: DKP sheet metal
Diffuser: Opal
Driver: Included
Voltage: 220~240 VAC
Color Temperature: 2700-3000-4000-5000-6500K
Led: Mid Power

ACCESSORY




Honeycomb Louvre




Code	Cut-Out
SSL160	Ø178 mm

BOX DIMENSIONS
22x22x7 cm

BOX WEIGHT
0.85 Kg



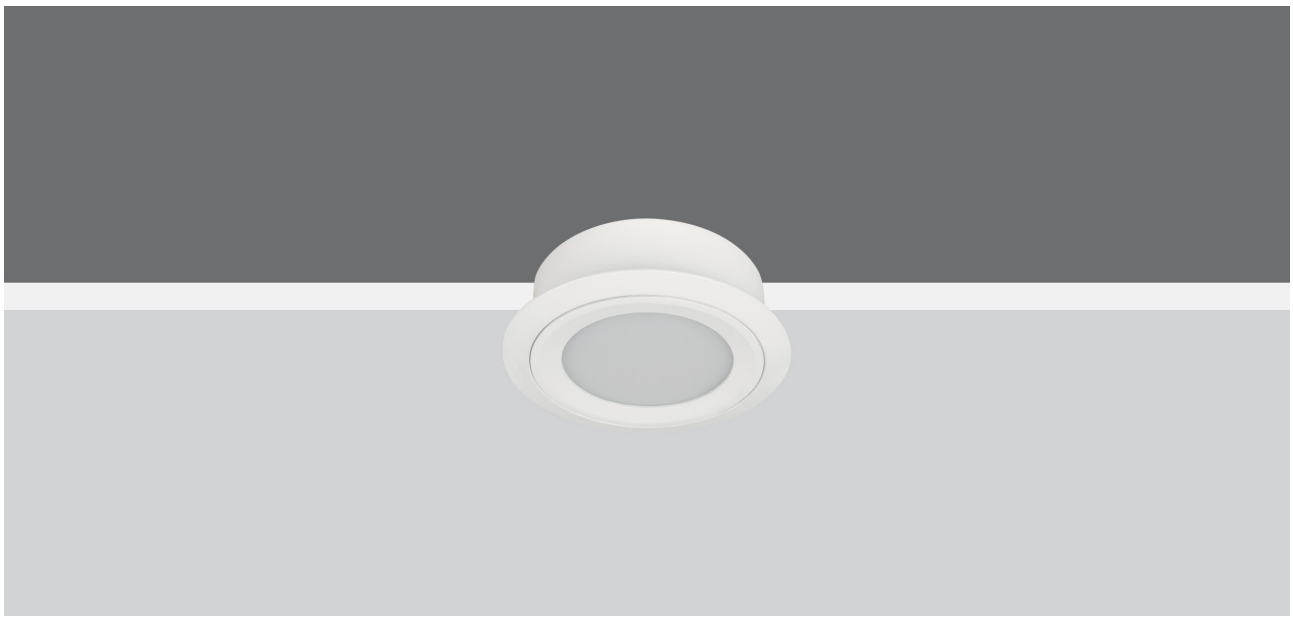

RAL COLORS

Std.

9016

Opt.

9005

9006

SSL104

IP20 | RoHS COMPLIANT | CE

Code	Beam Angle	Luminous Flux	System Power	Weight
SSL 104/9	112°	920 lm	9 W	0.25 Kg
SSL 104/13	112°	1.330 lm	13 W	0.25 Kg

Body: DKP sheet metal
Diffuser: Opal

Driver: Included
Voltage: 220~240 VAC


Color Temperature: 2700-3000-4000-5000-6500K
Led: Mid Power



Code	Cut-Out
SSL104	Ø125 mm

BOX DIMENSIONS
15x15x7 cm

BOX WEIGHT
0.65 Kg





SSD
Downlight

Litpa SSD spots are developed for downlight applications where light control is desired. The light source is recessed while the aluminum reflectors in front of the fixture minimize direct and indirect glare that may occur in the fixture.This increases fixture efficiency and concentrates the light in the usage area. Special reflectors are available for dark light applications.

INDEX



RAL COLORS
Std.
9016
Opt.
9005
9006

SSD160


IP20 | RoHS COMPLIANT | CE

Code	Luminous Flux	System Power	Weight
SSD 160/13	1.305 lm	13 W	0.6 Kg
SSD 160/18	1.820 lm	18 W	0.6 Kg

Body: Aluminum Injection
Diffuser: Opal
Reflector: Aluminum

Beam Angle: 102°
Voltage: 220~240 VAC
Driver: Included

Color Temperature: 2700-3000-4000-5000-6500K
Led: Mid-Power

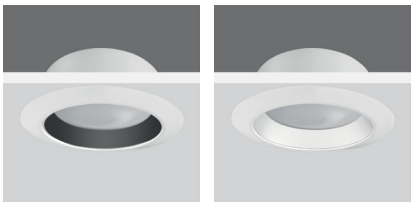

Optional (Black and White Reflector)

ACCESSORY



Honeycomb Louvre






Code	Cut-Out
SSD160	Ø178 mm

BOX DIMENSIONS
22x22x7 cm

BOX WEIGHT
1 kg



SSD

DOWNLIGHT



RAL COLORS

Std.
9016

Opt.
9005
9006

SSD200


IP20 | RoHS COMPLIANT | CE

Code	Luminous Flux	System Power	Weight
SSD 200/14	1.415lm	14 W	0.75 Kg
SSD 200/20	2.050 lm	20 W	0.75 Kg

Body: The frame is made of aluminum
Diffuser: Opal
Reflector: Aluminum

Beam Angle: 102°
Voltage: 220~240 VAC
Driver: Included

Color Temperature: 3000-4000-5000-6500K
Led: Mid-Power

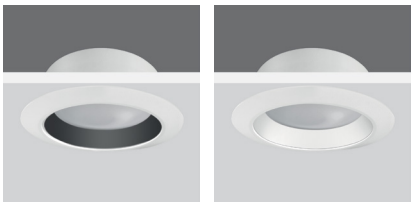

Optional (Black and White Reflector)

ACCESSORY



Honeycomb Louvre






Code	Cut-Out
SSD200	Ø206 mm

BOX DIMENSIONS
29x28x12 cm

BOX WEIGHT
1.2 kg





RAL COLORS
Std.
9016
Opt.
9005
9006

SSD203


IP20 | RoHS COMPLIANT | CE

Code	Luminous Flux	System Power	Weight
SSD 203	1.620 lm	20 W	0.55 Kg

Body: Spun aluminum
Diffuser: Opal
Reflector: Spun aluminum

Beam Angle: 102°
Driver: Included
Voltage: 220~240 VAC

Color Temperature: 2700-3000-4000-5000-6500K
Led: Mid-Power

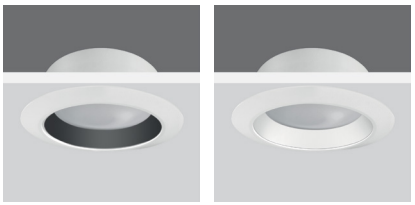

Optional (Black and White Reflector)

ACCESSORY



Honeycomb Louvre






Code	Cut-Out
SSD203	Ø180 mm

BOX DIMENSIONS
29x28x12 cm

BOX WEIGHT
1.2 kg





LUCIFER
Downlight

High energy-efficient Lucifer series fixtures can be used in many areas with the large usage area thereof including shops, hotels, restaurants, cafés, educational areas hospital and houses.

They can meet the investment in the usage area after a very short time even with the change of the existing systems. The lives of used Cob Led's are very long due to their fixture bodies and the aluminum coolers placed thereon.

INDEX



RAL COLORS

Std.
9016

Opt.
9005
9006

LUCIFER / SYMMETRICAL

IP20 | RoHS COMPLIANT | CE

Code	Luminous Flux	System Power	Weight
LCF/S 15	1.300 lm	15 W	0.95 Kg
LCF/S 27	2.295 lm	27 W	1.35 Kg
LCF/S 36	3.060 lm	36 W	1.75 Kg

Frame: Aluminum Injection
Diffuser: Prismatic Lens
Reflector: Aluminum

Cooler: Aluminum Extrusion
Beam Angle: Symmetrical
Voltage: 220~240 VAC


Color Temperature: 2700-3000-4000-5000-6500K
Driver: Included
Led: COB




Code	Cut-Out
LCF/S	∅206 mm

BOX DIMENSIONS
LCF15 25x25x32 cm
LCF27 25x25x32 cm
LCF36 25x25x32 cm

BOX WEIGHT
LCF15 1.2 kg
LCF27 1.6 kg
LCF36 2 kg



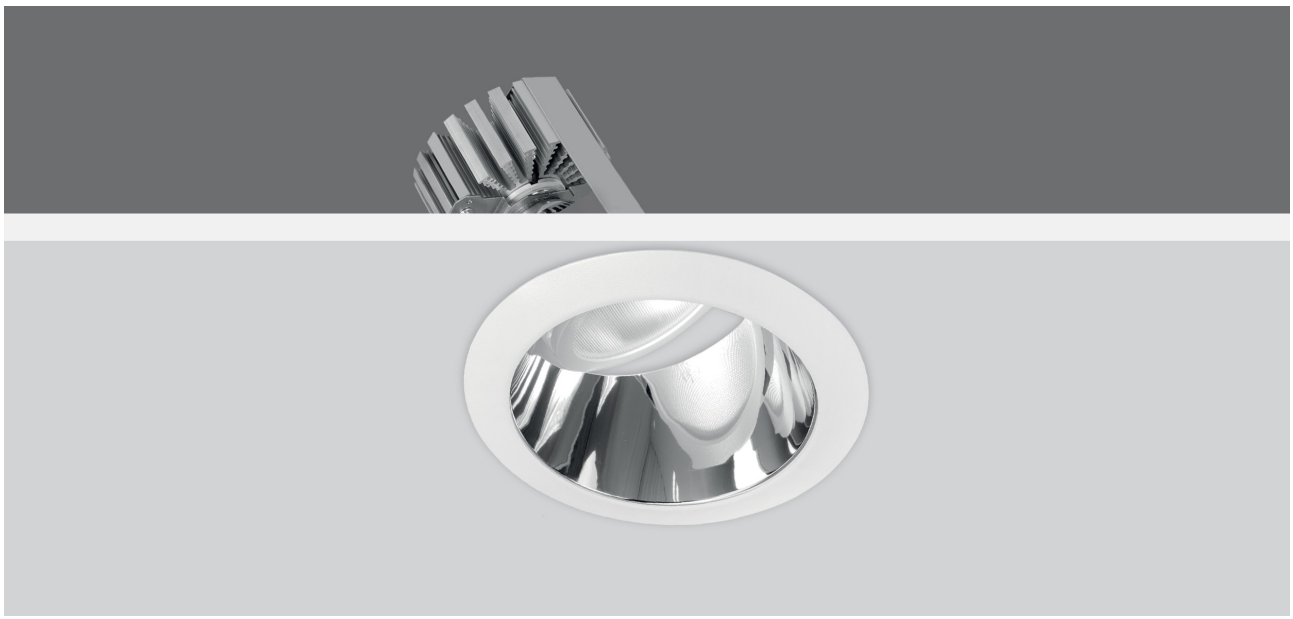

RAL COLORS

Std.
9016

Opt.
9005
9006

LUCIFER / ASYMMETRICAL

IP20 | RoHS COMPLIANT | CE

Code	Luminous Flux	System Power	Weight
LCF/AS 15	1.280 lm	15 W	0.95 Kg
LCF/AS 27	2.270 lm	27 W	1.35 Kg
LCF/AS 36	3.035 lm	36 W	1.75 Kg

Frame: Aluminum Injection
Diffuser: Prismatic Lens
Reflector: Aluminum

Cooler: Aluminum Extrusion
Beam Angle: Asymmetrical
Voltage: 220~240 VAC


Color Temperature: 2700-3000-4000-5000-6500K
Driver: Included
Led: COB



Code	Cut-Out
LCF/AS	Ø206 mm

BOX DIMENSIONS
LCF15 25x25x32 cm
LCF27 25x25x32 cm
LCF36 25x25x32 cm

BOX WEIGHT
LCF15 1.2 kg
LCF27 1.6 kg
LCF36 2 kg







SFR
Downlight

SFR model downlight fixtures are indispensable application elements for interior lighting with their compact and simple structure. They can be applied in hotels, schools, shopping centers and many other places. Reflectors used in the fixture to perform this task without requiring extra frame and provide an appearance integrated with the ceiling and which does not harm the aesthetics structure of the area thanks to the fine structure thereof. They offer a perfect solution in locations where dark light is desired and glare is unwanted by using black reflector.

INDEX



RAL COLORS

Std.
9016

Opt.
9005

SFR

IP20 | RoHS COMPLIANT | CE

Code	Luminous Flux	System Power	Weight
SFR13/S White	1.235 lm	13W	0.45 Kg
SFR13/S Black	1.090 lm	13W	0.45 Kg
SFR13/L White	1.200 lm	13W	0.45 Kg
SFR13/L Black	980 lm	13W	0.45 Kg

Body: Spun aluminum
Reflector: PC

Driver: Included
Voltage: 220~240 VAC


Color Temperature: 2700-3000-4000-5000-6500K
Led: COB

ACCESSORY



Honeycomb Louvre

SFR 13/S





SFR 13/L




Code	Cut-Out
SFR13/S	∅110 mm
SFR13/L	∅105 mm


BOX DIMENSIONS
SFR13/S 14x13x13 cm
SFR13/L 16x13x13 cm

BOX WEIGHT
SFR13/S 0.6 kg
SFR13/L 0.6 kg

SFR 13/S White



SFR 13/S Black






DNT
Downlight

The new aluminum-bodied spot luminaire combines durability with an elegant design, adding a modern touch to any space. Equipped with high-efficiency LED technology, it provides energy savings and long-lasting performance. Ideal for offices, stores, galleries, and residential areas, it delivers excellent lighting solutions. Its robust body ensures resistance against impact, while its minimalist form and refined look make it a functional, reliable, and stylish choice for interior designs.

INDEX

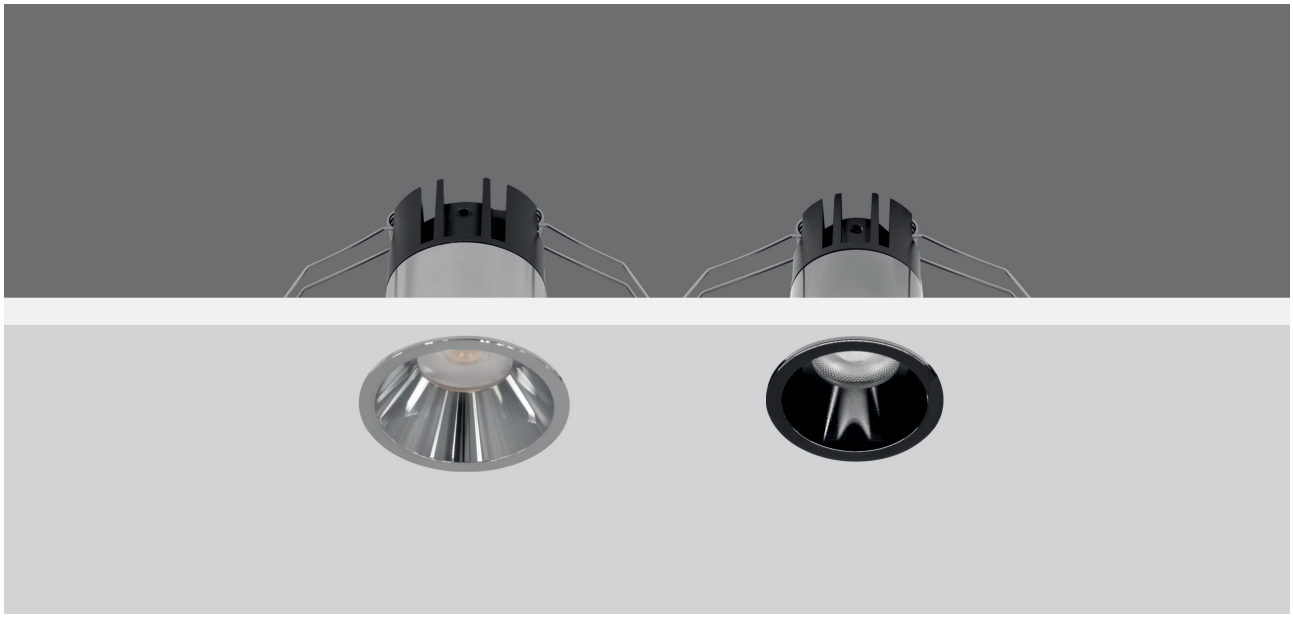

RAL COLORS

Std. 9016

Opt. 9005

DNT/CR

IP20 | RoHS COMPLIANT | CE


Code	Luminous Flux	System Power	Weight
DNT/CR 9	870lm	8W	0.15 Kg
DNT/CR 5	510lm	5W	0.10Kg

Body: Chrome coated aluminum
Reflector: Aluminum


Driver: Included
Voltage: 220~240 VAC

Color Temperature: 2700-3000-4000-5000-6500K
Led: COB

DNT/CR9




DNT/CR5




Code	Cut-Out
DNT/CR9	Ø45 mm
DNT/CR5	Ø35 mm

BOX DIMENSIONS
DNT/CR 8x8x10cm
DNT/CR 8x8x10cm

BOX WEIGHT
DNT/CR9 0.2Kg
DNT/CR5 0.15Kg



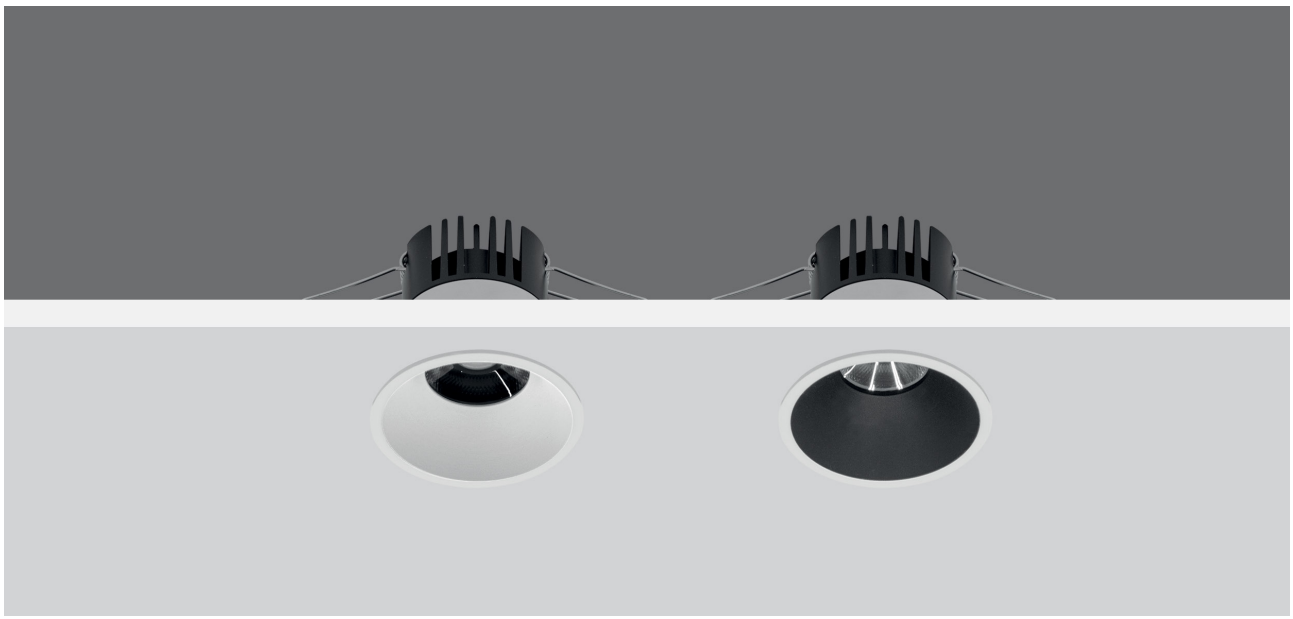

RAL COLORS

Std.
9016

Opt.
9005
9006

DNT/S1


IP20 | RoHS COMPLIANT | CE

Code	Luminous Flux	System Power	Weight
DNT/S1 (White)	1250lm	10W	0.25Kg
DNT/S2 (Black)	1200lm	12W	0.25Kg

Body: Aluminum
Reflector: Aluminum

Driver: Included
Voltage: 220~240 VAC


Color Temperature: 2700-3000-4000-5000-6500K
Led: COB




Code	Cut-Out
DNT/S1-S2	Ø63 mm

BOX DIMENSIONS
DNT/S1 10x10x9.5cm
DNT/S2 10x10x9.5cm

BOX WEIGHT
DNT/S1 0.3Kg
DNT/S2 0.3Kg



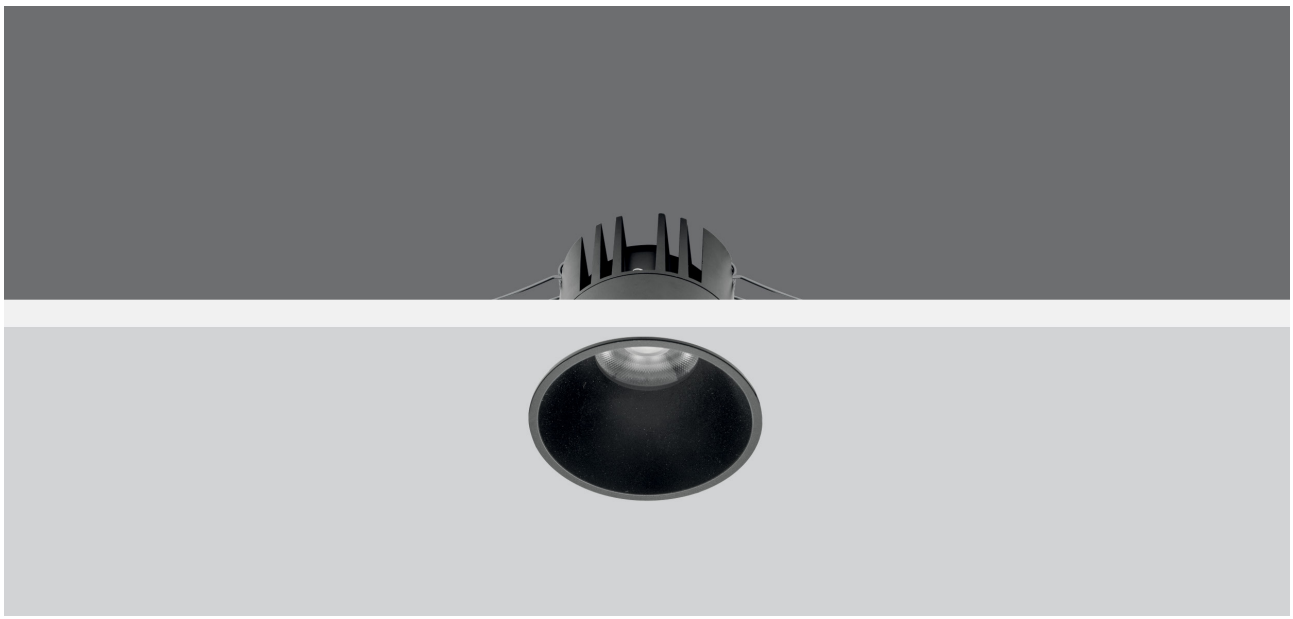

RAL COLORS

Std.
9016

Opt.
9005

DNT/S3


IP20 | RoHS COMPLIANT | CE

Code	Luminous Flux	System Power	Weight
DNT/S3	1.400lm	13 W	0.3Kg

Body: Aluminum
Reflector: Aluminum

Driver: Included
Voltage: 220~240 VAC


Color Temperature: 2700-3000-4000-5000K
Led: COB





Code	Cut-Out
DNT/S3	Ø73 mm

BOX DIMENSIONS
DNT/S3 10x10x9.5cm

BOX WEIGHT
DNT/S3 0.4Kg



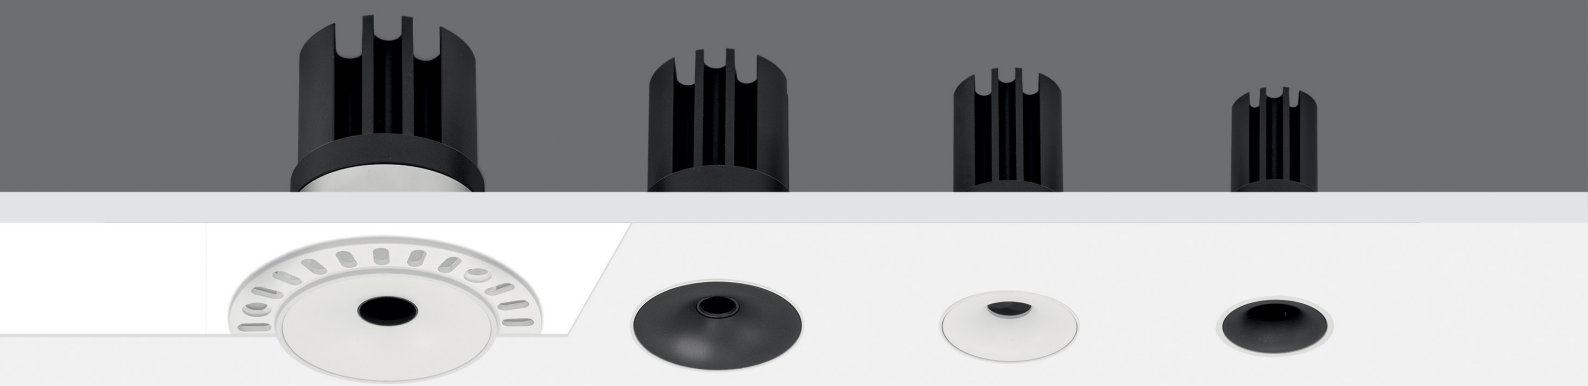




AGS
Downlight

This trimless luminaire series offers an aesthetic and modern solution with its special mounting system for plaster ceilings. The flanged edges are covered with plaster, allowing the fixture to be recessed into the ceiling for a frameless, seamless appearance. In this way, it integrates perfectly with architectural design, adding elegance and simplicity to the space. With its refined form, it is an ideal choice for contemporary interior lighting applications.

INDEX

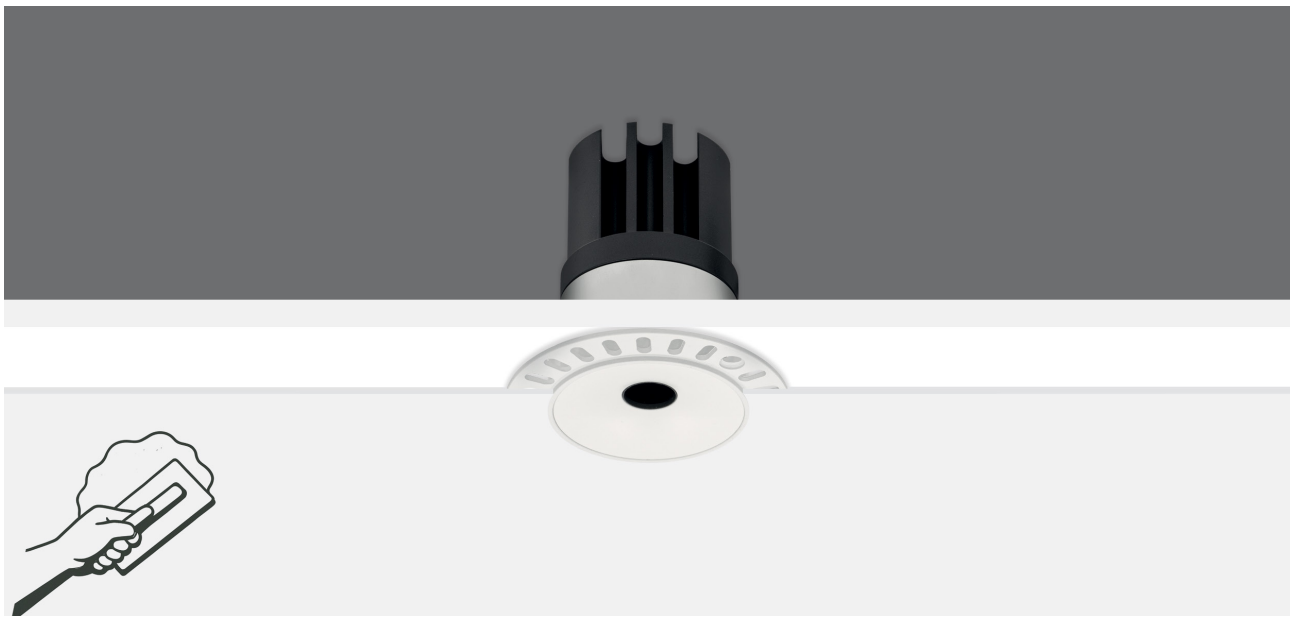


RAL COLORS
Std. 9016
Opt. 9005

AGS1

IP20 | RoHS COMPLIANT | CE

Code	Luminous Flux	System Power	Weight
AGS1	500lm	15W	0.35 Kg


Body: Aluminum
Reflector: Aluminum
Driver: Included
Voltage: 220~240 VAC
Color Temperature: 2700-3000-4000-5000-6500K
Led: COB



Code	Cut-Out
AGS1	Ø 62mm

BOX DIMENSIONS
10x10x13cm

BOX WEIGHT
0.5Kg






RAL COLORS

Std.
9016

Opt.
9005
9006





AGS2


IP20 | RoHS COMPLIANT | CE

Code	Luminous Flux	System Power	Weight
AGS2	130lm	10W	0.25 Kg

Body: Aluminum
Reflector: Aluminum

Driver: Included
Voltage: 220~240 VAC


Color Temperature: 2700-3000-4000-5000-6500K
Led: COB



Code	Cut-Out
AGS2	Ø 52mm

BOX DIMENSIONS
8x8x14cm

BOX WEIGHT
0.35Kg





RAL COLORS
Std.
9016
Opt.
9005


AGS3

IP20 | RoHS COMPLIANT | CE


Code	Luminous Flux	System Power	Weight
AGS3/30	70lm	5W	0.1 Kg
AGS3/40	130lm	10W	0.15 Kg

Body: Aluminum
Reflector: Aluminum
Driver: Included
Voltage: 220~240 VAC
Color Temperature: 2700-3000-4000-5000-6500K
Led: Power Led

AGS3/30




AGS3/40




Code	Cut-Out
AGS3/30	Ø 32mm
AGS3/40	Ø 42mm


BOX DIMENSIONS
AGS3 7x7x15cm
AGS4 8x8x14cm


BOX WEIGHT
AGS3 0.2Kg
AGS4 0.3Kg



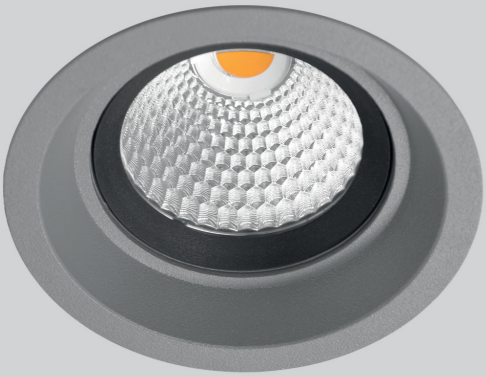

PULSAR
Downlight

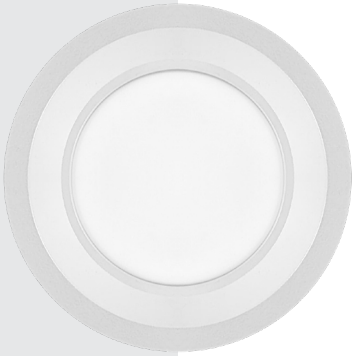

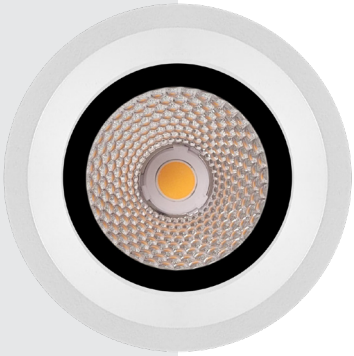

Pulsar downlight combines elegance and efficiency in modern interior designs. Its aluminum body provides effective heat dissipation for long-lasting use. It offers an ideal lighting solution for offices, stores, hotels, and residential areas. With its user-friendly design, it allows for easy installation and perfectly meets the needs of modern lighting.

INDEX



RAL COLORS

Std.
9016

Opt.
9005
9006

PULSAR

IP20-IP65 | RoHS COMPLIANT | CE

Code	Luminous Flux	System Power	Weight
PLS/C	2.300 lm	20 W	0.58 Kg
PLS/C	3.500 lm	30 W	0.58 Kg
PLS/OP	2.000 lm	20 W	0.58 Kg
PLS/OP	3.000 lm	30 W	0.58 Kg

HCL

Body: Aluminum Injection
Reflector: PC

Driver: Included
Voltage: 220~240 VAC

Color Temperature: 2700-3000-4000-5000-6500K, TW
Led: COB



IP65 cable gland (optional)



Code	Cut-Out
PLS	∅ 113mm

ACCESSORY




Honeycomb Louvre




BOX DIMENSIONS
15x15x10 cm



BOX WEIGHT
0.7 kg



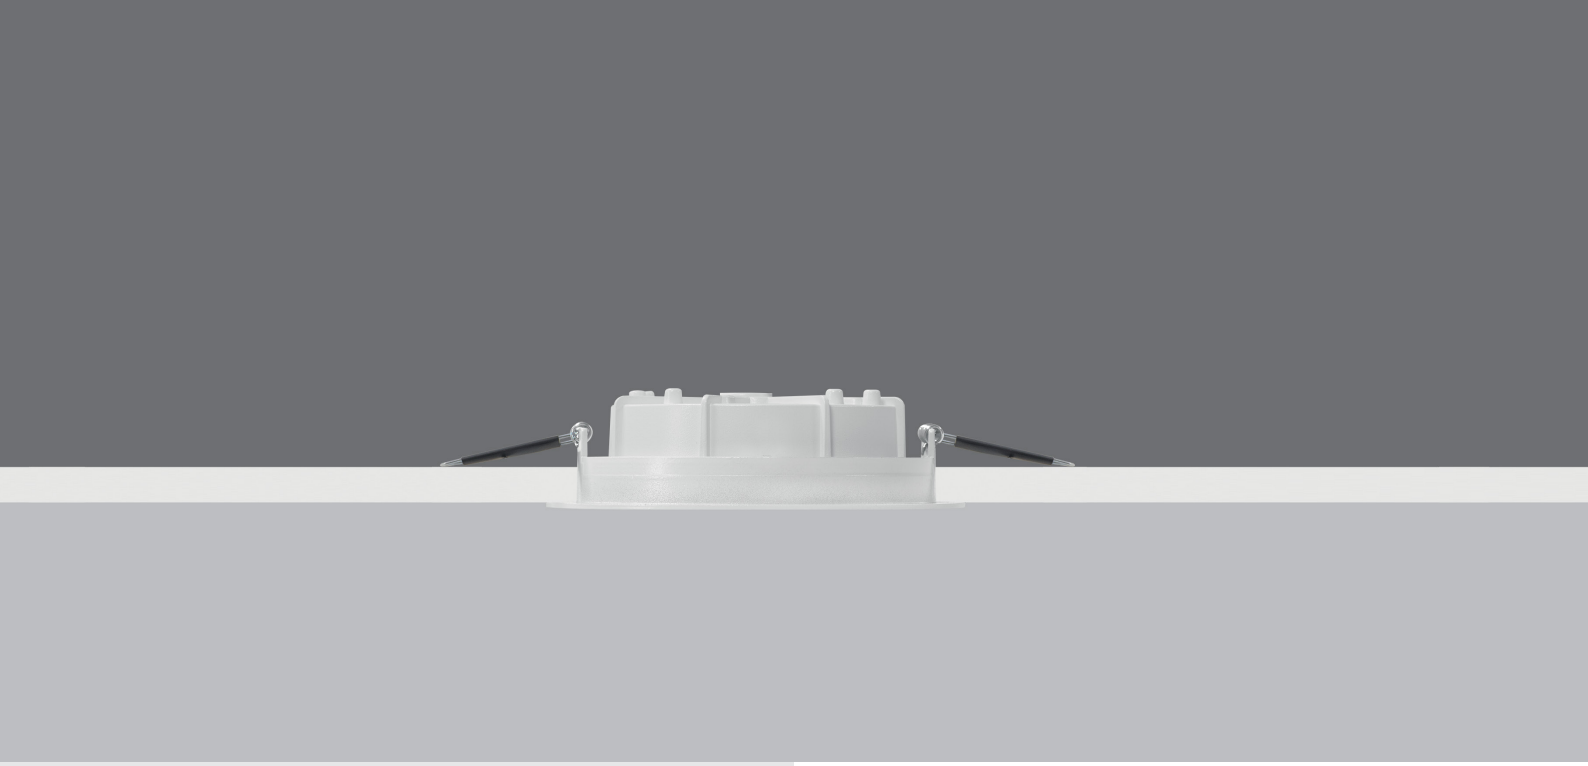

MSG/N
Downlight

The MSG/N is a premium recessed ceiling luminaire with a sleek and modern design that complements any space. Its sturdy aluminum housing ensures durability and long-lasting performance. With its clean lines and high-quality light output, it provides comfortable illumination. Ideal for offices, retail stores, hotels, and residences, the MSG/N combines aesthetics and functionality. It offers customizable solutions with various color and wattage options to meet your specific needs.

INDEX



RAL COLORS

Std.

9016

Opt.

9005

9006

MSG/N


IP20-IP65 | RoHS COMPLIANT | CE

Code	Luminous Flux	System Power	Weight
MSG/N 95/8	650lm	8W	0.3Kg
MSG/N 95/10	850lm	10W	0.3Kg
MSG/N 95/12	980lm	12W	0.3Kg
MSG/N 120/10	1.050 lm	10 W	0.65Kg
MSG/N 120/13	1.350 lm	13 W	0.65Kg
MSG/N 120/18	1.810 lm	18 W	0.65Kg
MSG/N/ 160/14	1.540 lm	14 W	0.85 Kg
MSG/N/ 160/20	2.150 lm	20 W	0.85 Kg

Body: Aluminum Injection
Diffuser: Opal

Driver: Included
Voltage: 220~240 VAC

Color Temperature: 2700-3000-4000-5000-6500K
Led: Mid-Power

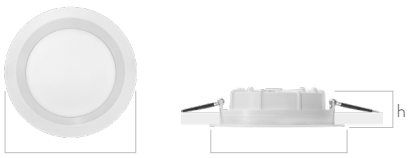

Code	a	h	Cut-Out
MSG/N 95	Ø120mm	50mm	Ø 107 mm
MSG/N 120	Ø165mm	50mm	Ø 150 mm
MSG/N 160	Ø202mm	50mm	Ø 178 mm


For models with IP65 protection, 25 mm is added to the height.

BOX DIMENSIONS

MSG/N 95 15x15x10 cm
MSG/N 120 20x20x10 cm
MSG/N 160 23x23x10 cm

BOX WEIGHT

0.5 kg
0.9 kg
1.1 kg





DYG
Downlight

The DYG is a semi-recessed spotlight model that stands out with its modern and functional design. Its practical spring-loaded mounting system allows for easy and secure installation in suspended ceilings. It offers an elegant lighting solution for offices, retail spaces and restaurants. With its minimalist design and high efficiency, it adds a touch of sophistication to any space.

INDEX



RAL COLORS

Std.
9016

Opt.
9005
9006

DYG

IP20 | RoHS COMPLIANT | CE

Code	Luminous Flux	System Power	Weight
DYG/5	505 lm	5 W	0.4Kg
DYG/10	1.050 lm	10 W	0.4Kg
DYG/15	1.500 lm	15 W	0.4Kg

HCL


Frame: Aluminum Injection
Reflector: PC

Voltage: 220~240 VAC
Driver: Included

Color Temperature: 2700-3000-4000-5000-6500K,TW
Led: COB



Ø 85mm




Ø 85mm

Code	Cut-Out
DYG	Ø 73 mm

BOX DIMENSIONS
10x10x15cm

BOX WEIGHT
0.5 kg






DML MAXI
Downlight

This modern LED spotlight fixture is a stylish and functional lighting solution designed for recessed ceiling installation. It features four high-efficiency spotlights, each of which can be adjusted independently. This allows focused lighting on desired areas within the space. Equipped with energy-saving LED technology, the fixture offers long-lasting performance. It is an ideal choice for offices, stores, exhibition areas, and modern living spaces. It provides both decorative and functional lighting. Easy to use and simple to install, this fixture combines practicality with contemporary design.

INDEX

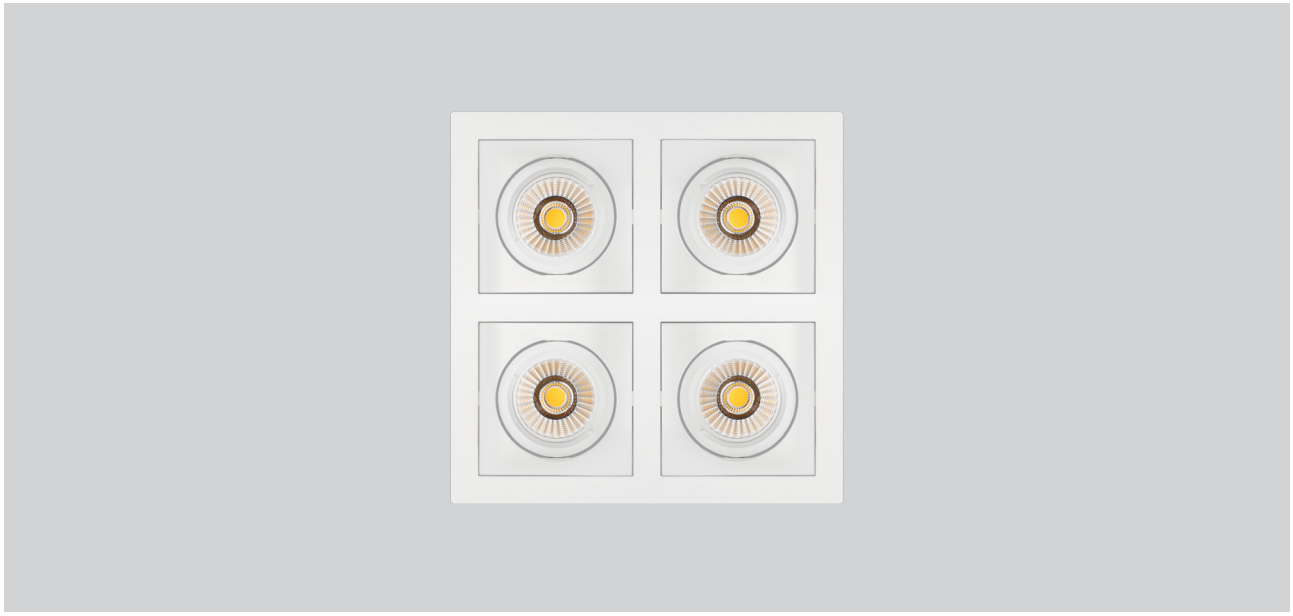

RAL COLORS

Std.
9016

Opt.
9005
9006

DML MAXI

IP20 | RoHS COMPLIANT | CE

Code	Luminous Flux	System Power	Weight
DML4/MX 13	5.900 lm	4x13W	2.6 Kg
DML4/MX 27	11.150 lm	4x27W	2.6Kg
DML4/MX 36	14.500 lm	4x36W	2.6 Kg

Front Frame : 1.5mm thick DKP sheet steel
Reflector: PC


Cooler: Aluminum injection
Driver: Included
Voltage: 220~240 VAC


Color Temperature: 2700-3000-4000-5000-6500K
Led: COB


ACCESSORY



Honeycomb Louvre








Adjustable

BOX DIMENSIONS
29x29x10 cm


BOX WEIGHT
3 kg



RAL COLORS

Std.
9016

Opt.
9005
9006

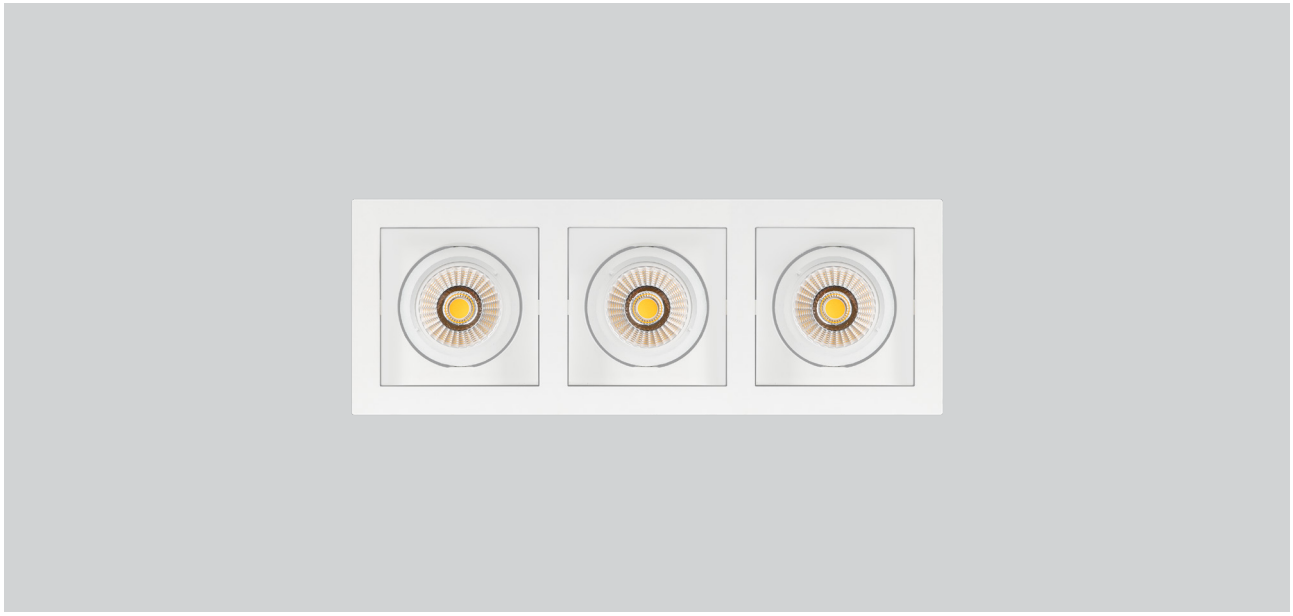

DML MAXI

IP20 | RoHS COMPLIANT | CE

Code	Luminous Flux	System Power	Weight
DML3/MX 13	4.425 lm	3x13W	2 Kg
DML3/MX 27	8.360 lm	3x27W	2 Kg
DML3/MX 36	10.875 lm	3x36W	2 Kg

Front Frame : 1.5mm thick DKP sheet steel
Reflector: PC


Cooler: Aluminum injection
Driver: Included
Voltage: 220~240 VAC


Color Temperature: 2700-3000-4000-5000-6500K
Led: COB


ACCESSORY



Honeycomb Louvre









Adjustable

BOX DIMENSIONS
42x16x10 cm

BOX WEIGHT
2.3 kg



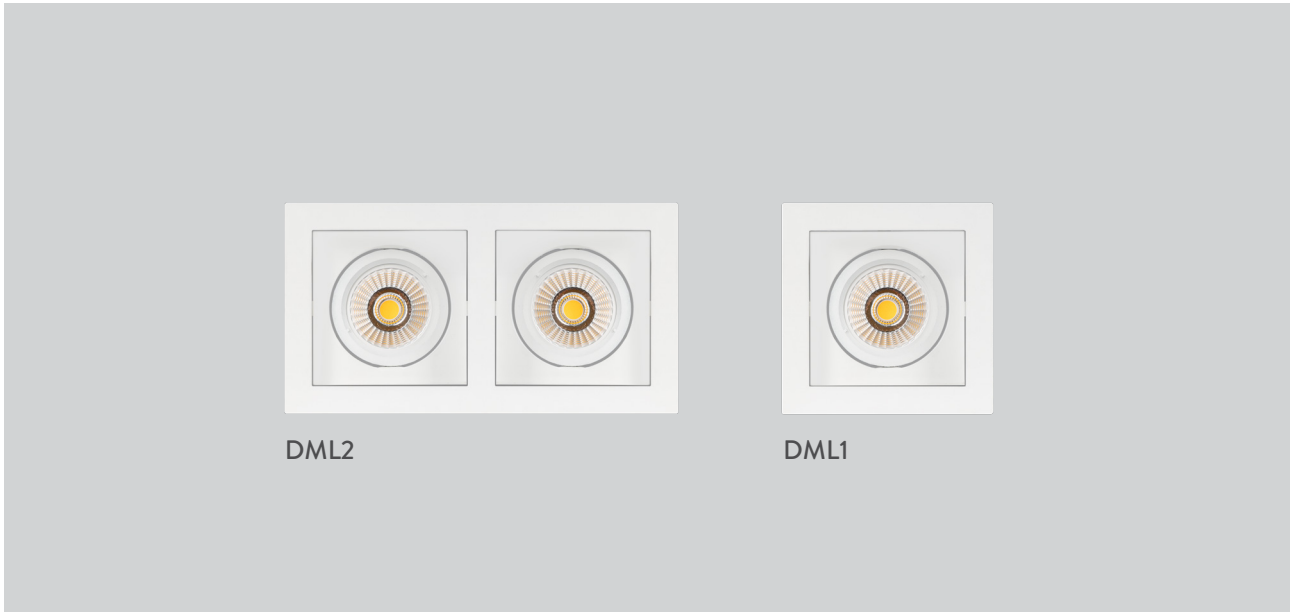

RAL COLORS

Std.
9016

Opt.
9005
9006

DML MAXI

IP20 | RoHS COMPLIANT | CE

Code	Luminous Flux	System Power	Weight
DML2/MX 13	2.950 lm	2x13W	1.4 Kg
DML2/MX 27	5.575 lm	2x27W	1.4Kg
DML2/MX 36	7.250 lm	2x36W	1.4 Kg
DML1/MX 13	1.475 lm	1x13W	0.7 Kg
DML1/MX 27	2.790lm	1x27W	0.7 Kg
DML1/MX 36	3.625 lm	1x36W	0.7 Kg

Front Frame : 1.5mm thick DKP sheet steel
Reflector: PC

Cooler: Aluminum injection
Driver: Included
Voltage: 220~240 VAC


Color Temperature: 2700-3000-4000-5000-6500K
Led: COB

ACCESSORY





Honeycomb Louvre

DML2



DML1






Adjustable



BOX DIMENSIONS
DML2/MX 29x16x10 cm
DML1/MX 16x16x10 cm




BOX WEIGHT
DML2/MX 1.6 kg
DML2/MX 0.8 kg






DML Mini
Downlight

This sleek recessed spotlight fixture delivers a perfect blend of modern aesthetics and versatile functionality. It includes four adjustable spotlights, allowing you to direct light precisely where it's needed—ideal for retail displays, or workspace areas. Built with high-efficiency LED technology, this fixture ensures long-lasting brightness while reducing energy consumption. Its slim, contemporary design makes it a great fit for offices, boutiques, galleries, and modern homes, offering both task lighting and decorative appeal. With hassle-free installation and a user-friendly design, this spotlight system combines practical performance with stylish sophistication, elevating any interior space.

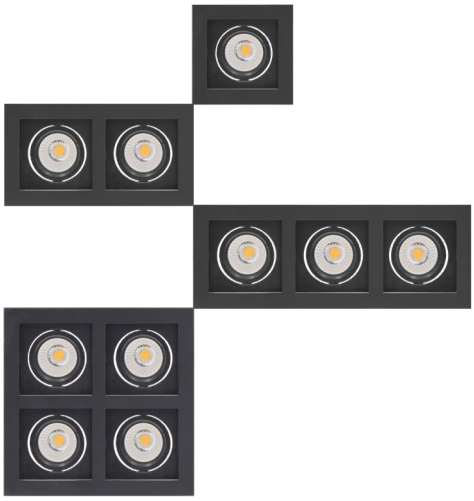

INDEX

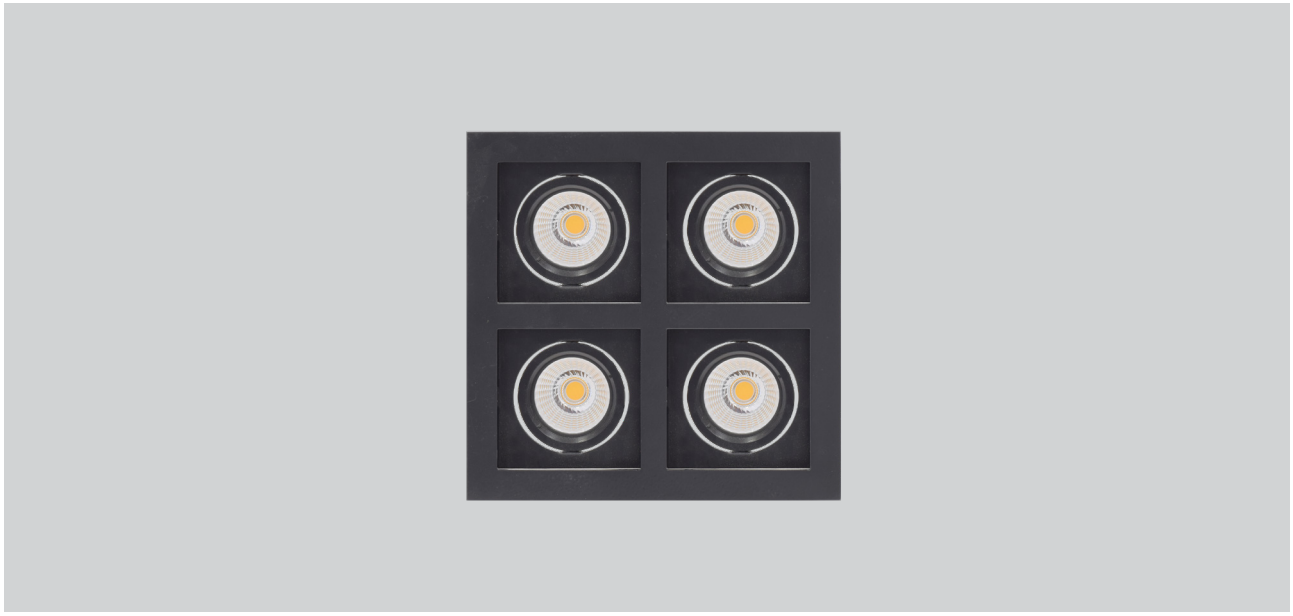

RAL COLORS

Std.

9016

Opt.

9005

9006

DML Mini

IP20 | RoHS COMPLIANT | CE

Code	Luminous Flux	System Power	Weight
DML4/MN 5	2.050 lm	4x5W	1.75 Kg
DML4/MN 10	4.080 lm	4x10W	1.75 Kg
DML4/MN 15	6.010 lm	4x15W	1.75 Kg

Front Frame : 1.5mm thick DKP sheet steel
Reflector: PC


Cooler: Aluminum injection
Driver: Included
Voltage: 220~240 VAC


Color Temperature: 2700-3000-4000-5000-6500K
Led: COB


ACCESSORY



Honeycomb Louvre








Adjustable

BOX DIMENSIONS
22x22x10 cm

BOX WEIGHT
2 kg




DML Mini

DOWNLIGHT

RAL COLORS

Std.
9016

Opt.
9005
9006

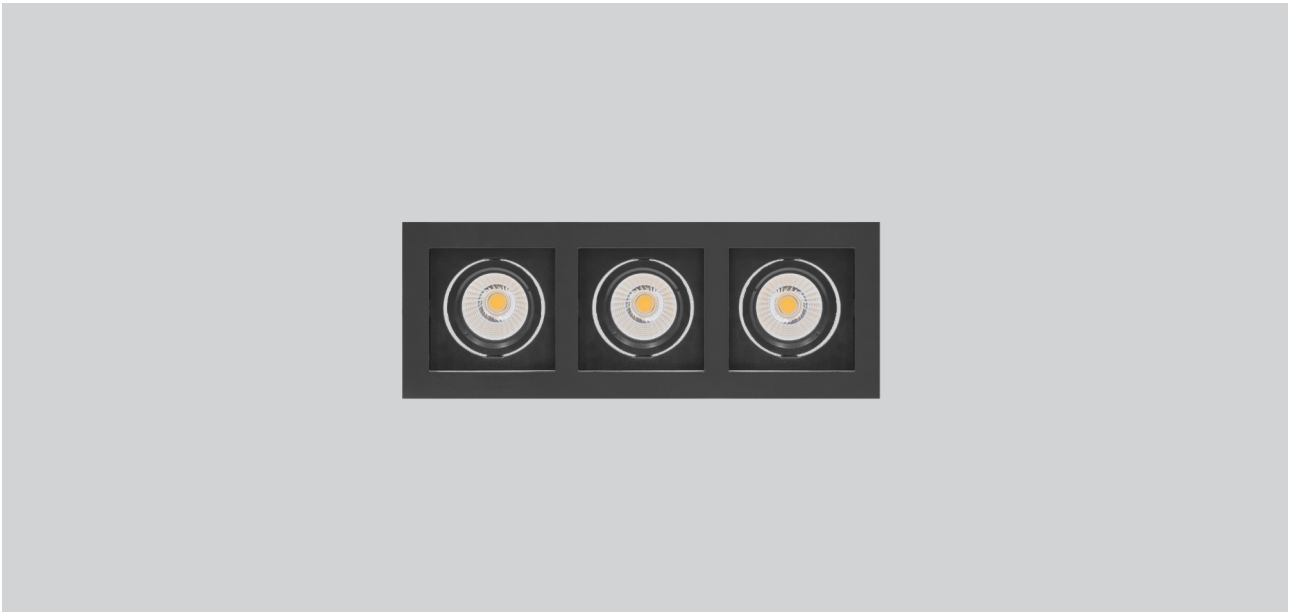

DML Mini

IP20 | RoHS COMPLIANT | CE

Code	Luminous Flux	System Power	Weight
DML3/MN 5	1.520lm	3x5W	1.3Kg
DML3/MN 10	3.100 lm	3x10W	1.3 Kg
DML3/MN 15	4.530 lm	3x15W	1.3 Kg

Front Frame : 1.5mm thick DKP sheet steel
Reflector: PC


Cooler: Aluminum injection
Driver: Included
Voltage: 220~240 VAC

Color Temperature: 2700-3000-4000-5000-6500K
Led: COB


ACCESSORY



Honeycomb Louvre









Adjustable

BOX DIMENSIONS
32x13x10 cm

KG
BOX WEIGHT
1.5 kg





DML2



DML1

RAL COLORS

Std.

9016

Opt.

9005

9006

DML Mini

IP20 | RoHS COMPLIANT | CE

Code	Luminous Flux	System Power	Weight
DML2/MN 5	1.050 lm	2x5W	0.9 Kg
DML2/MN 10	2.040lm	2x10W	0.9 Kg
DML2/MN 15	3.030 lm	2x15W	0.9 Kg
DML1/MN 5	515 lm	1x5W	0.5 Kg
DML1/MN 10	1.030lm	1x10W	0.5 Kg
DML1/MN 15	1.505 lm	1x15W	0.5 Kg

Front Frame : 1.5mm thick DKP sheet steel
Reflector: PC

Cooler: Aluminum injection
Driver: Included
Voltage: 220~240 VAC


Color Temperature: 2700-3000-4000-5000-6500K
Led: COB

ACCESSORY





Honeycomb Louvre

DML2



DML1






Adjustable

BOX DIMENSIONS
DML2/MN 22x13x10 cm
DML1/MN 13x13x10 cm

BOX WEIGHT
DML2/MN 1.1 kg
DML2/MN 0.6 kg






LKG
Downlight

With its modern design and high performance, the LKG spot luminaire offers both aesthetic and functional lighting for interior spaces. Its recessed mounting structure ensures seamless integration with the ceiling. The black inner surface minimizes glare, providing a more comfortable lighting experience. Equipped with high-efficiency LED technology, it ensures energy savings and long-lasting use. Its aluminum body optimizes heat management. Ideal for stores, hotels, offices, and gallery spaces, this luminaire combines visual elegance with technical excellence. With its sleek appearance, it adds a contemporary touch to any environment.

INDEX

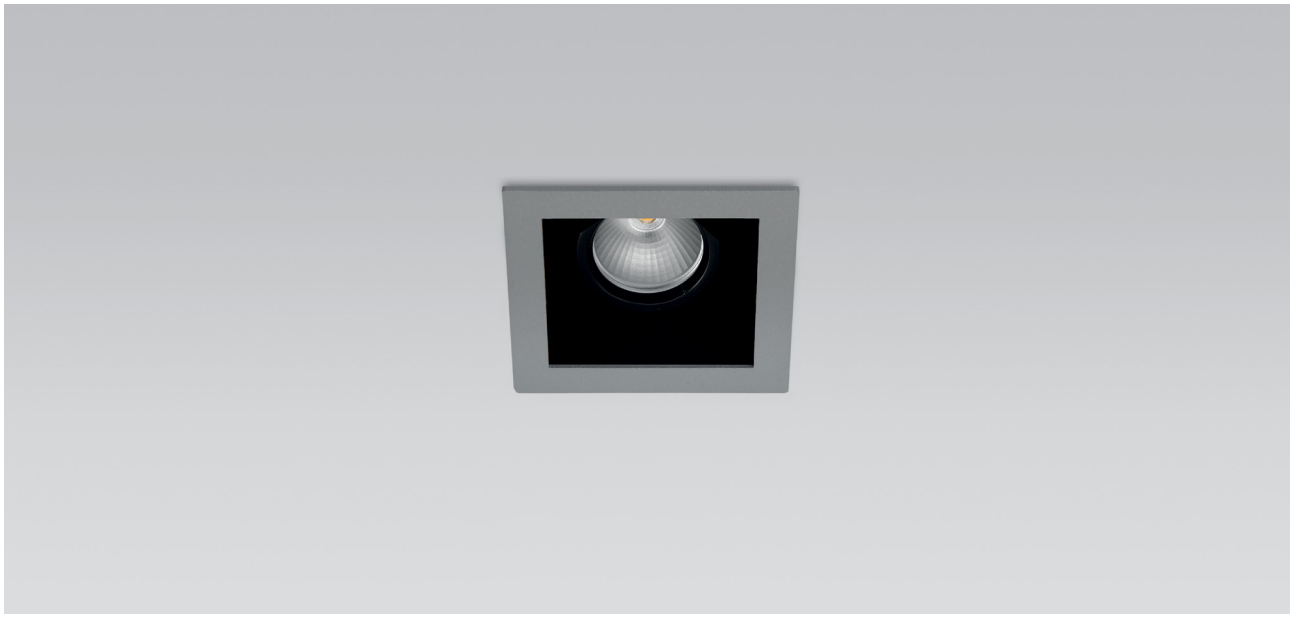

RAL COLORS
Std.
9006
Opt.
9005
9016

LKG

IP20 | RoHS COMPLIANT | CE


Code	Luminous Flux	System Power	Weight
LKG1/5	550 lm	5 W	0.5 Kg
LKG1/8	880 lm	8 W	0.5 Kg
LKG2/5	1.090 lm	2 x 5 W	0.9 Kg
LKG2/8	1.620 lm	2 x 8 W	0.9 Kg

Body: 1mm thick DKP sheet
Frame: 1.5 mm thick DKP sheet
Reflector: PC


Driver: Included
Voltage: 220~240 VAC


Color Temperature: 2700-3000-4000-5000-6500K
Led: COB

LKG1



LKG2





Code	Cut-Out
LKG1	93x93mm
LKG2	93x181mm


ACCESSORY



Honeycomb Louvre

BOX DIMENSIONS
LKG1 30x44x15 cm(6pcs)

BOX WEIGHT
LKG1 3.2 kg (6pcs)
LKG2 6 kg (6pcs)






PGH
Downlight

The PGH fixture is designed for aluminum mesh ceiling applications, offering ease of use and high performance. It meets all indoor lighting requirements for mesh ceilings and is specially engineered to fit various ceiling grids, ensuring a seamless and integrated appearance with the ceiling.

INDEX

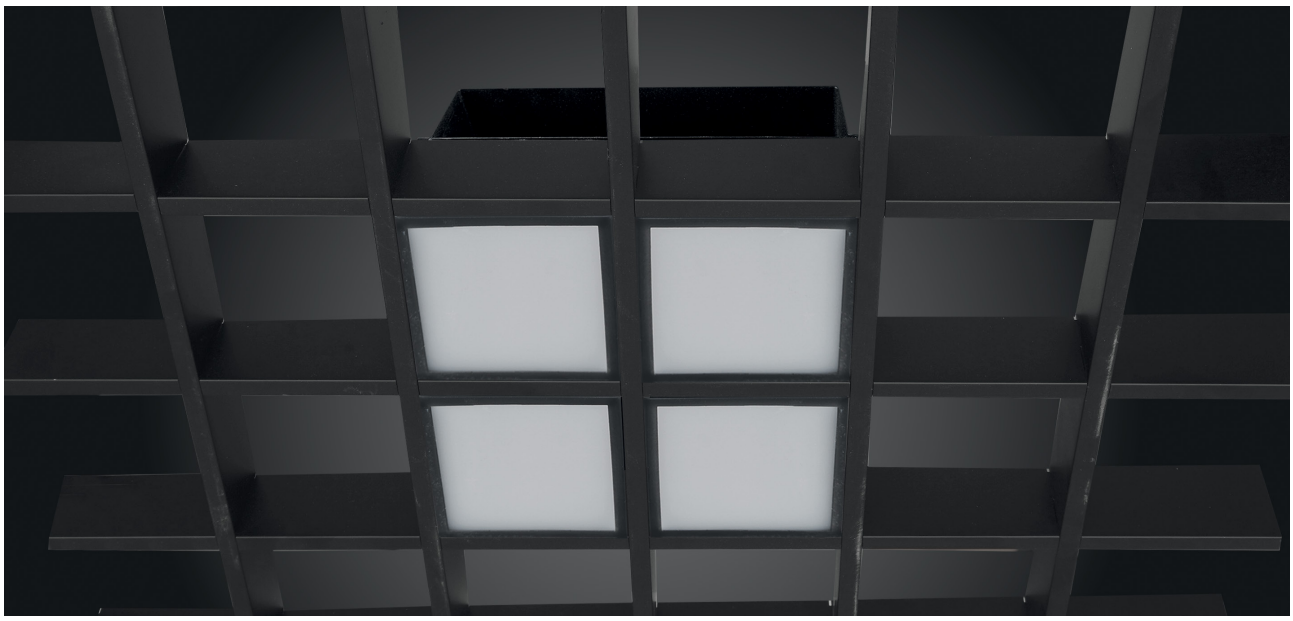

RAL COLORS
Std. 9005
Opt. 9016 9006

PGH4/SK

IP20 | RoHS COMPLIANT | CE

Code	Luminous Flux	System Power	Weight
PGH1/SK	525 lm	5 W	0.5 Kg
PGH4/SK	2.100 lm	20 W	1.3 Kg


Outer Frame: DKP sheet metal
Diffuser: Opal
Driver: Included
Beam Angle: 60°
Voltage: 220~240 VAC
Color Temperature: 3000-4000-5000-6500K
Led: Mid-Power

PGH4/CR


Code	Luminous Flux	System Power	Weight
PGH1/CR	500 lm	5 W	0.5 Kg
PGH4/CR	1.710 lm	20 W	1.3 Kg

Outer Frame: DKP sheet metal
Diffuser: Opal
Driver: Included
Beam Angle: 60°
Voltage: 220~240 VAC
Color Temperature: 3000-4000-5000-6500K
Led: Mid-Power


PGH1




PGH4/SK



PGH4/CR





BOX DIMENSIONS
25x25x18 cm

BOX WEIGHT
1.5 kg

RAL COLORS

Std.
9005

Opt.
9016
9006



PGH1/WP


IP54 | RoHS COMPLIANT | CE

Code	Luminous Flux	System Power	Weight
PGH1/WP	1.300 lm	13 W	1 Kg

Body: Aluminum Injection
Driver: Included
Outer Frame: 1mm thick DKP sheet


Beam Angle: 60°
Voltage: 220~240 VAC
Reflector: PMMA

Color Temperature: 2700-3000-4000-5000-6500K
Led: COB

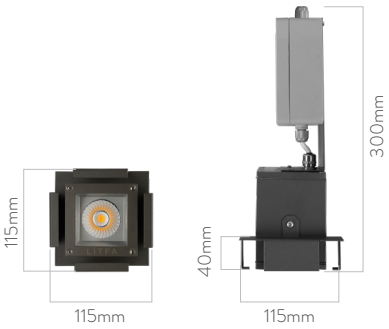


BOX DIMENSIONS
220x220x175 mm

BOX WEIGHT
1.2kg





RLM/D
Downlight

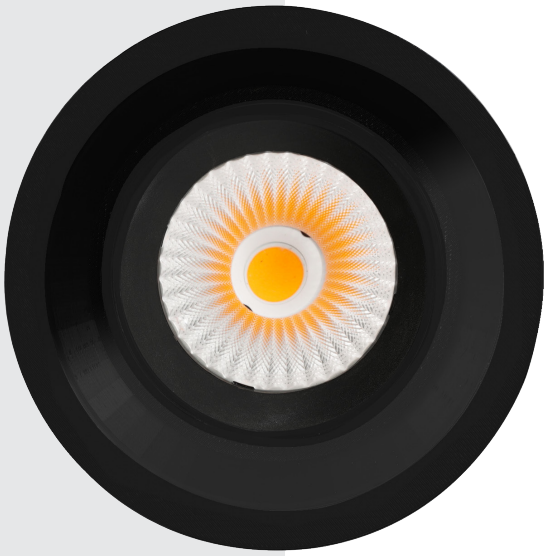

Ability to use spotlights that can be directed and angled as semi-recessed fixtures provides both decorative and practical benefits. Litpa combines all optical and technical features of track spotlights with the decorativeness of semi-recessed systems in RLM/D fixtures.

INDEX



RAL COLORS

Std.
9005

Opt.
9016
9006

RLM/D

IP20 | RoHS COMPLIANT | CE

Code	Beam Angle	Luminous Flux	System Power	Weight
RLM/D10 NB	15°	1.180 lm	10 W	0.60 Kg
RLM/D10 MB	40°	1.115 lm	10 W	0.60 Kg
RLM/D10 WB	60°	1.130 lm	10 W	0.60 Kg
RLM/D20 NB	15°	2.090 lm	20 W	0.60 Kg
RLM/D20 MB	40°	1.970 lm	20 W	0.60 Kg
RLM/D20 WB	60°	2.005 lm	20 W	0.60 Kg
RLM/D30 NB	15°	2.995 lm	30 W	0.60 Kg
RLM/D30 MB	40°	2.825 lm	30 W	0.60 Kg
RLM/D30 WB	60°	2.880 lm	30 W	0.60 Kg

Body: Aluminum Injection
Driver: Included

Reflector: PC
Voltage: 220~240 VAC


Color Temperature: 2700-3000-4000-5000-6500K
Led: COB

ACCESSORY




Honeycomb Louvre







NARROW



MEDIUM



WIDE





BOX DIMENSIONS
27x18x17 cm



BOX WEIGHT
0.80 Kg


RLM/DK
Downlight



RLM-DK is developed for suspended ceiling applications where a track system is not desired on the ceiling. All electrical connections and components of RLM-DK spots remain above the suspended ceiling.

This provides a practical solution for all types of suspended ceiling applications, where only the spot, which can be directed in all directions and has different optical options, is visible in the space.

INDEX

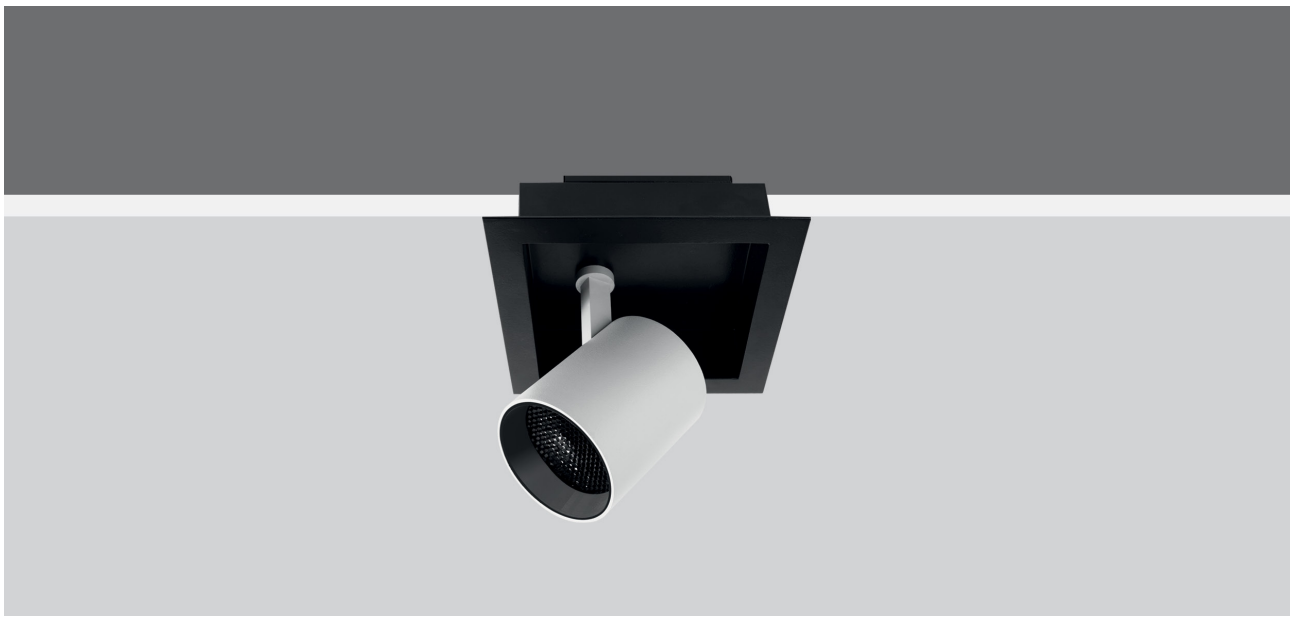

RAL COLORS

Std.
9006

Opt.
9005
9016

RLM DK

IP20 | RoHS COMPLIANT | CE

Code	Beam Angle	Luminous Flux	System Power	Weight
RLM-DK NB	15°	1.180 lm	10 W	0.60 Kg
RLM-DK MB	40°	1.115 lm	10 W	0.60 Kg
RLM-DK WB	60°	1.130 lm	10 W	0.60 Kg
RLM-DK NB	15°	2.090 lm	20 W	0.60 Kg
RLM-DK MB	40°	2.005 lm	20 W	0.60 Kg
RLM-DK WB	60°	2.005 lm	20 W	0.60 Kg
RLM-DK NB	15°	3.030 lm	30 W	0.60 Kg
RLM-DK MB	40°	3.005 lm	30 W	0.60 Kg
RLM-DK WB	60°	3.010 lm	30 W	0.60 Kg

Body: Aluminum Injection
Body Frame: DKP Sheet metal
Driver: Included


Reflector: PC
Voltage: 220~240 VAC


Color Temperature: 2700-3000-4000-5000-6500K
Led: COB

ACCESSORY



Honeycomb Louvre






Code	Cut-Out
RLM/DK	280x280mm


BOX DIMENSIONS
37x37x12 cm

BOX WEIGHT
0.90 Kg


NARROW BEAM



MEDIUM BEAM



WIDE BEAM



Surface Mounted Downlights

RLP/C
PNS
RLP/S
RLP/RY
RLM/RY



RLP/C

Surface Mounted Downlight

These elegant surface-mounted spot fixtures offer high efficiency with a modern chrome-finished reflector, providing sophisticated lighting for various applications. The reflector ensures controlled light distribution, creating a sharp and stylish lighting effect. Thanks to their circular design, they are suitable for both residential and commercial spaces. Engineered for long-lasting performance, they combine energy efficiency with a premium aesthetic. Ideal for adding a touch of elegance to any space, these spot fixtures blend functionality with timeless design.

INDEX



RAL COLORS

Std.

9016

Opt.

9005

9006

RLP/C

IP20 | RoHS COMPLIANT | CE

Code	Beam Angle	Luminous Flux	System Power	Weight
RLP/C	15°	1.530 lm	15 W	0.55 Kg
RLP/C	36°	1.510 lm	15 W	0.55 Kg
RLP/C	55°	1.500 lm	15 W	0.55 Kg

Body: Aluminum Injection
Reflector: PC

Driver: Included
Voltage: 220~240 VAC

Color Temperature: 2700-3000-4000-5000-6500K
Led: COB


ACCESSORY



Honeycomb Louvre



85 mm




Ø 85mm


BOX DIMENSIONS
18x18x12 cm

BOX WEIGHT
0.70kg

15°



36°





PNS

Surface Mounted Downlight

The highly energy-efficient PNS model belongs to the downlight fixture category. Its opal diffuser provides uniform light distribution, ensuring comfortable and balanced illumination for a wide range of applications. The circular form of the fixture allows for easy and flexible installation in various spaces.

Designed for long-term, high-efficiency lighting performance, PNS fixtures are manufactured using high-quality materials to ensure durability, reliability, and visual comfort.

INDEX



RAL COLORS
Std.
9016
Opt.
9005
9006

PNS

IP20 | RoHS COMPLIANT | CE

Code	Beam Angle	Luminous Flux	System Power	Weight
PNS/13	110°	1.050 lm	13 W	0.55 Kg
PNS/18	110°	1.470 lm	18 W	0.55 Kg

Body: DKP Sheet Metal
Diffuser: Opal
Driver: Included
Voltage: 220~240 VAC
Color Temperature: 2700-3000-4000-5000-6500K
Led: Mid Power




∅ 180mm



∅ 180mm

BOX DIMENSIONS
20x20x12 cm

BOX WEIGHT
0.75kg





RLP/S

Surface Mounted Downlight

RLP/S is designed to suit the needs of hanging fittings or surface mounted fixtures. Its elegant and proportional style combine with high performance and safety aspects. New generation high performance COB LEDs furnish extremely good fixture efficiency and stable operation by virtue of high-efficient reflectors.

INDEX



RAL COLORS

Std.
9016

Opt.
9005
9006

RLP/S

IP20 | RoHS COMPLIANT | CE


Code	Beam Angle	Luminous Flux	System Power	Weight
RLP/S NB	24°	1.050 lm	10 W	0.6 Kg
RLP/S MB	40°	1.000 lm	10 W	0.6 Kg
RLP/S WB	60°	1.020 lm	10 W	0.6 Kg
RLP/S NB	24°	1.400 lm	15 W	0.6 Kg
RLP/S MB	40°	1.350 lm	15 W	0.6 Kg
RLP/S WB	60°	1.380 lm	15 W	0.6 Kg
RLP/SM NB	24°	1.050 lm	10 W	0.76 Kg
RLP/SM MB	40°	1.000 lm	10 W	0.76 Kg
RLP/SM WB	60°	1.020 lm	10 W	0.76 Kg
RLP/SM NB	24°	1.400 lm	15 W	0.76 Kg
RLP/SM MB	40°	1.350 lm	15 W	0.76 Kg
RLP/SM WB	60°	1.380 lm	15 W	0.76 Kg

Body: Aluminum
Reflector: PC
Front Glass: 3mm thick tempered glass

Driver: Included
Voltage: 220~240 VAC

Color Temperature: 2700-3000-4000-5000-6500K
Led: COB






ACCESSORY



Honeycomb Louvre

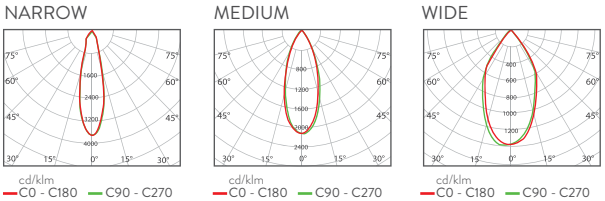


BOX DIMENSIONS
RLP/S 36x36x13 cm
RLP/SM 36x36x13 cm

BOX WEIGHT
RLP/S 0.8kg
RLP/SM 1 kg

RLP/RY

Surface Mounted Downlight

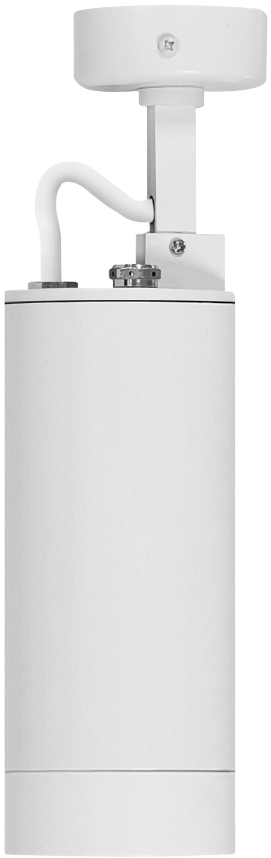

The RLP-RY spotlight is designed for surface-mounted applications, offering the same advanced optical performance as the entire RLP series. Its base includes a dedicated space for seamless ceiling installation. Despite being a surface-mounted fixture, it provides full flexibility in directing light to any angle and in any direction.

INDEX



RAL COLORS

Std.
9016

Opt.
9005
9006

RLP/RY

IP20 | RoHS COMPLIANT | CE

Code	Beam Angle	Luminous Flux	System Power	Weight
RLP/RY 10 NB	24°	1.050 lm	10 W	0.93 Kg
RLP/RY 10 MB	40°	1.000 lm	10 W	0.93 Kg
RLP/RY 10 WB	60°	1.020 lm	10 W	0.93 Kg
RLP/RY 15 NB	24°	1.470 lm	15 W	0.93 Kg
RLP/RY 15 MB	40°	1.415 lm	15 W	0.93 Kg
RLP/RY 15 WB	60°	1.440 lm	15 W	0.93Kg

Body: Aluminum
Reflector: PC

Driver: Included
Voltage: 220~240 VAC

Color Temperature: 2700-3000-4000-5000-6500K
Led: COB

IP65 TYPE
(Optional)



ACCESSORY
(Honeycomb Louvre)







BOX DIMENSIONS
36x36x13 cm

BOX WEIGHT
1.1kg


NARROW



MEDIUM



WIDE



RLM/RY

Surface Mounted Downlight



RLM/RY is a spotlight developed for surface-mounted uses. It possesses all the optical features of the RLM series. There is a space at the base of the spotlight for easy ceiling mounting. Although it is surface-mounted, it allows light to be directed in all directions and at all angle.

INDEX



RAL COLORS
Std.
9016
Opt.
9005
9006

RLM/RY

IP20 | RoHS COMPLIANT | CE

Code	Beam Angle	Luminous Flux	System Power	Weight
RLM/RY10 NB	15°	1.180 lm	10 W	0.60 Kg
RLM/RY10 MB	40°	1.115 lm	10 W	0.60 Kg
RLM/RY10 WB	60°	1.130 lm	10 W	0.60 Kg
RLM/RY20 NB	15°	2.090 lm	20 W	0.60 Kg
RLM/RY20 MB	40°	1.970 lm	20 W	0.60 Kg
RLM/RY20 WB	60°	2.005 lm	20 W	0.60 Kg
RLM/RY30 NB	15°	2.995 lm	30 W	0.60 Kg
RLM/RY30MB	40°	2.825 lm	30 W	0.60 Kg
RLM/RY30 WB	60°	2.880 lm	30 W	0.60 Kg

Body: Aluminum
Reflector: PC

Driver: Included
Voltage: 220~240 VAC

Color Temperature: 2700-3000-4000-5000-6500K
Led: COB


GOLD REFLECTOR



ACCESSORY




Honeycomb Louvre




BOX DIMENSIONS
27x18x17 cm

BOX WEIGHT
0.8 Kg


NARROW



MEDIUM



WIDE



Track Spotlights

TRACKS & ACCESSORIES
SAKURA
FASHIONLED
RLM/T



Tracks and Accessories


The body of this track system is made of extruded aluminum. The internal insulation profiles are made of plastic material. The phase and neutral conductors consist of round cross-section copper wires. The grounding contact is directly machined onto the aluminum body.

INDEX

TRACK ACCESSOIRES



RAE



RAL



RAB



RAU



RAA


TRACK SYSTEM

IP20 | RoHS COMPLIANT | CE

Code	Definition	Control
RYS3	Aluminum extrusion, surface mounted, 3 phase	-
RYG3	Aluminum extrusion, recessed mounted, 3 phase	-
RYS3/D	Aluminum extrusion, surface mounted, 3 phase	DALI
RYG3/D	Aluminum extrusion, recessed mounted, 3 phase	DALI

ACCESSOIRES

Code	Definition
RAE	Live-end connector
RAL	L connector
RAB	Mini joiner
RAU	End cap
RAA	Wire suspension hanger

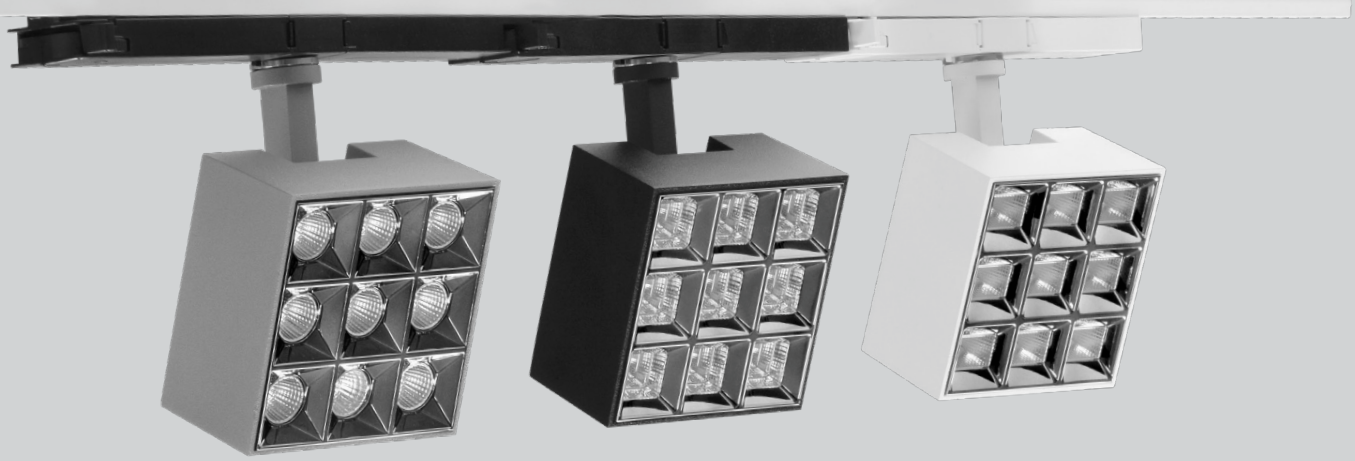


SAKURA


Track Spot Combinations

Sakura is a track-mounted spotlight designed for stores, showcases, and other retail applications. It can be used effectively in many areas with its design that can be easily rotated in any direction. Its aluminum body provides perfect heat transfer and performs the cooling task required for leds in the best way. In this way, high efficiency leds have a very long life.



INDEX

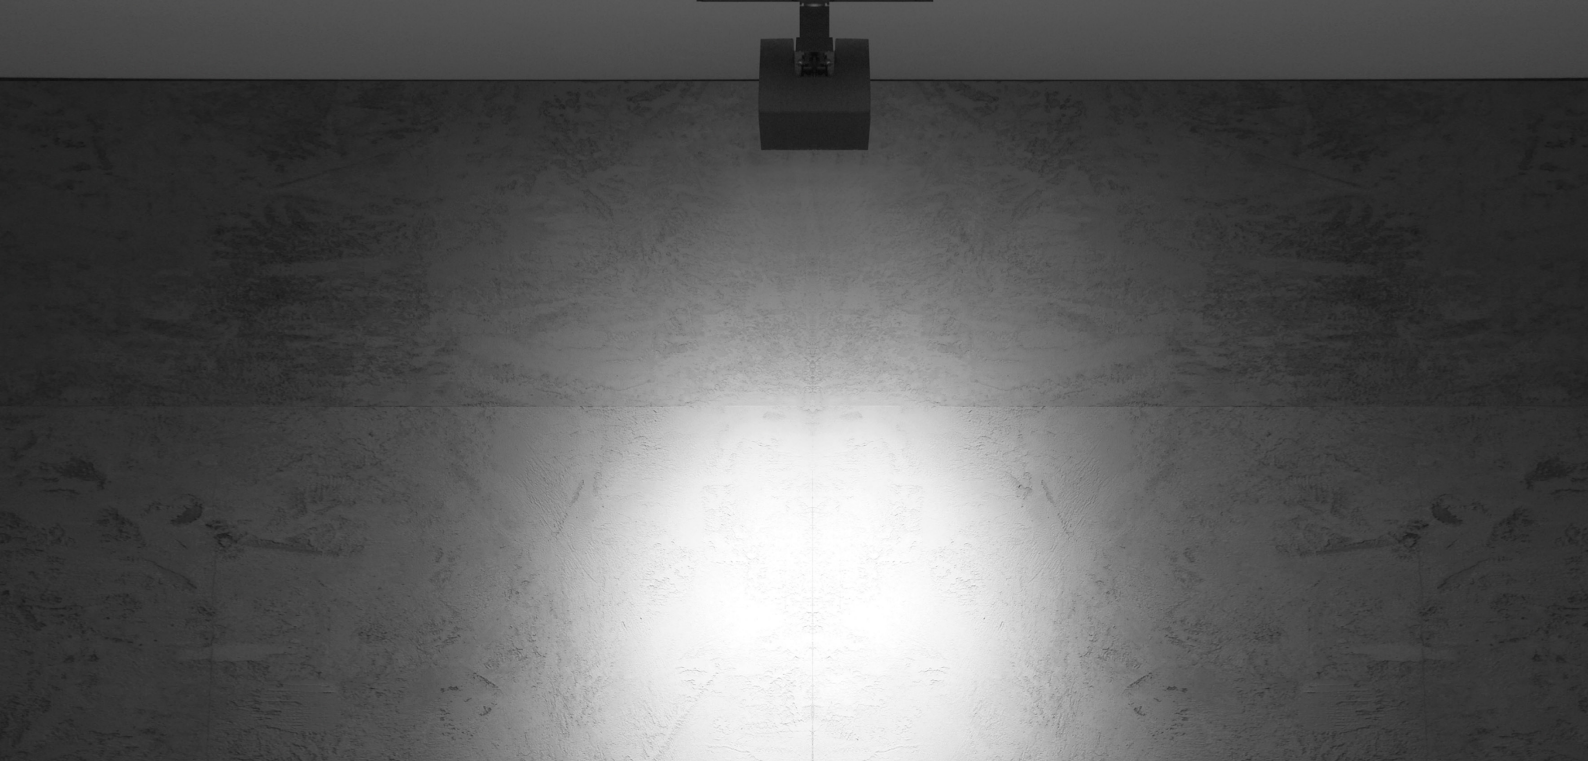

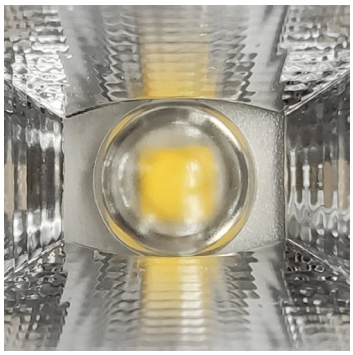


OPTICAL DIVERSITY

In addition to the high quality optical systems used in the luminaires, the LEDs used provide high savings thanks to their high efficiency. Thanks to the aluminum body, it provides good thermal conduction, allowing the LEDs to always operate at low temperatures.



PRECISION LIGHTING OPTICS

The optical elements used in the fixtures provide different light distributions to meet the technical conditions of the places to be illuminated. The optical elements used contain highly efficient reflective surfaces. Glare is minimal.

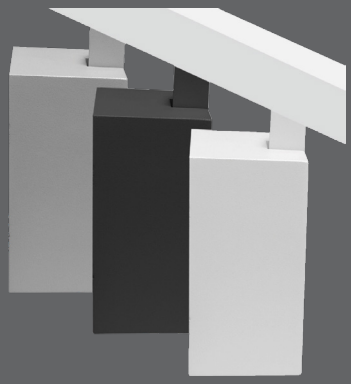

3 DIFFERENT COLORS

The luminaires are designed in 3 different colors as white, black and gray. This variety of colors provided by the fixtures allows color selection according to the decoration of the spaces. In this way, the adaptation of the fixtures to their usage areas and their aesthetic contribution can be increased. The luminaires can fully meet the lighting needs of the environments thanks to two different sizes and wattage options.

INDEX

RAL COLORS
Std.
9016
Opt.
9005
9006



SAKURA MINI

IP20 | RoHS COMPLIANT | CE

Code	Beam Angle	Luminous Flux	System Power	Weight
SKR Mini NB	28°	960 lm	11 W	0.8 Kg
SKR Mini WB	52°	955 lm	11 W	0.8 Kg

Body: Aluminum Injection
Lens: PMMA
Driver: Included
Voltage: 220~240VAC
Color Temperature: 3000-4000-5000-6500K
Led: High Power Led

Optional







BOX DIMENSIONS
15x12x7 cm


BOX WEIGHT
1.1 Kg

NARROW



WIDE



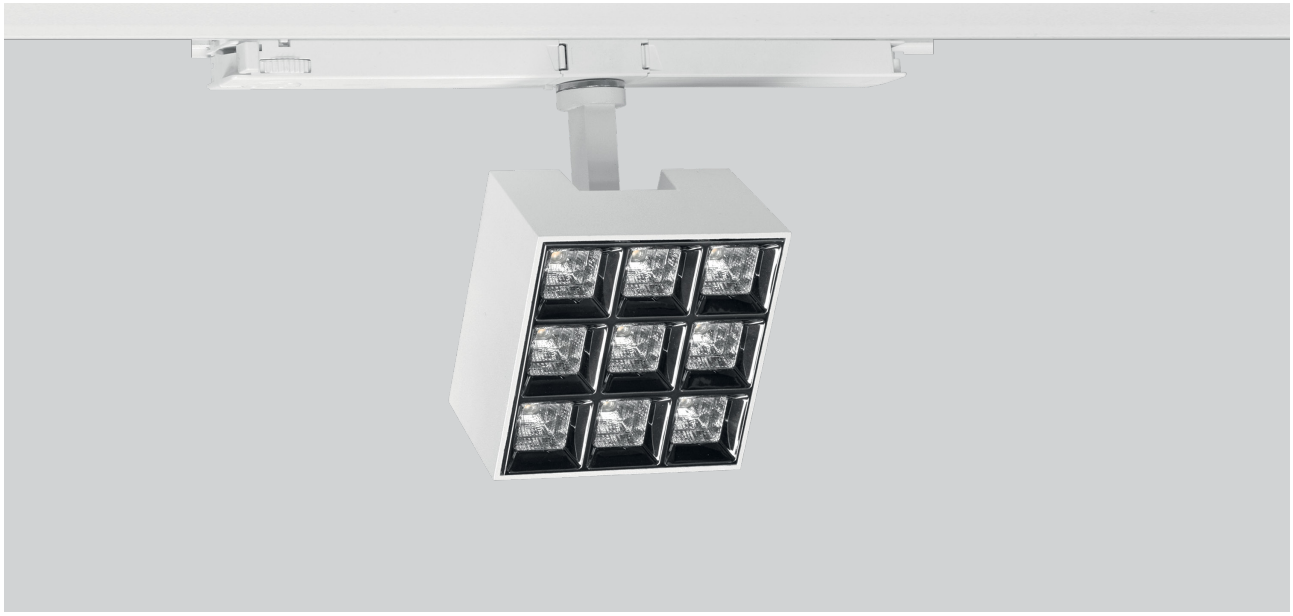

RAL COLORS

Std.
9016

Opt.
9005
9006

SAKURA OKI

IP20 | RoHS COMPLIANT | CE

Code	Beam Angle	Luminous Flux	System Power	Weight
SKR OKI NB	12°	2.290 lm	27 W	0.9 Kg
SKR OKI MB	38°	2.590 lm	27 W	0.9 Kg
SKR OKI WB	50°	2.610 lm	27 W	0.9 Kg
SKR OKI VWB	67°	2.720 lm	27 W	0.9 Kg

Body: Aluminum Injection
Lens: PMMA


Driver: Included
Voltage: 220~240VAC

Color Temperature: 3000-4000-5000-6500K
Led: High Power Led


Optional









NARROW




MEDIUM



WIDE



VERY WIDE



BOX DIMENSIONS
20x12x7 cm

BOX WEIGHT
1.2 Kg



RAL COLORS

Std.
9016


Opt.
9005
9006

SAKURA LINE

IP20 | RoHS COMPLIANT | CE


Code	Beam Angle	Luminous Flux	System Power	Weight
SKR LINE	28°	730 lm	7 W	0.65 Kg

Body: Aluminum Injection
Lens: PMMA
Driver: Included
Voltage: 220~240VAC
Color Temperature: 3000-4000-5000-6500K
Led: Mid Power



BOX DIMENSIONS
24x14x5 cm

BOX WEIGHT
1 Kg




Unlu Mamuller
Organik Ürünler
FIRSAT



FASHIONLED

Track Spot

The FASHIONLED fixture can be used easily and practically thanks to its design, which allows it to be moved and rotated in all directions when mounted on rails. It is ideal for use in stores, shop windows, and accent lighting applications. The highly efficient COB LEDs ensure a very long service life.



INDEX



RAL COLORS

Std.
9016

Opt.
9005
9006

RLP 50

IP20 | RoHS COMPLIANT | CE

Code	Beam Angle	Luminous Flux	System Power	Weight
RLP/50/8	34°	810 lm	8 W	0.4 Kg
RLP/50/10	34°	1.020 lm	10 W	0.4 Kg
RLP/50/13	34°	1.300 lm	13 W	0.4 Kg

Body: Aluminum extrusion
Reflector: Aluminum


Driver: Included
Voltage: 220~240 VAC

Color Temperature: 2700-3000-4000-5000-6500K
Led: COB



BOX DIMENSIONS
27x18x17 cm

BOX WEIGHT
0.6 Kg





RAL COLORS

Std.
9016

Opt.
9005
9006

RLP 70

IP20 | RoHS COMPLIANT | CE

Code	Beam Angle	Luminous Flux	System Power	Weight
RLP/70/20	34°	2.030 lm	20 W	0.57 Kg
RLP/70/27	34°	2.720 lm	27 W	0.57 Kg

Body: Aluminum extrusion
Reflector: Aluminum


Driver: Included
Voltage: 220~240 VAC

Color Temperature: 2700-3000-4000-5000-6500K
Led: COB



BOX DIMENSIONS
27x18x17 cm

BOX WEIGHT
0.8 Kg





RAL COLORS

Std.
9016

Opt.
9005
9006

RLP 90

IP20 | RoHS COMPLIANT | CE

Code	Beam Angle	Luminous Flux	System Power	Weight
RLP/90/27	34°	2.730 lm	27 W	0.65 Kg
RLP/90/30	34°	3.060lm	30 W	0.65 Kg
RLP/90/36	34°	3.700 lm	36 W	0.65 Kg

Body: Aluminum extrusion
Reflector: Aluminum


Driver: Included
Voltage: 220~240 VAC

Color Temperature: 2700-3000-4000-5000-6500K
Led: COB



BOX DIMENSIONS
27x18x17 cm

BOX WEIGHT
0.9 Kg





RLM/T
Track Spot

RLM/T is a high-performance track spotlight designed to provide precise and efficient lighting solutions. Its long lifetime, decorative form, and elegant design make it ideal for modern interior applications.

Typically operated with a track-type driver, the fixture can also be supplied with a special gearbox when specific electronic components are required.

A wide range of optical options, light control elements, accessories, and light breakers are available to meet various lighting needs.

It can also be used with reflectors in gold, silver, black, and white, suitable for different purposes.



INDEX



RAL COLORS

Std.
9016

Opt.
9005
9006

RLM/T

IP20 | RoHS COMPLIANT | CE

Code	Beam Angle	Luminous Flux	System Power	Weight
RLM/T/10 NB	24°	1.180 lm	10 W	0.55 Kg
RLM/T/10 MB	38°	1.115 lm	10 W	0.55 Kg
RLM/T/10 WB	60°	1.130 lm	10 W	0.55 Kg
RLM/T/20 NB	24°	2.090 lm	20 W	0.55 Kg
RLM/T/20 MB	38°	1.970 lm	20 W	0.55 Kg
RLM/T/20 WB	60°	2.005 lm	20 W	0.55 Kg
RLM/T/30 NB	24°	2.995 lm	30 W	0.55 Kg
RLM/T/30 MB	38°	2.825 lm	30 W	0.55 Kg
RLM/T/30 WB	60°	2.880 lm	30 W	0.55 Kg

Body: Aluminum Injection
Diffuser: PMMA

Driver: Included
Voltage: 220~240 VAC

Color Temperature: 2700-3000-4000-5000-6500K
Led: COB

ACCESSORY




Honeycomb Louvre




BOX DIMENSIONS
27x18x17 cm

BOX WEIGHT
0.8 Kg


NARROW



MEDIUM



WIDE



Linear Lighting

EOSLED (SURFACE)
EOSLED (RECESSED)



EOSLED
Linear Lighting

The DFR luminaire series by EOSLED features a direct/ indirect lighting design and is available in two different widths. They can be used as single profiles up to approximately 2.5 meters in length for linear applications. The luminaires provide both direct and indirect light distribution and are suspended from the ceiling with steel wires, which can be easily adjusted using a special suspension mechanism.

INDEX



RAL COLORS

Std.

9016

Opt.

9005

9006

DFR20

IP20 | RoHS COMPLIANT | CE

Code	Luminous Flux	System Power	Weight
DFR20 / 50	625 lm	7.5 W	0.15 Kg
DFR20 / 100	1.250 lm	15 W	0.3 Kg
DFR20 / 120	1.550 lm	17.5 W	0.4 Kg
DFR20 / 150	1.850 lm	20 W	0.5 Kg

Body: Aluminum extrusion
Diffuser: Opal
Driver: Included

Beam Angle: 100°
Voltage: 220~240VAC

Color Temperature: 2700-3000-4000-5000-6500K
Led: Mid Power



Code	a	b	c
DFR 20/100	1024 mm	19 mm	16 mm
DFR 20/120	1194 mm	19 mm	16 mm
DFR 20/150	1528 mm	19 mm	16 mm


Can be produced in multiples of 5 cm

BOX DIMENSIONS


DFR20/100 105x5x5cm
DFR20/120 125x5x5cm
DFR20/150 155x5x5cm

BOX WEIGHT

DFR20/100 0.5 Kg
DFR20/120 0.6 Kg
DFR20/150 0.7 Kg



RAL COLORS
Std.
9016
Opt.
9005
9006

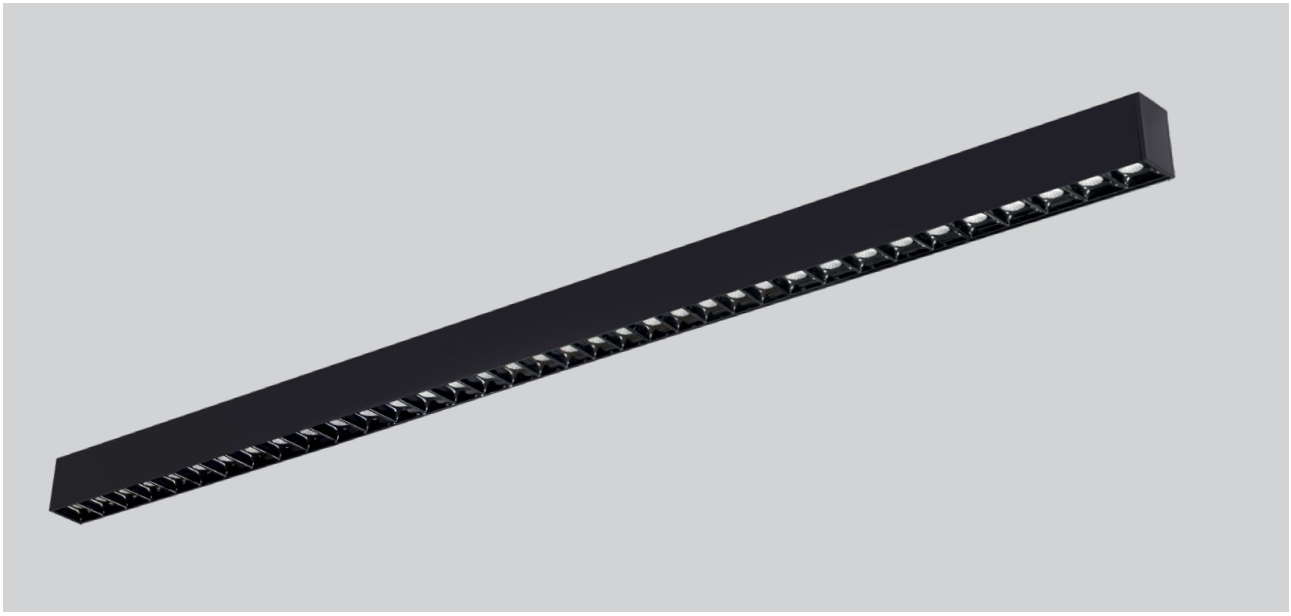

DFR30

IP20 | RoHS COMPLIANT | CE


Code	Luminous Flux	System Power	Weight
DFR30/B/120	2.850 lm	30W	1.5 Kg
DFR30/W/120	2.850 lm	30W	1.5 Kg
DFR30/O/120	3.000 lm	35W	1.45 Kg

Body: Aluminum extrusion
Diffuser: Opal
Reflector: PMMA

Beam Angle: 100°
Voltage: 220~240VAC
Driver: Included

Color Temperature: 2700-3000-4000-5000-6500K
Led: Mid Power

DFR30/O



Opal Diffuser

ACCESSORY




Honeycomb Louvre




Code	a	b	c
DFR 30/B/120	1198 mm	35 mm	52 mm
DFR 30/W/120	1198 mm	35 mm	52 mm
DFR 30/O/120	1198 mm	35 mm	52 mm

REFLECTOR TYPES




Black and White

DFR30/B
DFR30/W




DFR30/O



BOX DIMENSIONS
DFR30/120 15x8x130 cm

BOX WEIGHT
DFR30/120 1.75 kg

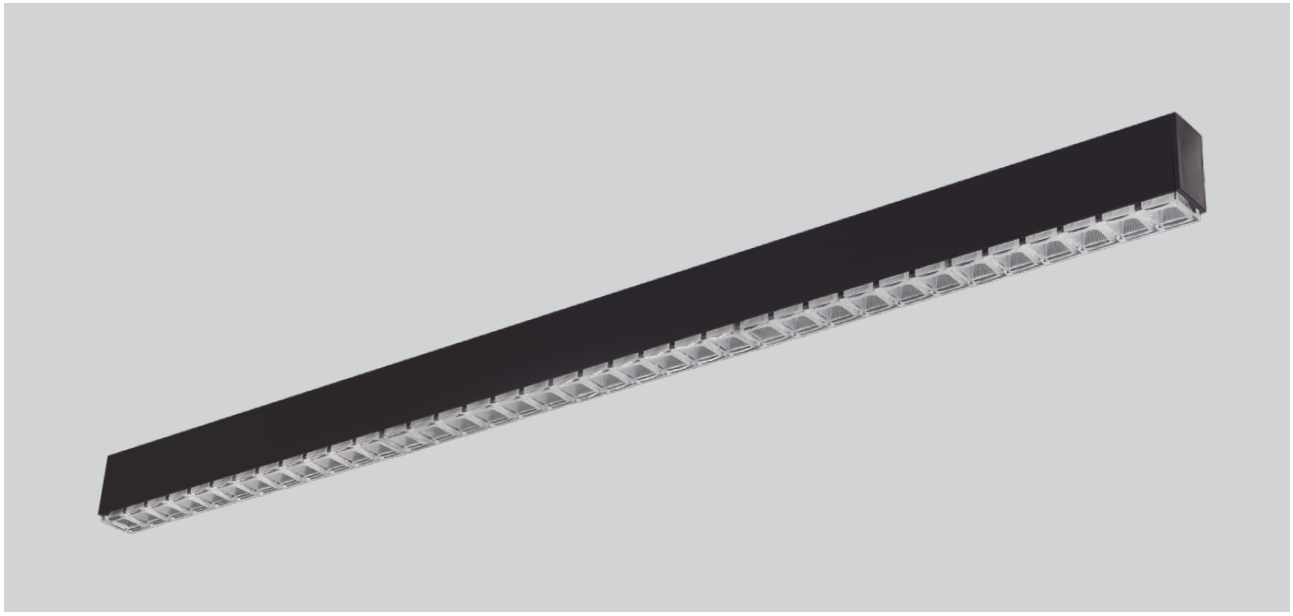

RAL COLORS

Std.

9016

Opt.

9005

9006

DFR30/L

IP20 | RoHS COMPLIANT | CE

Code	Luminous Flux	System Power	Weight
DFR30/L/60	1.800 lm	20W	1 Kg
DFR30/L/120	3.600 lm	40W	1.8 Kg

Body: Aluminum extrusion
Lens: PMMA

Driver: Included
Voltage: 220~240VAC

Color Temperature: 2700-3000-4000-5000-6500K
Led: Mid Power



Code	a	b	c
DFR 30/L60	635 mm	35 mm	60 mm
DFR 30/120	1262 mm	35 mm	60 mm

BOX DIMENSIONS
DFR30/L/60 15x8x70 cm
DFR30/L/120 15x8x130 cm

BOX WEIGHT
DFR30/L/60 1.2kg
DFR30/L/120 2.1kg

RAL COLORS
Std.
9016
Opt.
9005
9006



DFR60

IP 20 54 | RoHS COMPLIANT | CE

Code	Luminous Flux	System Power	Weight
DFR60 / 100	2.800 lm	30 W	3.00 Kg
DFR60 / 120	3.360 lm	35 W	3.75 Kg
DFR60 / 150	4.200 lm	45 W	4.50 Kg

Body: Aluminum Extrusion
Diffuser: Opal
Driver: Included

Beam Angle: 100°
Voltage: 220~240VAC

Color Temperature: 2700-3000-4000-5000-6500K
Led: Mid Power

ACCESSORY
Honeycomb Louvre






Code	a	b	c
DFR 60/60	615 mm	60 mm	90 mm
DFR 60/100	1020 mm	60 mm	90 mm
DFR 60/120	1210 mm	60 mm	90 mm
DFR 60/150	1520 mm	60 mm	90 mm

BOX DIMENSIONS
DFR60/100 15x8x110 cm
DFR60/120 15x8x130 cm
DFR60/150 15x8x160 cm

BOX WEIGHT
DFR60/100: 3.8 kg
DFR60/120: 4.1 kg
DFR60/150: 4.8 kg








EOSLED

Recessed Linear Lighting

The DFG luminaire series by EOSLED features a recessed-type design suitable for use in recessed ceilings. They can be used as single profiles up to approximately 2.5 meters in length for linear applications and can be connected end-to-end to create a continuous light line. A ceiling mounting apparatus ensures firm attachment of the luminaire frame to the ceiling edges. The light emitted from the LED source creates a soft and pleasant atmosphere as it passes through the opal diffuser.

INDEX

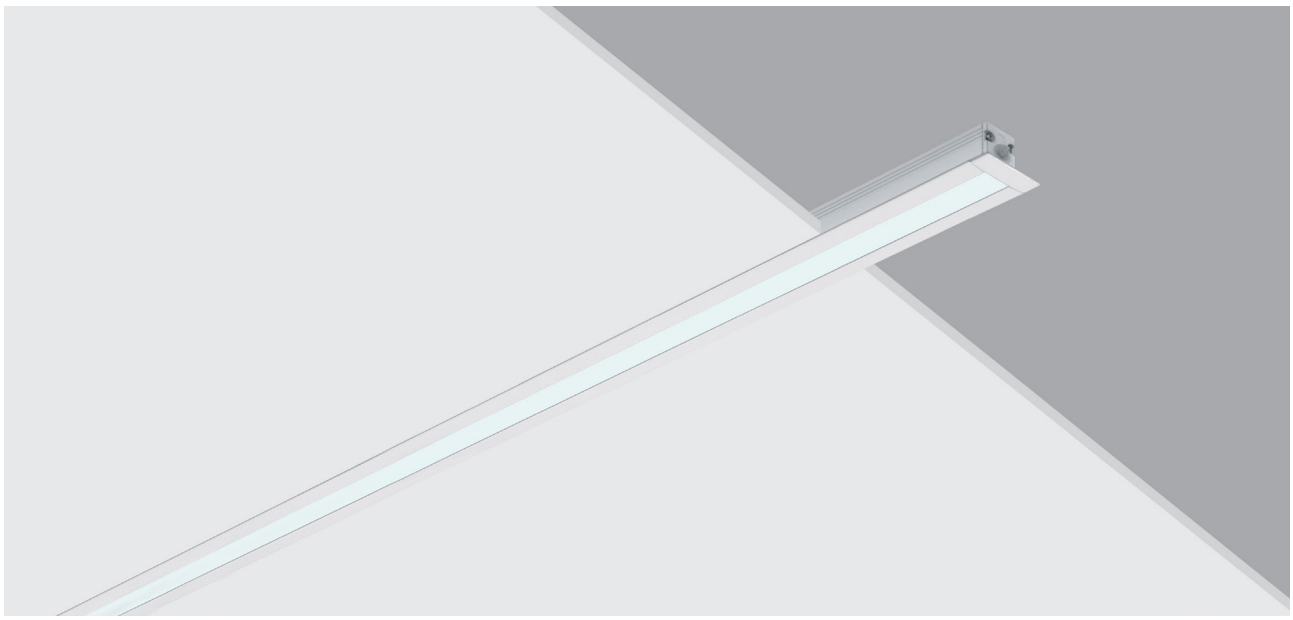

RAL COLORS

Std.

9016

Opt.

9005

9006

DFG20


IP20 40 | RoHS COMPLIANT | CE

Code	Luminous Flux	System Power	Weight
DFG20 / 50	625 lm	7.5 W	0.25 Kg
DFG20 / 100	1.250 lm	15 W	0.50 Kg
DFG20 / 120	1.550 lm	17.5 W	0.60 Kg
DFG20 / 150	1.850 lm	20 W	0.75 Kg

Body: Aluminum Extrusion
Diffuser: Opal
Driver: Included

Beam Angle: 100°
Voltage: 220~240VAC

Color Temperature: 2700-3000-4000-5000-6500K
Led: Mid Power




Code	a	b	c
DFG 20/50	511 mm	35 mm	16 mm
DFG 20/100	1010 mm	35 mm	16 mm
DFG 20/120	1208 mm	35 mm	16 mm
DFG 20/150	1505 mm	35 mm	16 mm


BOX DIMENSIONS
DFR20/100: 105x5x5cm
DFR20/120: 125x5x5cm
DFR20/150: 155x5x5cm

KG

BOX WEIGHT
DFR20/100: 0.5 Kg
DFR20/120: 0.6 Kg
DFR20/150: 0.7 Kg



RAL COLORS
Std.
9016
Opt.
9005
9006

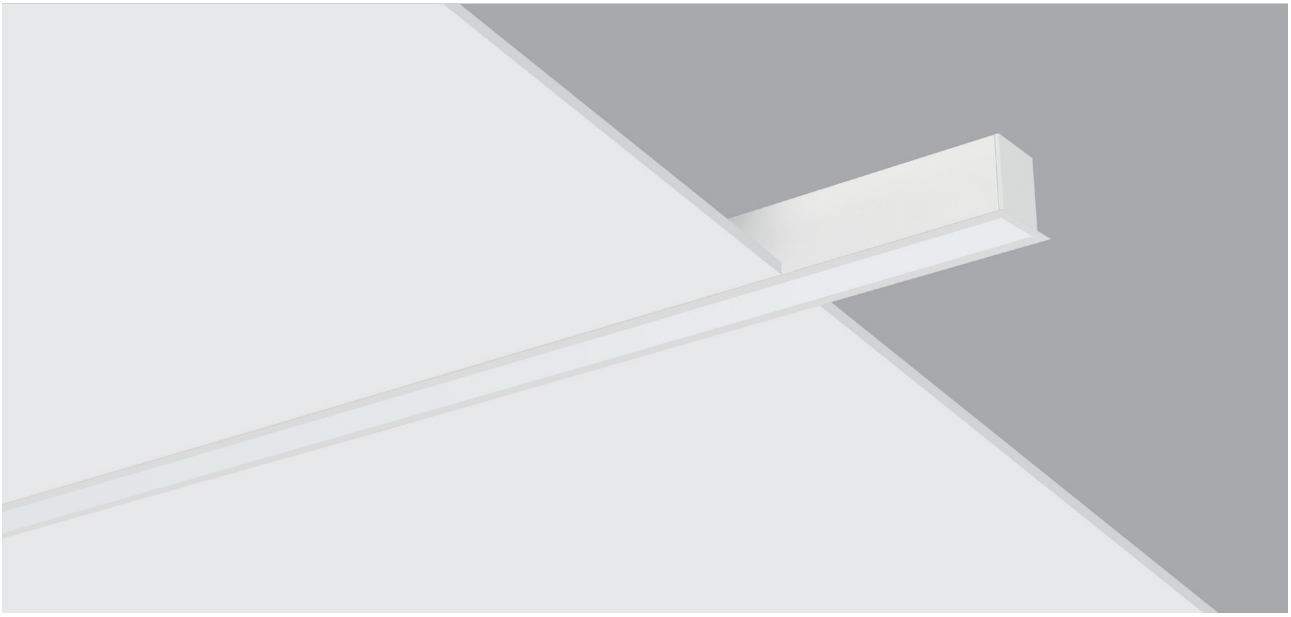

DFG30

IP20 | RoHS | CE

Code	Luminous Flux	System Power	Weight
DFG30 / 100	2.300 lm	27W	1.25 Kg
DFG30 / 120	3.000 lm	35W	1.45 Kg
DFG30 / 150	3.550 lm	42W	1.75 Kg

Body: Aluminum Extrusion
Diffuser: Opal
Driver: Included

Beam Angle: 100°
Voltage: 220~240VAC


Color Temperature: 2700-3000-4000-5000-6500K
Led: Mid Power




Code	a	b	c
DFG 30/100	956 mm	46 mm	52 mm
DFG 30/120	1220 mm	46 mm	52 mm
DFG 30/150	1484 mm	46 mm	52 mm

BOX DIMENSIONS
DFG30/100 15x8x110 cm
DFG30/120 15x8x130 cm
DFG30/150 15x8x160 cm

BOX WEIGHT
DFG30/100 1.5 kg
DFG30/120 1.75 kg
DFG30/150 2.0 kg



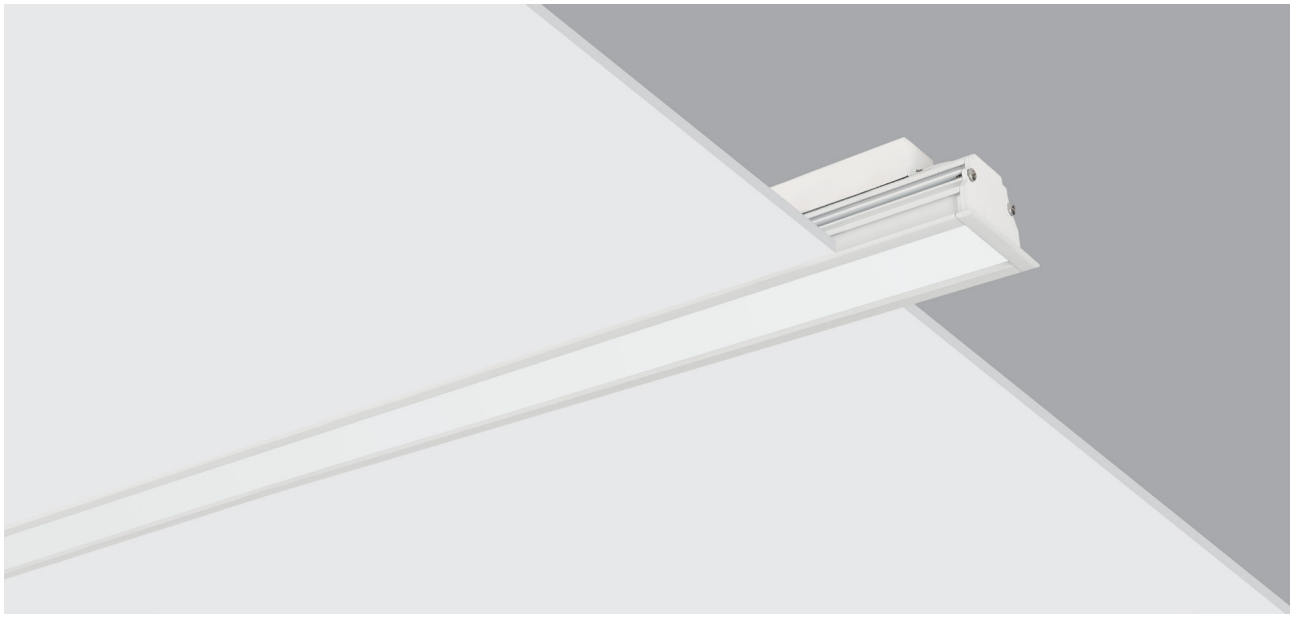

RAL COLORS

Std.

9016

Opt.

9005

9006

DFG50

IP20 RoHS CE

Code	Luminous Flux	System Power	Weight
DFG50 / 50	1.400 lm	15 W	1.0 Kg
DFG50 / 100	2.800 lm	30 W	1.9 Kg
DFG50 / 120	3.360 lm	35 W	2.3 Kg
DFG50 / 150	4.200 lm	45 W	2.7 Kg

Body: Aluminum Extrusion
Diffuser: Opal
Driver: Included

Beam Angle: 100°
Voltage: 220~240 VAC


Color Temperature: 2700-3000-4000-5000-6500K
Led: Mid Power



Code	a	b	c
DFG 50/50	530 mm	73 mm	83 mm
DFG 50/100	1030 mm	73 mm	83 mm
DFG 50/120	1220 mm	73 mm	83 mm
DFG 50/150	1530 mm	73 mm	83 mm

BOX DIMENSIONS
DFG50/100 15x8x110 cm
DFG50/120 15x8x130 cm
DFG50/150 15x8x160 cm

BOX WEIGHT
DFG50/100 2.1 kg
DFG50/120 2.5 kg
DFG50/150 3.0 kg



Recessed Luminaires

OFISLED
LEG
LGO
MOON
FNSB



OFİSLED

Recessed Luminaires

OFİSLED has been developed to bring advanced LED technology into office lighting. It can be produced for all types of suspended ceilings, with manufacturing customized according to the brand and model of the ceiling system to be used.

In the optical design of the fixture, glare and screen reflections—the most critical factors in office environments—have been carefully considered, and Cat-1 and Cat-2 types have been developed accordingly.

INDEX



RAL COLORS
Std. 9016
Opt. 9005 9006

LGS

IP20 | RoHS COMPLIANT | CE

Code	Luminous Flux	System Power	Weight
LGS60-60/3	3.000 lm	27 W	5 Kg
LGS60-60/4	3.900 lm	35 W	5 Kg
LGS30-120/2	5.200 lm	52 W	5.5 Kg

Body: 0.6mm thick DKP sheet steel
Reflector: Alanod Miro Silver Aluminum
Diffuser: 2.8 mm thick microprismatic lens

Optic: Cat1, Cat2
Voltage: 220~240 VAC
Driver: Included

Color Temperature: 2700-3000-4000-5000-6500K
Led: Mid Power




LGS/2 LGS/3 LGS/4

Optics




Prismatic Opal



	Code	a	b	Cut-Out
GYPSUM	LGS001 30-60	295 mm	595 mm	280x580 mm
	LGS001 60-60	595 mm	595 mm	580x580 mm
	LGS001 30-120	295 mm	1195 mm	280x1.180 mm
CLIP-IN	LGS002 30-60	299 mm	599 mm	-
	LGS002 60-60	599 mm	599 mm	-
	LGS002 30-120	299 mm	1199 mm	-
MODULAR	LGS300 30-60	295 mm	595 mm	-
	LGS300 60-60	595 mm	595 mm	-
	LGS300 30-120	295 mm	1195 mm	-

BOX DIMENSIONS
LGS 60-60 67x61x9cm
LGS 30-120 32x122x9cm

BOX WEIGHT
5.5 kg
6 kg






LEG
Recessed Luminaires

Glare and screen reflections have been taken into consideration in the optical design of the LEG series fixtures which are direct-indirect fixtures which are the most important requirements in offices. The fixture has been developed in direct - indirect mixed optical structure according to Cat-1 and Cat-2 types. The fixture is produced in different optical structures as double parabolic and opal. It is designed to be used in a suitable way in any office perfectly.

INDEX

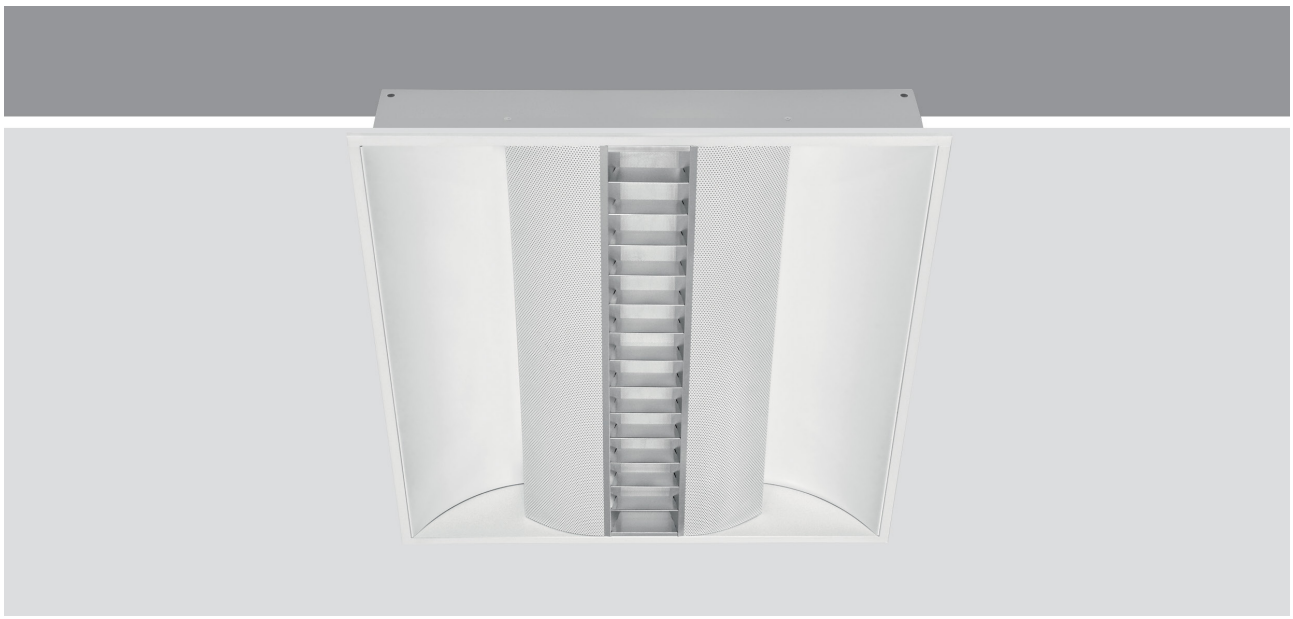

RAL COLORS
Std.
9016
Opt.
9005
9006

LEG-PR


IP20 | RoHS COMPLIANT | CE

Code	Luminous Flux	System Power	Weight
LEG-PR/25	1700 lm	25 W	4.9 Kg
LEG-PR/35	2280 lm	35 W	4.9 Kg

Body: DKP sheet metal
Reflector: DKP sheet metal
Lamella: Aluminum

Beam Angle: 124°
Voltage: 220~240 VAC
Driver: Included


Color Temperature: 2700-3000-4000-5000-6500K
Led: Mid Power

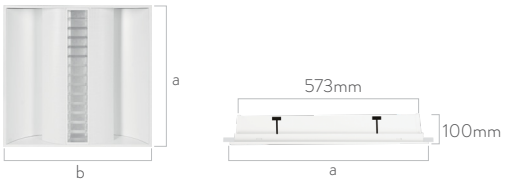

	Code	a	b	Cut-Out
GYPSUM	LEG-PR	595 mm	595 mm	580x580 mm
CLIP-IN	LEG-PR	599 mm	599 mm	-
MODULAR	LEG-PR	595 mm	595 mm	-

BOX DIMENSIONS
61x67x12 cm

BOX WEIGHT
5.2 kg





RAL COLORS
Std.
9016
Opt.
9005
9006

LEG-OP


IP20 | RoHS COMPLIANT | CE

Code	Luminous Flux	System Power	Weight
LEG-OP/26	1490 lm	26 W	5.1 Kg
LEG-OP/38	2120 lm	38 W	5.1 Kg

Body: DKP sheet metal
Reflector: DKP sheet metal
Driver: Included

Beam Angle: 115 °
Voltage: 220~240 VAC


Color Temperature: 2700-3000-4000-5000-6500K
Led: Mid Power

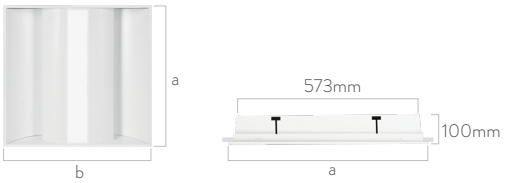

	Code	a	b	Cut-Out
GYPSUM	LEG-OP	595 mm	595 mm	580x580 mm
CLIP-IN	LEG-OP	599 mm	599 mm	-
MODULAR	LEG-OP	595 mm	595 mm	-

BOX DIMENSIONS
61x67x12 cm

BOX WEIGHT
5.4 kg







LGO
Recessed Luminaires

This is a fixture model with a wide usage and application. The light coming from multiple LED sources in LGO fixtures passes through the opal diffuser of and provides an extremely soft and homogeneous distribution to the environment. Production for all types of suspended ceilings is possible.

Therefore, production is made according to the brand/ model of the suspended ceiling to be used. This fixture, like all Litpa fixtures is highly efficient and economical.

INDEX



RAL COLORS

Std.
9016

Opt.
9005
9006

LGO60

IP20 | RoHS COMPLIANT | CE


Code	Luminous Flux	System Power	Voltage Range	Weight
LGO60-60/20	2.100 lm	20 W	220~240 VAC	4.5 Kg
LGO60-60/30	3.300 lm	30 W	220~240 VAC	4.5 Kg
LGO60-60/35	4.000 lm	35 W	220~240 VAC	4.5 Kg
LGO60-60/40	4.350 lm	40 W	220~240 VAC	4.5 Kg
LGO60-60/45	4.600 lm	45 W	220~240 VAC	4.5 Kg

HCL

Body: DKP sheet metal
Diffuser: Opal
Driver: Included

Beam Angle: 115°
Led: Mid Power


Color Temperature: 2700-3000-4000-5000-6500K
TunableWhite

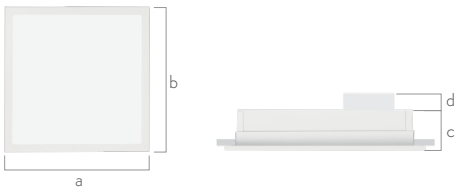

	Code	a	b	c	d	Cut-Out
GYPSUM	LGO60-60	595 mm	595 mm	60 mm	30 mm	580x580 mm
GYPSUM	LGO60-120	595 mm	1195 mm	60 mm	30 mm	580x1180 mm
CLIP-IN	LGO60-60	599 mm	599 mm	60 mm	30 mm	-
CLIP-IN	LGO60-120	599 mm	1199 mm	60 mm	30 mm	-
MODULAR	LGO60-60	595 mm	595 mm	60 mm	30 mm	-
MODULAR	LGO60-120	95 mm	1195 mm	60 mm	30 mm	-

BOX DIMENSIONS
65x64x14 cm

BOX WEIGHT
5 kg






RAL COLORS
Std.
9016
Opt.
9005
9006

LGO30

IP20 | RoHS COMPLIANT | CE

Code	Luminous Flux	System Power	Voltage Range	Weight
LGO30-30/18	1.950lm	18 W	220~240 VAC	1.4Kg
LGO30-60/18	1.950lm	18 W	220~240 VAC	2.5 Kg
LGO30-120/27	2.900lm	27 W	220~240 VAC	4.5 Kg
LGO30-120/35	3.900lm	35 W	220~240 VAC	4.5 Kg


Body: DKP sheet metal
Diffuser: Opal
Beam Angle: 115°
Driver: Included
Color Temperature: 2700-3000-4000-5000-6500K
Led: Mid Power

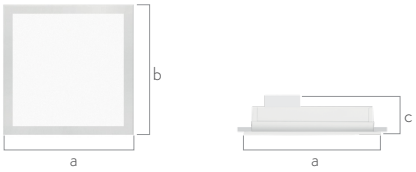

	Code	a	b	c	Cut-Out
GYPSUM	LGO30-30	295 mm	295 mm	90mm	280x280 mm
GYPSUM	LGO30-60	295 mm	595 mm	90mm	280x580 mm
GYPSUM	LGO30-120	295 mm	1195 mm	90mm	280x1180 mm
CLIP-IN	LGO30-30	299 mm	299 mm	90mm	-
CLIP-IN	LGO30-60	299 mm	599 mm	90mm	-
CLIP-IN	LGO30-120	299 mm	1199 mm	90mm	-
MODULAR	LGO30-30	295 mm	295 mm	90mm	-
MODULAR	LGO30-60	295 mm	595 mm	90mm	-
MODULAR	LGO30-120	295 mm	1195 mm	90mm	-

BOX DIMENSIONS
LGO30-30 35X35x14 cm
LGO30-60 35X65x14 cm
LGO30-120 35X125x14 cm

BOX WEIGHT
LGO30-30 2 Kg
LGO30-60 3 Kg
LGO30-120 5 Kg





RAL COLORS

Std.

9016

Opt.

9005

9006

LGO/P (Microprismatic)


IP20 40 | RoHS COMPLIANT | CE

Code	Luminous Flux	System Power	Voltage Range	Weight
LGO/P60-60/20	1.700 lm	20 W	220~240 VAC	4.5 Kg
LGO/P60-60/30	2.550 lm	30 W	220~240 VAC	4.5 Kg
LGO/P60-60/35	2.975lm	35 W	220~240 VAC	4.5 Kg
LGO/P60-60/40	3.400 lm	40 W	220~240 VAC	4.5 Kg
LGO/P60-60/45	3.825 lm	45 W	220~240 VAC	4.5 Kg


Body: DKP sheet metal

Diffuser: Micro-prismatik+opal
Driver: Included

Color Temperature: 2700-3000-4000-5000-6500K
Led: Mid Power

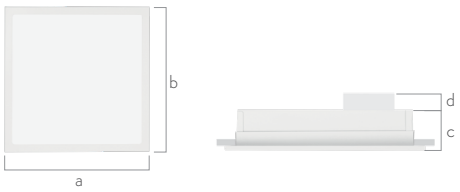

	Code	a	b	c	d	Cut-Out
GYPSUM	LGO60-60	595 mm	595 mm	60 mm	30 mm	580x580 mm
GYPSUM	LGO60-120	595 mm	1195 mm	60 mm	30 mm	580x1180 mm
CLIP-IN	LGO60-60	599 mm	599 mm	60 mm	30 mm	-
CLIP-IN	LGO60-120	599 mm	1199 mm	60 mm	30 mm	-
MODULAR	LGO60-60	595 mm	595 mm	60 mm	30 mm	-
MODULAR	LGO60-120	95 mm	1195 mm	60 mm	30 mm	-





RAL COLORS
Std.
9016
Opt.
9005
9006


LGO-WP

IP54 | RoHS COMPLIANT | CE

Code	Luminous Flux	System Power	Voltage Range	Weight
LGO/WP 60/20	2.100 lm	20 W	220~240 VAC	4.5 Kg
LGO/WP 60/30	3.300 lm	30 W	220~240 VAC	4.5 Kg
LGO/WP 60/35	4.000 lm	35 W	220~240 VAC	4.5 Kg
LGO/WP 60/40	4.350 lm	40 W	220~240 VAC	4.5 Kg
LGO/WP 60/45	4.600 lm	45 W	220~240 VAC	4.5 Kg

HCL


Body: DKP sheet metal
Diffuser: Opal
Beam Angle: 115°
Driver: Included
Color Temperature: 2700-3000-4000-5000-6500K, TW
Led: Mid Power

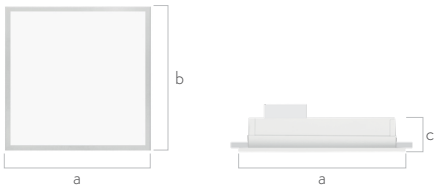


	Code	a	b	c	d	Cut-Out
GYPSUM	LGO/WP 60-60	595 mm	595 mm	60mm	30mm	580x580 mm
GYPSUM	LGO/WP 30-30	295 mm	295 mm	60mm	30mm	280x280 mm
CLIP-IN	LGO/WP 60-60	599 mm	599 mm	60mm	30mm	-
CLIP-IN	LGO/WP 30-30	299 mm	299 mm	60mm	30mm	-
MODULAR	LGO/WP 60-60	595 mm	595 mm	60mm	30mm	-
MODULAR	LGO/WP 30-30	295 mm	295 mm	60mm	30mm	-

BOX DIMENSIONS
65x64x14 cm

BOX WEIGHT
7 kg



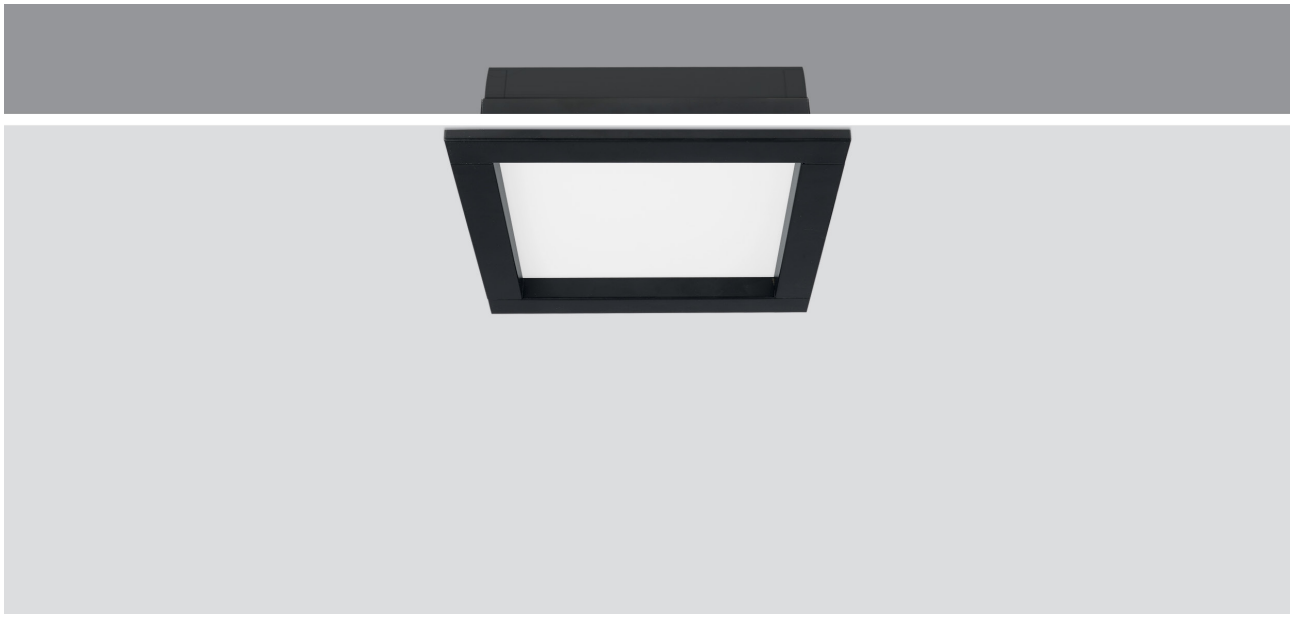

RAL COLORS

Std.
9016

Opt.
9005
9006

LGO MINI

IP20 40 | RoHS COMPLIANT | CE


Code	Luminous Flux	System Power	Voltage Range	Weight
LGO 15	1.600 lm	15 W	220~240 VAC	0.4 Kg
LGO 20	1.950 lm	20 W	220~240 VAC	0.5 Kg

Body: DKP sheet metal
Diffuser: Opal


Beam Angle: 105°
Driver: Included

Color Temperature: 2700-3000-4000-5000-6500K
Led: Mid Power

LGO 20

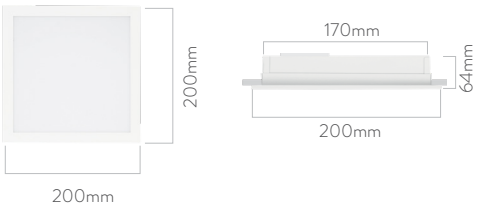


LGO 15

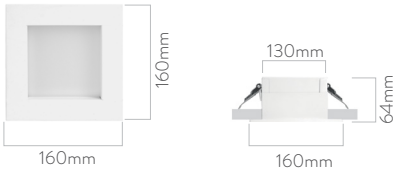

BOX DIMENSIONS
25x25x7 cm

BOX WEIGHT
1 kg





MOON
Recessed Luminaires

Moon fixtures offer a high-efficiency lighting option with rounded and elegant forms. They can be used individually or arranged side by side or in multiple configurations to create a distinctive ambiance in any space. Thanks to their modern design, they easily adapt to various interior concepts and provide a lighting solution that is both aesthetic and functional.



RAL COLORS

Std.
9016

Opt.
9005
9006

OLG

IP20 | RoHS COMPLIANT | CE


Code	Beam Angle	Luminous Flux	System Power	Weight
OLG 60/27	120°	2.300 lm	27 W	5.2 Kg
OLG 60/35	120°	3.050 lm	35 W	5.2 Kg

Body: DKP sheet steel
Diffuser: Opal

Driver: Included
Voltage: 220~240 VAC

Color Temperature: 2700-3000-4000-5000-6500K
Led: Mid Power


Desired patterns can be created upon request

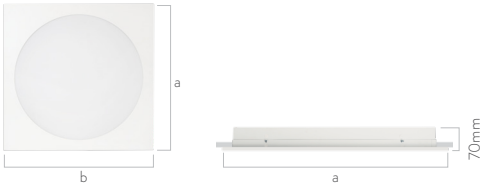

	Code	a	b	Cut-Out
GYPSUM	OLG 60	595 mm	595 mm	580x580 mm
CLIP-IN	OLG 60	599 mm	599 mm	-
MODULAR	OLG 60	595 mm	595 mm	-

BOX DIMENSIONS
62x62x10 cm

BOX WEIGHT
5.5 kg




FNSB
Recessed Luminaires



The FNSB series luminaires are designed in square and circular forms for mounting in suspended ceilings, enabling soft lighting applications. Thanks to the high-efficiency LEDs used, they provide significant energy savings. They offer practical solutions with their compatibility with different types of suspended ceilings as well as various power range options.

INDEX

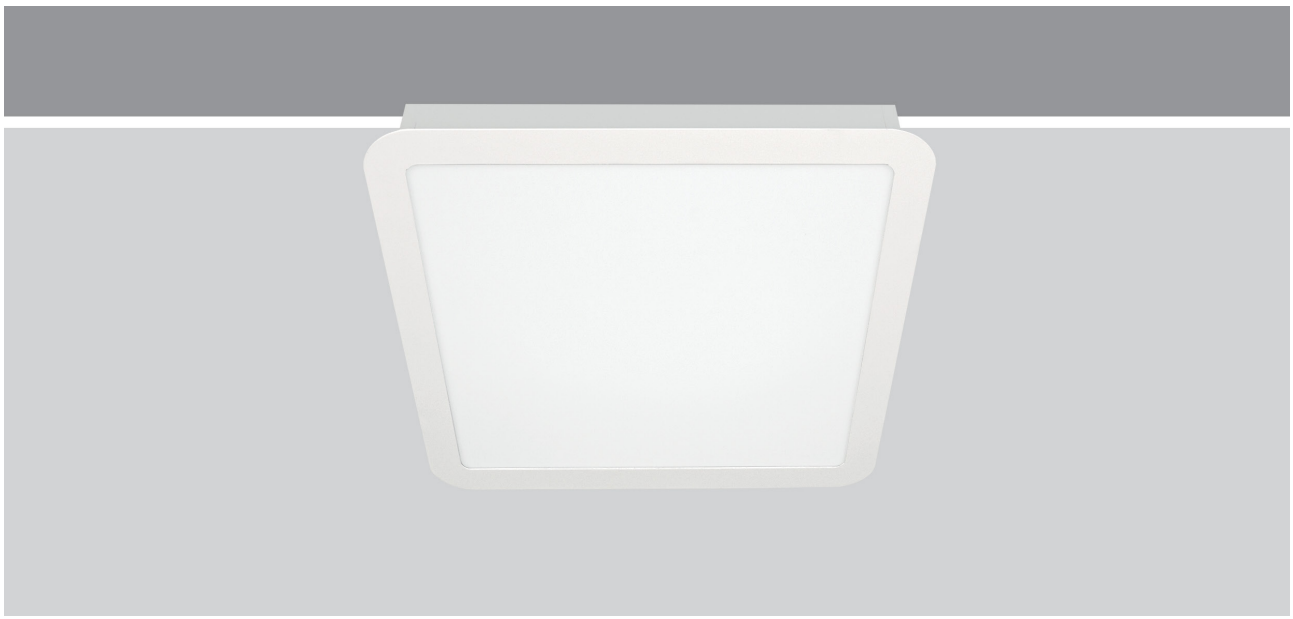

RAL COLORS

Std.
9016

Opt.
9005
9006

FNSB-K


IP20 | RoHS COMPLIANT | CE

Code	Luminous Flux	System Power	Weight
FNSB-K 20	960 lm	10 W	2 Kg
FNSB-K 20	1.790 lm	20 W	2 Kg
FNSB-K 40	1.990 lm	30 W	3 Kg
FNSB-K 40	2.680 lm	40 W	3 Kg

Body: DKP sheet metal
Diffuser: Opal
Driver: Included

Beam Angle: 110°
Voltage: 220~240 VAC


Color Temperature: 2700-3000-4000-5000-6500K
Led: Mid Power

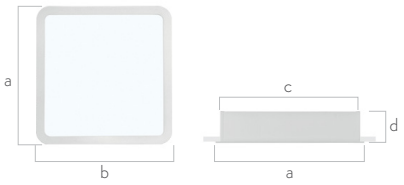


Code	a	b	c	d	Cut-Out
FNSB-K 20	200mm	200mm	169mm	82mm	175x175 mm
FNSB-K 40	400 mm	400mm	369mm	82mm	375x375 mm

BOX DIMENSIONS
FNSB-K/20 22x22x10 cm
FNSB-K/40 42x42x10 cm

BOX WEIGHT
FNSB-K/20 2.4 kg
FNSB-K/40 3.4 kg



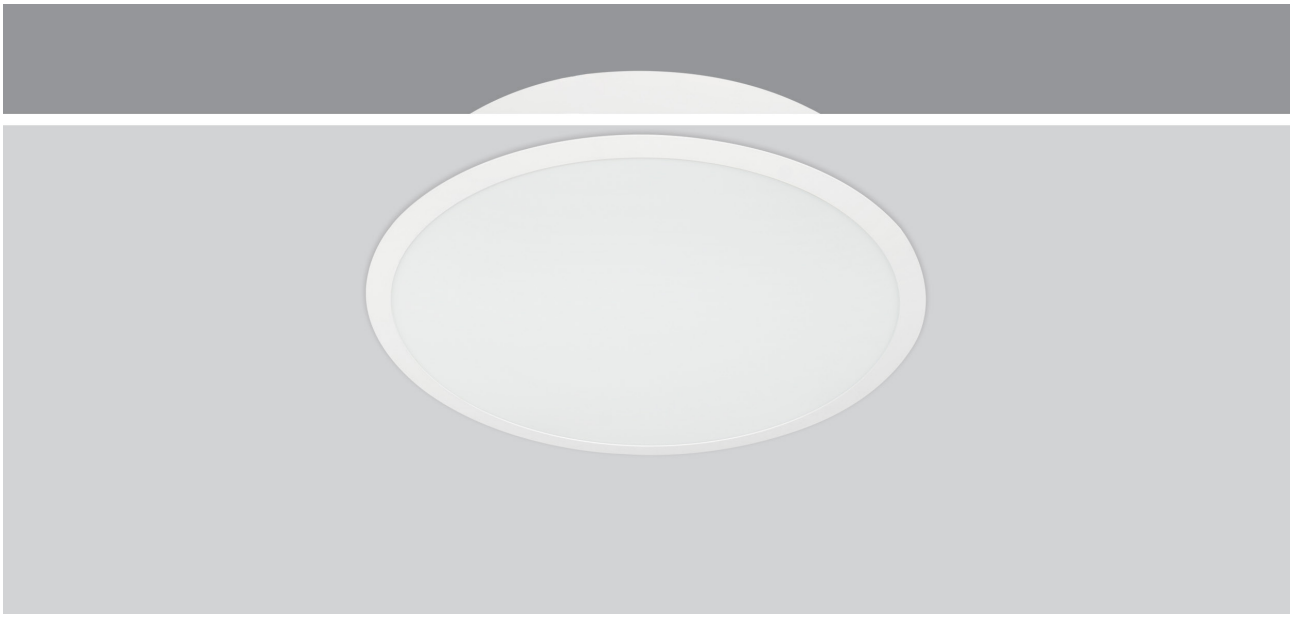

RAL COLORS
Std.
9016
Opt.
9005
9006

FNSB-Y


IP20 | RoHS COMPLIANT | CE

Code	Luminous Flux	System Power	Weight
FNSB-Y 25-17	1.800 lm	17 W	2 Kg
FNSB-Y 25-24	2.530 lm	24 W	2 Kg
FNSB-Y 35-22	1.650 lm	22 W	3 Kg
FNSB-Y 35-30	3.160 lm	30 W	3 Kg
FNSB-Y 55-40	3.510 lm	40 W	6.5 Kg

Body: DKP sheet metal
Diffuser: Opal
Driver: Included

Beam Angle: 112°
Voltage: 220~240 VAC


Color Temperature: 2700-3000-4000-5000-6500K
Led: Mid Power

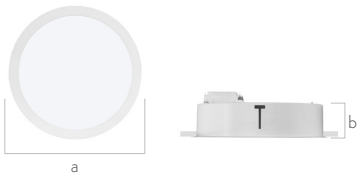

Code	a	b	Cut-Out
FNSB-Y 25	250 mm	82 mm	∅ 238mm
FNSB-Y 35	350 mm	82 mm	∅ 338 mm
FNSB-Y 55	550 mm	82 mm	∅ 527 mm

BOX DIMENSIONS
FNSB-Y/25 27x27x10 cm
FNSB-Y/35 37x37x10 cm
FNSB-Y/55 57x57x10 cm


BOX WEIGHT
FNSB-Y/25 2.2 kg
FNSB-Y/35 3.4 kg
FNSB-Y/55 6.8 kg





Surface Mounted Luminaires

LSS
LSO
FNSS/Y
SLO
SCP

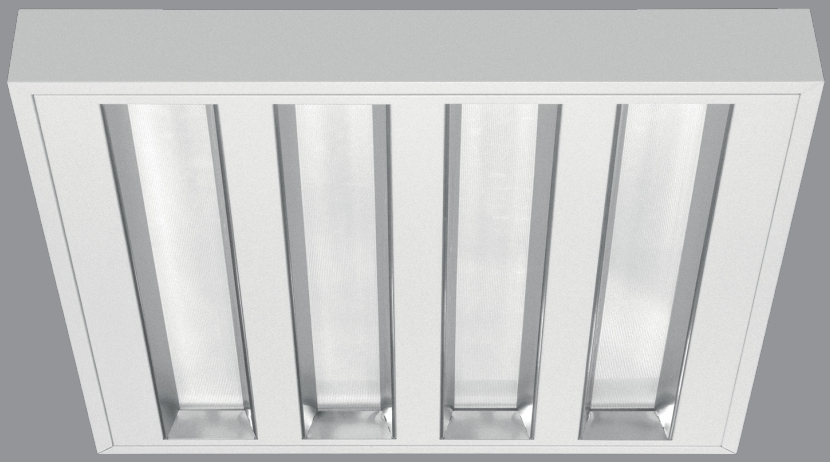

LSS

Surface-Mounted Luminaires

LSS luminaires, a surface-mounted lighting series, offer a complete solution for spaces such as offices where glare control is essential. By improving light quality in the working environment, they help maximize employee productivity. The luminaires are available with 2-, 3-, or 4-louvre options, depending on the desired light output. Thanks to the use of high-quality materials, they provide excellent performance and significant energy savings.

INDEX



RAL COLORS

Std. 9016

Opt. 9005 9006

LSS

IP20 RoHS CE

Code	Luminous Flux	System Power	Weight
LSS 60-60/3	3.000 lm	27 W	5.5 Kg
LSS 60-60/4	3.900 lm	35 W	5.7 Kg
LSS 30-30/2	2.350 lm	18 W	2.8 Kg
LSS 30-120/2	3.000 lm	27 W	5.8 Kg

Body: DKP sheet steel
Diffuser: Microprismatic lens
Reflector: Aluminum

Beam Angle: 70°
Voltage: 220~240 VAC
Driver: Included

Color Temperature: 2700-3000-4000-5000-6500K
Led: Mid Power




LSS/2 LSS/3 LSS/4

Optics



Prismatic Opal

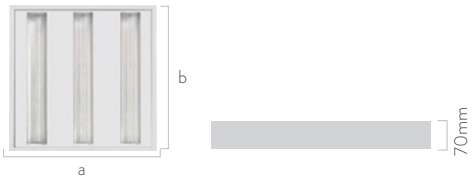


Code	a	b
LSS 60-60/4	600 mm	600 mm
LSS 60-60/3	600 mm	600 mm
LSS 30-30/2	300 mm	300 mm
LSS 30-120/2	300 mm	1200mm

BOX DIMENSIONS

LSS 60-60/4	67x61x9cm
LSS 60-60/3	67x61x9cm
LSS 30-30/2	37x31x9cm
LSS 30-120/2	127x31x9cm

BOX WEIGHT

LSS/60-60/4	6 kg
LSS/60-60/3	5.8 kg
LSS/30-30	3.1 kg
LSS/30-120	6.1 kg






LSO
Surface-Mounted Luminaires

LSO luminaires, which have a lot of usage areas, are used in the places where there are no opportunities of recessed ceiling by installing onto the surface.

They are produced with the shape square and rectangle according to the needs and meets various power requirements. They are produced with the understanding of eye-pleasing simple, stylish structure and high quality production.



INDEX

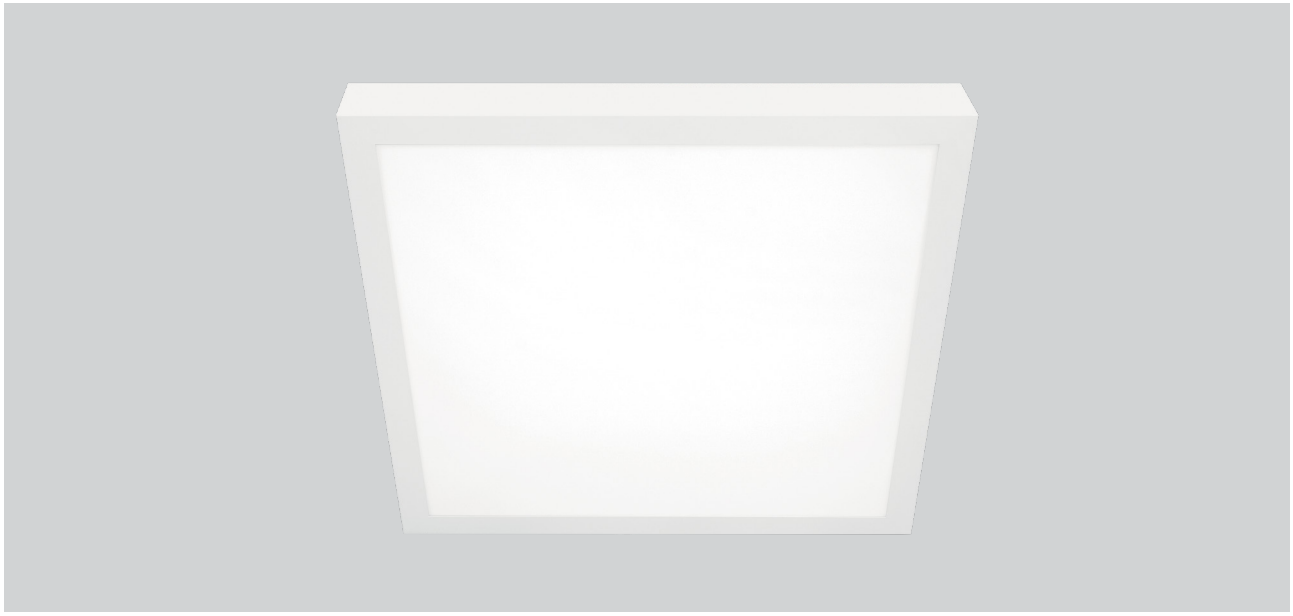

RAL COLORS

Std.

9016

Opt.

9005

9006

LSO

IP20 | RoHS COMPLIANT | CE


Code	Luminous Flux	System Power	Weight
LSO 60-60/30	3.300 lm	30 W	5.1 Kg
LSO 60-60/35	4.000 lm	35 W	5.1 Kg
LSO 60-60/40	4.350 lm	40 W	5.1 Kg
LSO 30-30	2.200 lm	20 W	2 Kg
LSO 30-120	3.850 lm	35 W	5 Kg

HCL

Body: DKP sheet steel
Frame: DKP sheet steel
Diffuser: Opal

Driver: Included
Beam Angle: 110°
Voltage: 220~240 VAC


Color Temperature: 2700-3000-4000-5000-6500K, TW
Led: Mid Power

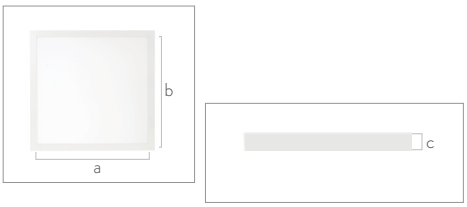

Code	a	b	c
LSO 30-30	340 mm	340 mm	80 mm
LSO 30-60	575 mm	300 mm	70 mm
LSO 60-60	625 mm	625 mm	70 mm
LSO 30-120	1150 mm	300 mm	70 mm

BOX DIMENSIONS
LSO/60-60: 65x64x14cm
LSO/30-30: 39x39x10cm
LSO/30-120: 32x122x8cm

BOX WEIGHT
LSO/60-60: 5.4 kg
LSO/30-30: 2.3 kg
LSO/30-120: 5.3 kg





FNSS/Y

Surface-Mounted Luminaires

The FNSS-Y model is a surface-mounted circular fixture with a stylish and modern appearance. Significant energy savings are achieved thanks to the advanced LED technology used, while providing high efficiency and long service life. The fixture can be manufactured in various sizes to meet different architectural and lighting requirements.



INDEX



RAL COLORS

Std.
9016

Opt.
9005
9006

FNSS/Y


IP20 | RoHS COMPLIANT | CE

Code	Luminous Flux	System Power	Weight
FNSS/Y 30	1.900 lm	20 W	1.95 Kg
FNSS/Y 40	2.320 lm	20 W	3.10 Kg
FNSS/Y 40	3.160 lm	30 W	3.10 Kg
FNSS/Y 60	3.580 lm	40 W	6.55 Kg

Body: DKP sheet metal
Diffuser: Opal
Driver: Included

Beam Angle: 115°
Voltage: 220~240 VAC


Color Temperature: 2700-3000-4000-5000-6500K
Led: Mid Power



Code	a	b
FNSS/Y 30	260 mm	100 mm
FNSS/Y 40	350 mm	100 mm
FNSS/Y 60	550 mm	100 mm
FNSS/Y 90	900 mm	100 mm

BOX DIMENSIONS
FNSS/Y/30 28x28x15 cm
FNSS/Y/40 36x36x12 cm
FNSS/Y/60 67x61x10 cm

BOX WEIGHT
FNSS/Y/30 2.3 kg
FNSS/Y/40 3.4 kg
FNSS/Y/60 6.8 kg





SCP

Surface-Mounted Luminaires

These round-shaped, surface-mounted luminaires offer a wide range of application areas thanks to their high protection class and uniform light distribution. They are available in two different height options and can be made even more functional with optional sensor and mounting kits.

INDEX



SCP

IP54 | RoHS COMPLIANT | CE

Code	Beam Angle	Luminous Flux	System Power	Weight
SCP/N 17	115°	1.360 lm	17 W	0.55 Kg
SCP/N 24	115°	2.050 lm	24 W	0.55 Kg


Body: ABS
Diffuser: Polycarbonate-Opal
Voltage: 220~240 VAC
Driver: Included
Color Temperature: 2700-3000-4000-5000-6500K
Led: Mid Power



KIT + SENSOR

BOX DIMENSIONS
40x40x8 cm

BOX WEIGHT
0.75 kg



Wall Luminaires


WLS
LML
DAP
DL80
WLC
WCN
DWS



WLS
Wall-Mounted Luminaires

The WLS series consists of wall-mounted luminaires that provide double-sided illumination and can be installed either horizontally or vertically. When used together in different sizes, combining long and short versions, they enable creative and decorative lighting designs. The luminaires are particularly suitable for linear applications in corridors and hall areas.

INDEX

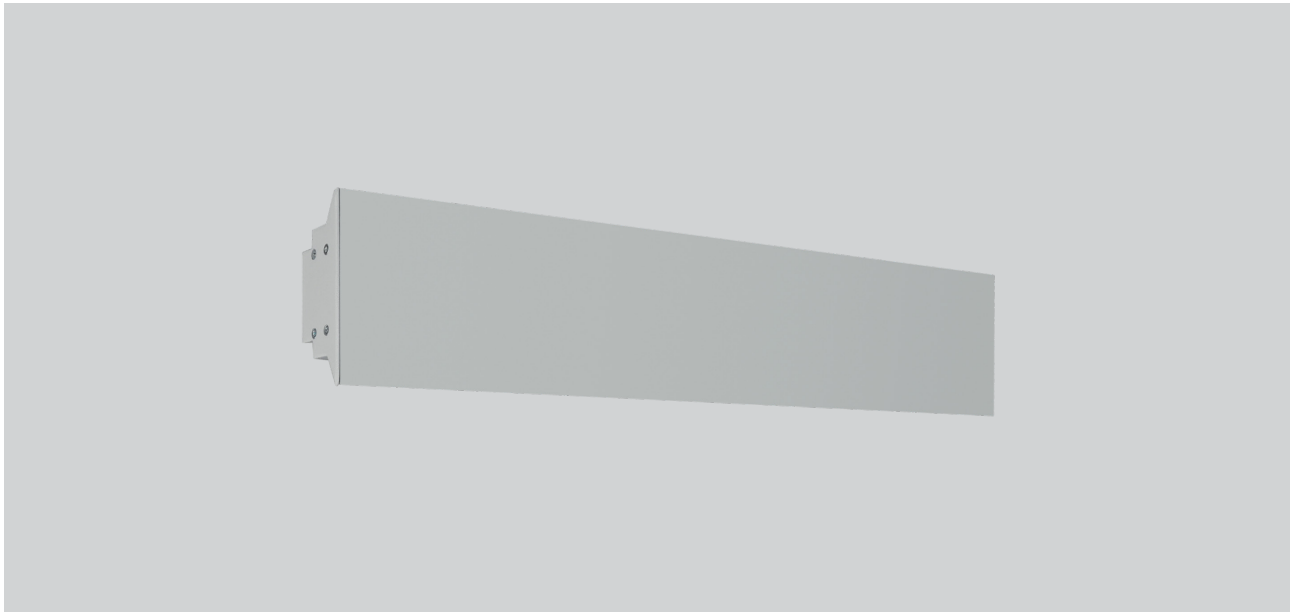

RAL COLORS
Std.
9006
Opt.
9005
9016

WLS

IP44 | RoHS COMPLIANT | CE

Code	Beam Angle	Luminous Flux	System Power	Weight
WLS100-1	120°(only Up or Down)	1.100 lm	17 W	1 Kg
WLS100-2	120°(Up and Down)	2.200 lm	34 W	1.1 Kg

Body: Aluminum Extrusion
Diffuser: Opal
Driver: Included
Voltage: 220~240 VAC
Color Temperature: 2700-3000-4000-5000-6500K
Led: Mid Power

(only Up or Down)



(Up and Down)







Code	a
WLS50	515 mm
WLS100	1010 mm

BOX DIMENSIONS
17x12x109 cm

BOX WEIGHT
1.3 kg



LML
Wall-Mounted Luminaires

The LML luminaires combine a stylish and aesthetic design with easy installation. Thanks to the opal diffuser, which provides high light output and homogeneous light distribution, they prevent glare when used above mirrors. The chrome-plated end caps offer adequate protection against ambient conditions. The luminaires are designed to be suitable for both wall and ceiling mounting.

INDEX



LML

IP44 | RoHS COMPLIANT | CE

Code	Beam Angle	Luminous Flux	System Power	Weight
LML60/10	135°	1.000 lm	10 W	1 Kg
LML60/16	135°	1.500 lm	15 W	1 Kg
LML60/20	135°	1.900 lm	20 W	1 Kg

Body: Aluminum
Diffuser: Opal

Driver: Included
Voltage: 220~240 VAC


Color Temperature: 3000-4000-5000-6500K
Led: Mid Power





BOX DIMENSIONS
10x65x10 cm

BOX WEIGHT
1.3 kg



DAP
Wall Luminaires



DAP provides impressive lighting with its decorative design, aesthetic appearance and options for single or double light direction. It provides effective lighting for vertical lines in buildings, such as columns.

INDEX



RAL COLORS
Std.
9006
Opt.
9005
9016

DAP (Direct -Indirect)

IP65 | RoHS COMPLIANT | CE

Code	Beam Angle	Luminous Flux	System Power	Weight
DAP 2x5 NB	24°	1.050 lm	10 W	1 Kg
DAP 2x5 MB	40°	990 lm	10 W	1 Kg
DAP 2x5 WB	60°	1.020 lm	10 W	1 Kg
DAP 2x10 NB	24°	1.945 lm	20 W	1 Kg
DAP 2x10 MB	40°	1.905 lm	20 W	1 Kg
DAP 2x10 WB	60°	2.080 lm	20 W	1 Kg
DAP 2x15 NB	24°	2.335 lm	30 W	1 Kg
DAP 2x15 MB	40°	2.285 lm	30 W	1 Kg
DAP 2x15 WB	60°	2.500 lm	30 W	1 Kg

Body: Aluminum extrusion
Reflector: Polycarbonate
Front Glass: 3mm thick tempered glass


Driver: Included
Voltage: 220~240 VAC

Color Temperature: 3000-4000-5000-6500K
Led: COB

ACCESSORY



Honeycomb Louvre




Dimension	On-Off	DALI
h	180 mm	240 mm


BOX DIMENSIONS
25x12x12 cm

BOX WEIGHT
1.2 kg


NARROW



MEDIUM



WIDE





RAL COLORS
Std.
9006
Opt.
9005
9016

DAP (Direct)

IP65 | RoHS COMPLIANT | CE

Code	Beam Angle	Luminous Flux	System Power	Weight
DAP 1x5 NB	24°	525 lm	5 W	0.75Kg
DAP 1x5 MB	40°	495 lm	5 W	0.75 Kg
DAP 1x5 WB	60°	510lm	5 W	0.75 Kg
DAP 1x10 NB	24°	1005 lm	10 W	0.75 Kg
DAP 1x10 MB	40°	945 lm	10 W	0.75 Kg
DAP 1x10 WB	60°	960 lm	10 W	0.75Kg
DAP 1x15 NB	24°	1520 lm	15 W	0.75 Kg
DAP 1x15 MB	40°	1420 lm	15 W	0.75 Kg
DAP 1x15 WB	60°	1440 lm	15 W	0.75 Kg

Body: Aluminum extrusion
Diffuser: Polycarbonate
Front Glass: 5mm thick tempered glass


Driver: Included
Voltage: 220~240 VAC

Color Temperature: 3000-4000-5000-6500K
Led: COB

ACCESSORY




Honeycomb Louvre



BOX DIMENSIONS
25x25x12 cm


BOX WEIGHT
1 kg

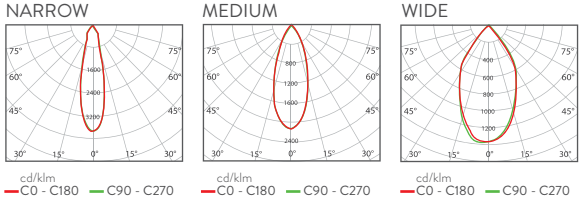






DL80
Wall-Mounted Luminaires

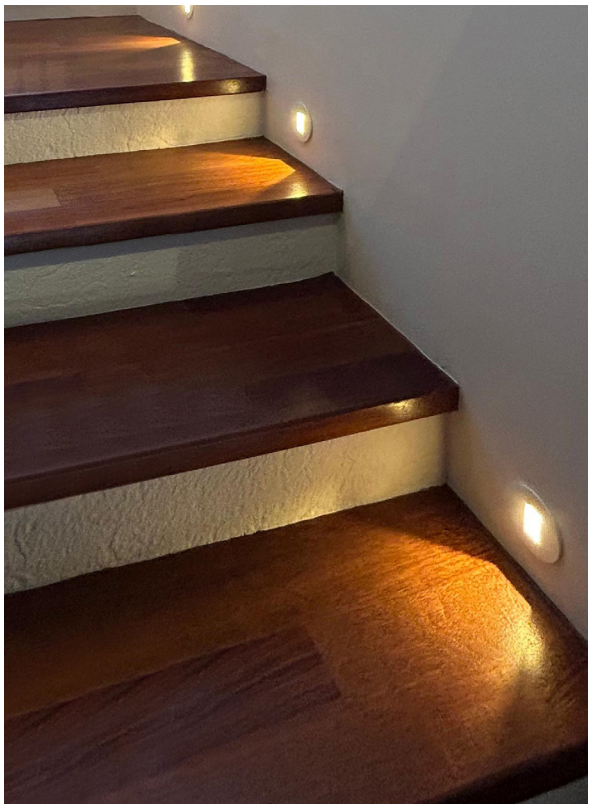

DL80 is a wall fixture developed for use in corridors and staircases. They have special asymmetrical reflectors produced from Tannenbaum aluminum. Therefore, they do not create glare, especially when illuminating steps. The frame holding the front glass is attached to the body with special magnets. Thus, no screws or similar mounting elements are visible on the fixture, which is visible in the space.

INDEX

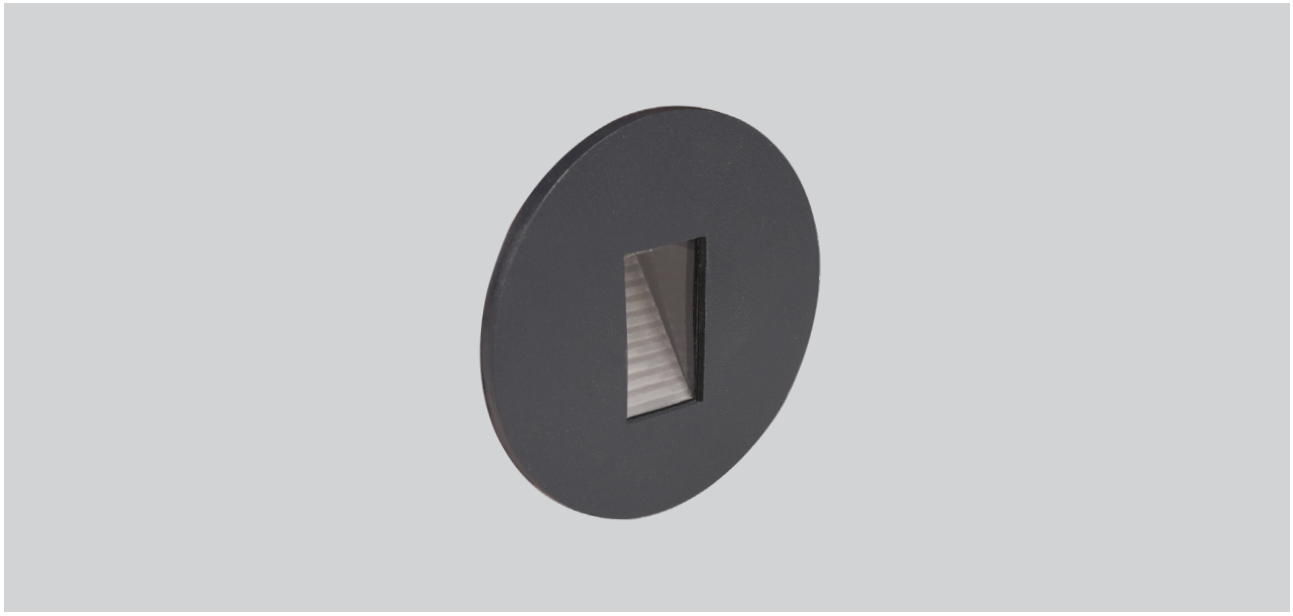

RAL COLORS

Std.
9006

Opt.
9005
9016

DL80

IP20 | RoHS COMPLIANT | CE


Code	Beam Angle	Luminous Flux	System Power	Weight
DL80	Asymmetrical	90 lm	3.5 W	0.2 Kg

Body: 1.5 mm thick DKP sheet metal body, outer frame is 3mm thick
Reflector: Aluminum

Driver: Included
Voltage: 220~240 VAC

Color Temperature: 3000-4000-5000K
Led: Power


Magnetic Cover



The magnetic cover enables easy installation without additional fastening elements.

BOX DIMENSIONS
10x10x8 cm

BOX WEIGHT
0.4 kg



WLC
Wall-Mounted Luminaires



The WLC wall sconce, with its unique modern and elegant form, will add a distinctive touch to the atmosphere of any space. Thanks to its aesthetic design, it can easily adapt to both classic and contemporary interiors. The fixture provides its light vertically in a single direction, offering focused and minimal illumination. With this feature, it serves as a decorative complement, especially in areas such as corridors, living rooms, and hotel rooms.

INDEX




RAL COLORS
Std.
9006
Opt.
9005
9016

WLC

IP40 | RoHS COMPLIANT | CE

Code	Beam Angle	Luminous Flux	System Power	Weight
WLC	Symmetrical	600lm	10W	0.45 Kg

Body: Aluminum
Diffuser: Frosted glass
Driver: Included
Voltage: 220~240 VAC
Color Temperature: 3000-4000-5000K
Led: COB



BOX DIMENSIONS
17x11x22 cm

BOX WEIGHT
0.5 kg

WCN
Wall-Mounted Luminaires



With its modern design and functional structure, this wall-mounted reading light offers practical use, especially beside beds, in hotel rooms, and next to work desks. Thanks to its adjustable body, you can easily direct the light to the desired spot, achieving focused and comfortable illumination. Its compact form saves space, while the simple and elegant appearance harmonizes with any décor. The USB port at the bottom provides the convenience of charging smart devices, making it a versatile solution.

INDEX



WCN

IP20 | RoHS COMPLIANT | CE

Code	Beam Angle	System Power	Weight
WCN	24°	3W	0.45 Kg

Body: Aluminum + iron
Led: Power Led
Driver: Included
Voltage: 220~240 VAC
Color Temperature: 3000-4000-5000K



BOX DIMENSIONS
47x38x42 cm


BOX WEIGHT
0.5 kg



DWS
Wall-Mounted Luminaires

Depending on the project's purpose, these can be used in a consecutive arrangement, at intervals, or individually. Its functional structure can provide downward or upward light, providing a perfect solution for corridors and passageways.

INDEX

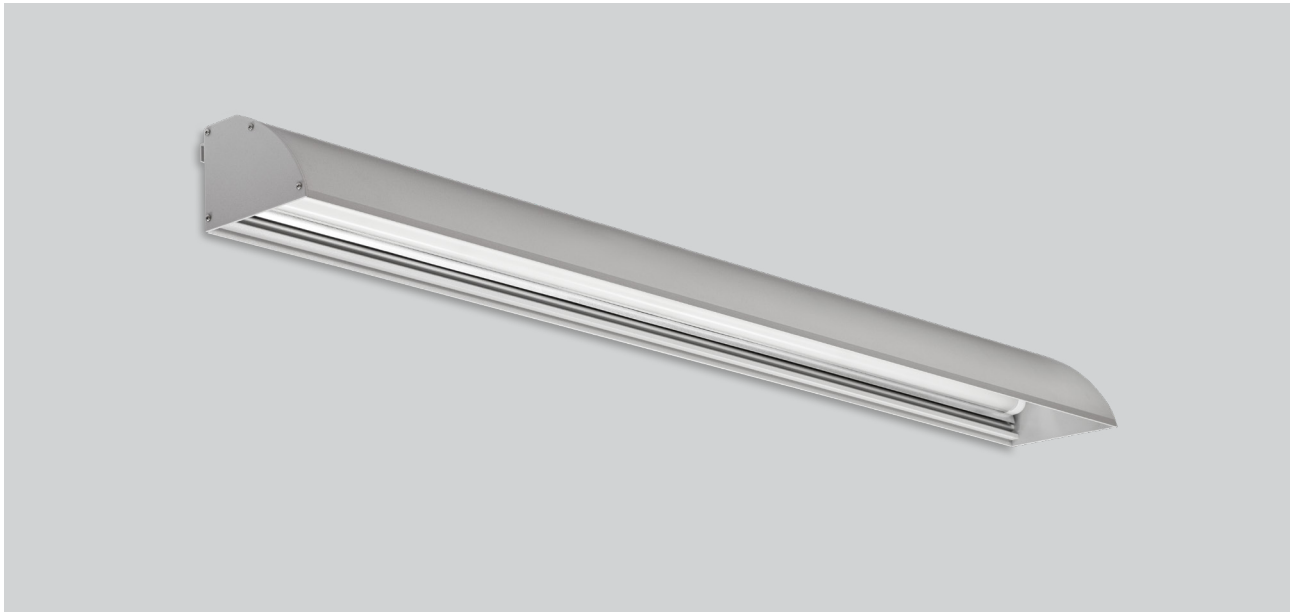

RAL COLORS
Std.
9006
Opt.
9005
9016

DWS

IP20 | RoHS COMPLIANT | CE


Code	Beam Angle	Luminous Flux	System Power	Weight
DWS	Asymmetrical	3.315 lm	30 W	1.4 Kg

Body: Aluminum extrusion
End Cap: Aluminum
Reflector: Aluminum
Voltage: 220~240 VAC
Color Temperature: 2700-3000-4000-5000-6500K
Led: Mid Power



BOX DIMENSIONS
15x15x120 cm

BOX WEIGHT
1.8 kg



Clean Room Luminaires

HFC

HFC/ST


HFC/SR

HFC
Clean Room Luminaires



Fixtures with high protection class are produced with specifications to be used in areas where hygiene is important. Light coming from multi LED source in fixtures passes through a sandblasted specially produced glass, and provides an extremely soft and homogeneous distribution to the environment. The clear glass option maximizes fixture efficiency. It is possible to produce according to all types of suspended ceilings.

INDEX

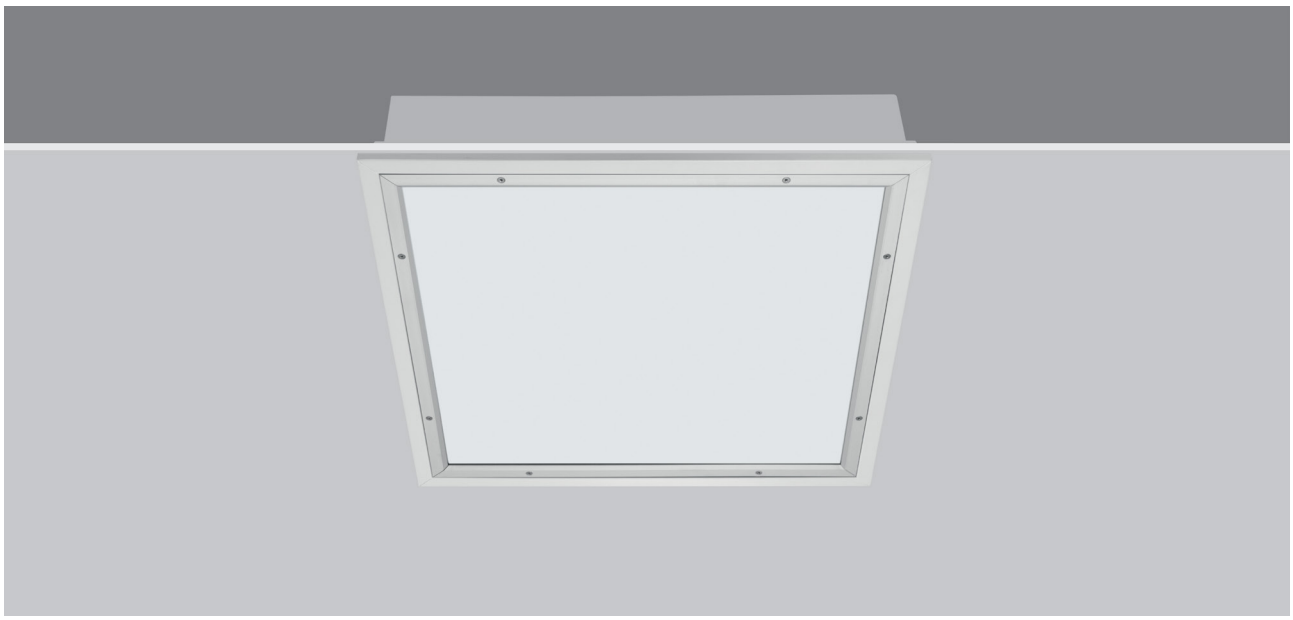

RAL COLORS

Std.
9016

Opt.
9005
9006

HFC/AL


IP54 | RoHS COMPLIANT | CE

Code	Beam Angle	Luminous Flux	System Power	Led	Weight
HFC/AL	110°	3.750 lm	40 W	Mid-Power	9 Kg

Body: DKP sheet metal
Front Glass: 4mm thick tempered glass and 1mm opal diffuser inside.
Frame: Aluminum

Diffuser: Opal
Driver: Included
Voltage: 220~240 VAC


Color Temperature: 3000-4000-5000-6500K
Led: Mid Power

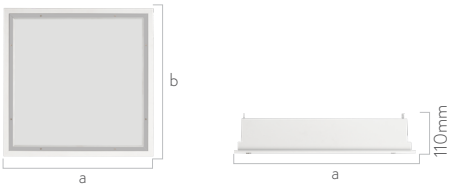

	Code	a	b	Cut-Out
Gypsum	HFC 300	595 mm	595 mm	580x580 mm
Clip-in	HFC 002	599 mm	599 mm	-

BOX DIMENSIONS
62x62x13 cm


BOX WEIGHT
9.5 kg



RAL COLORS

Std.
9016

Opt.
9005
9006

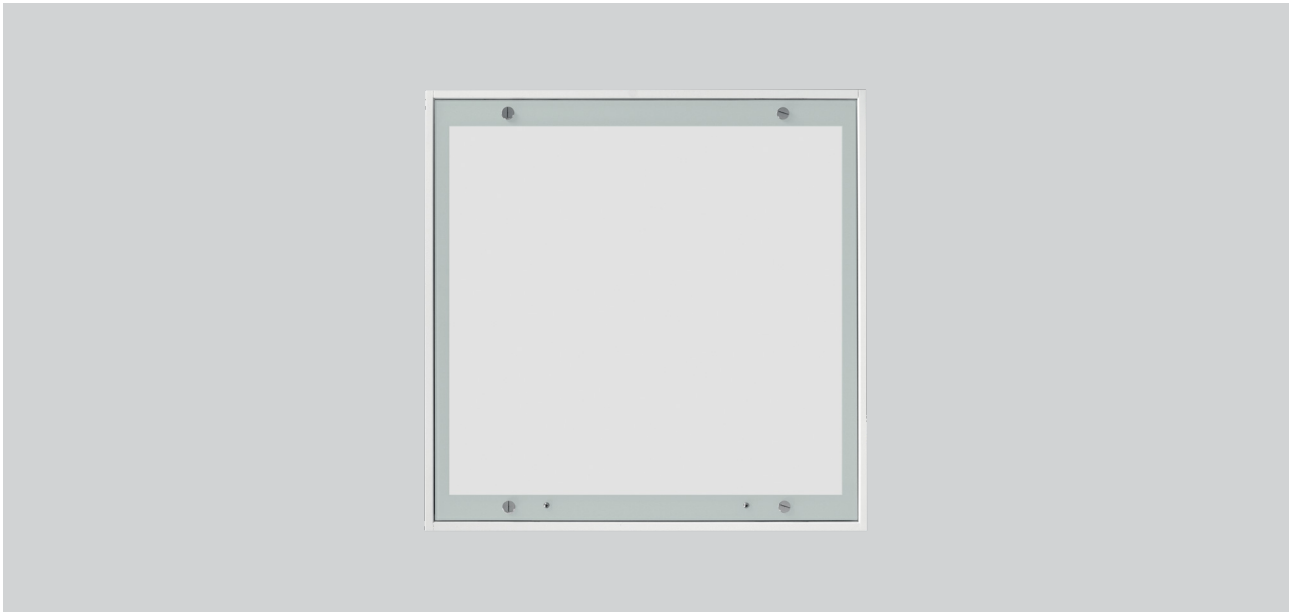

HFC/ST


IP54 | RoHS COMPLIANT | CE

Code	Beam Angle	Luminous Flux	System Power	Led	Weight
HFC/ST	110°	3.750 lm	40 W	Mid-Power	9 Kg

Body: DKP sheet metal
Front Glass: 4mm thick tempered glass and 1mm opal diffuser inside.

Diffuser: Opal
Driver: Included


Color Temperature: 3000-4000-5000-6500K
Voltage: 220~240 VAC

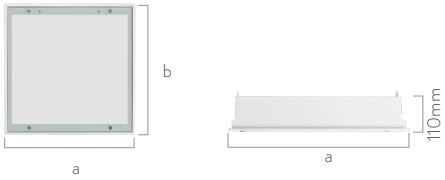


	Code	a	b	Cut-Out
Gypsum	HFC ST	595 mm	595 mm	580x580 mm
Clip-in	HFC ST	599 mm	599 mm	-

BOX DIMENSIONS
62x62x13 cm

BOX WEIGHT
9.5 kg



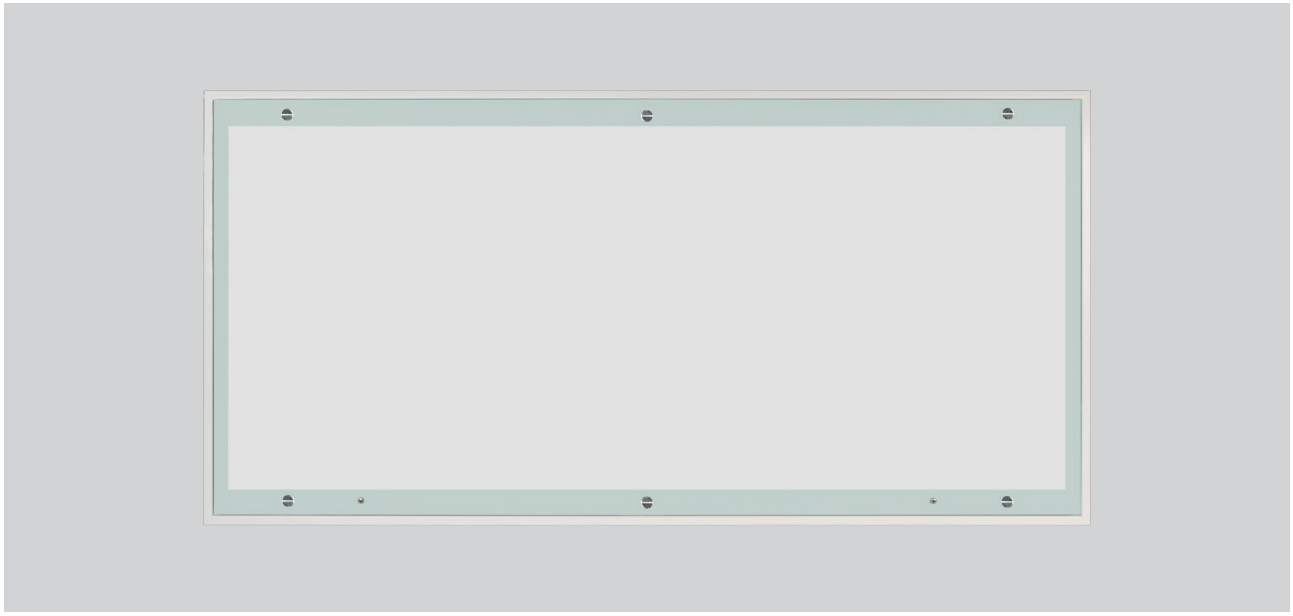

RAL COLORS
Std.
9016
Opt.
9005
9006

HFC/ST


IP54 | RoHS COMPLIANT | CE

Code	Beam Angle	Luminous Flux	System Power	Led	Weight
HFC/ST/30x120	110°	3.750 lm	40 W	Mid-Power	12 Kg
HFC/ST/60x120	110°	5.625 lm	60 W	Mid-Power	17 Kg

Body: DKP sheet metal
Front Glass: 4mm thick tempered glass and 1mm opal diffuser inside.

Diffuser: Opal
Driver: Included


Color Temperature: 3000-4000-5000-6500K
Voltage: 220~240 VAC

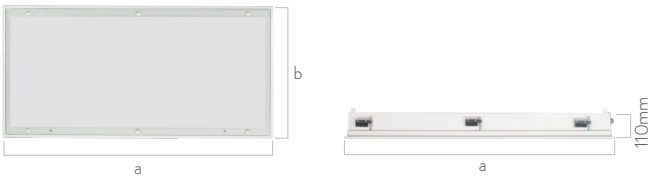

	Code	a	b	Cut-Out
Gypsum	HFC ST 30x120	1195 mm	295 mm	280x1180 mm
Gypsum	HFC ST 60x120	1195 mm	595 mm	580x1180 mm
Clip-in	HFC ST 30x120	1199 mm	299 mm	
Clip-in	HFC ST 60x120	1199 mm	599 mm	-

BOX DIMENSIONS
HFC ST30x120 32x122x13 cm
HFC ST60x120 62x122x13 cm


BOX WEIGHT
HFC/ST 30x120 13 kg
HFC/ST 60x120 18 kg



RAL COLORS

Std.
9016

Opt.
9005
9006

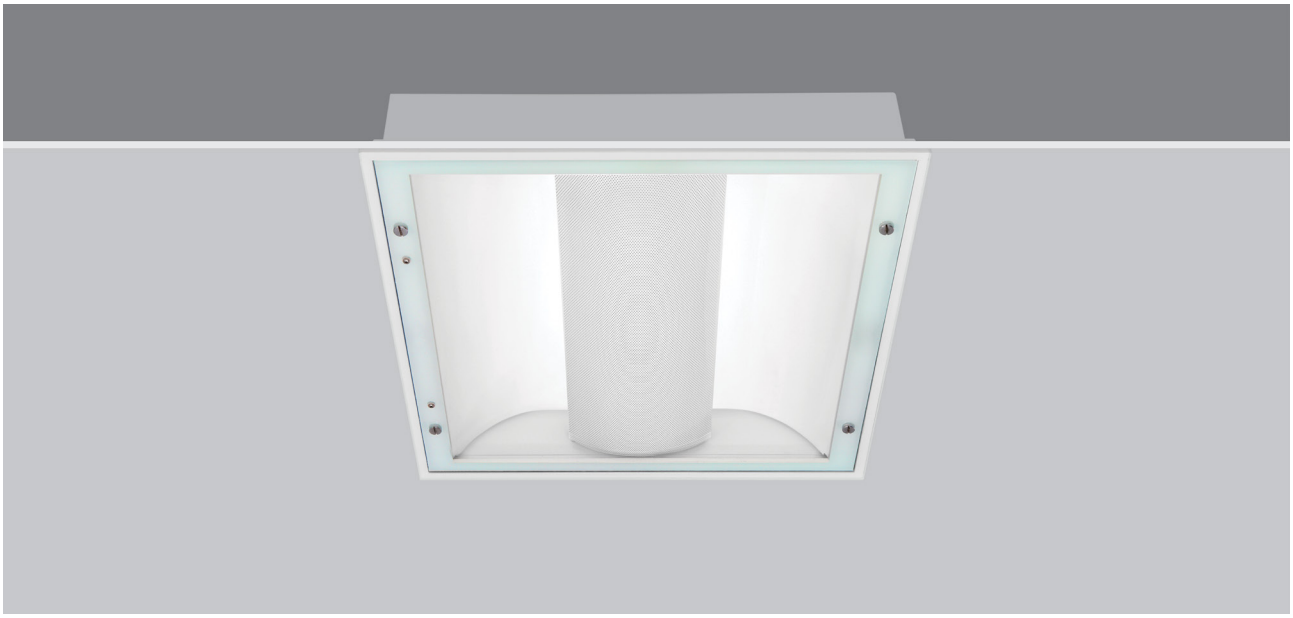

HFC/SR


IP54 | RoHS COMPLIANT | CE

Code	Beam Angle	Luminous Flux	System Power	Led	Weight
HFC/SR	175°	2.200 lm	27 W	Mid-Power	8 Kg
HFC/SR	175°	2.430 lm	35 W	Mid-Power	8 Kg

Body: DKP sheet metal
Front Glass: 4mm thick tempered glass

Diffuser: Opal
Driver: Included


Color Temperature: 3000-4000-5000-6500K
Voltage: 220~240 VAC

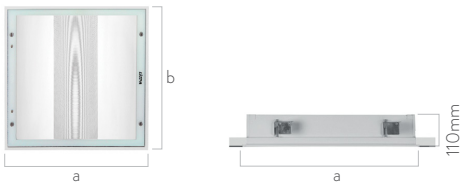

	Code	a	b	Cut-Out
Gypsum	HFC SR	595 mm	595 mm	580x580 mm
Clip-in	HFC SR	599 mm	599 mm	-

BOX DIMENSIONS
62x62x13 cm

BOX WEIGHT
8.5 kg




BIÇAKÇILAR

Basic and Trunk

TEKNOLINE
TRK




TEKNOLINE


Basic and Trunk

Teknoline is a comprehensive lighting system offering a wide range of optical light distributions to meet all types of applications and requirements — from linear luminaires to spotlights. It integrates cable and trunking systems, automation infrastructure, emergency units, and routing modules within a single platform.

In addition to these features, the system provides high efficiency and performance, significantly reducing operating expenses and initial investment costs. With its easy and practical installation solutions, Teknoline minimizes labor time and overall project costs.

The trunking can be easily installed by pressing the lock on the luminaire body with your finger.









INDEX



RAL COLORS

Std.
9016

Opt.
9005
9006

TCA

IP20 | RoHS COMPLIANT | CE

Code	Beam Angle	Luminous Flux	System Power	Weight
TCA 150 HE/MB	40°	5.010 lm	43 W	1.5 Kg
TCA 150 HE/WB	60°	4.990 lm	43 W	1.5 Kg
TCA 150 HE/AS	Asymmetric	4.840 lm	43 W	1.5 Kg
TCA 150 HE/DA	Double Asymmetric	4.970 lm	43 W	1.5 Kg
TCA 150 HO/MB	40°	6.730 lm	65 W	1.5 Kg
TCA 150 HO/WB	60°	6.710 lm	65 W	1.5 Kg
TCA 150 HO/AS	Asymmetric	6.540 lm	65 W	1.5 Kg
TCA 150 HO/DA	Double Asymmetric	6.680 lm	65 W	1.5 Kg


Body: Aluminum extrusion
Lens: PMMA (Vossloh Schwabe or Ledil)


Driver: Included
Voltage: 220~240 VAC


Color Temperature: 3000-4000-5000-6500K
Led: Mid Power





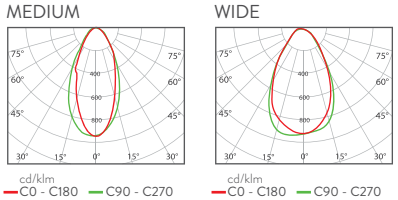

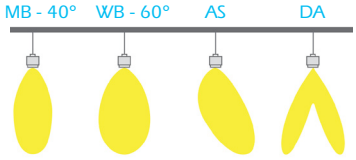

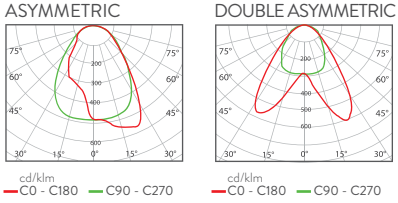

BOX DIMENSIONS
162x18x13 cm

BOX WEIGHT
6.4kg (4pcs in box)

RAL COLORS
Std.
9016
Opt.
9005
9006




TCE

IP20 | RoHS COMPLIANT | CE


Code	Beam Angle	Luminous Flux	System Power	Weight
TCE 150 HE/NB	20°	5.990 lm	44 W	1.8 Kg
TCE 150 HE/WB	60°	6.030 lm	44 W	1.8 Kg
TCE 150 HE/VWB	100°	5.910 lm	44 W	1.8 Kg
TCE 150 HE/AS	Asymmetric	5.900 lm	44 W	1.8 Kg
TCE 150 HE/DA	Double Asymmetric	6.040 lm	44 W	1.8 Kg
TCE 150 HO/NB	20°	7.810 lm	62 W	1.8 Kg
TCE 150 HO/WB	60°	7.830 lm	62 W	1.8 Kg
TCE 150 HO/VWB	100°	7.650 lm	62 W	1.8 Kg
TCE 150 HO/AS	Asymmetric	7.670 lm	62 W	1.8 Kg
TCE 150 HO/DA	Double Asymmetric	7.820 lm	62 W	1.8 Kg

Body: Aluminum extrusion
Lens: PMMA (Vossloh Schwabe or Ledil)
Driver: Included
Voltage: 220~240 VAC
Color Temperature: 3000-4000-5000-6500K
Led: Mid Power




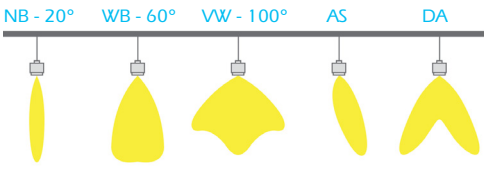


WIDE




NARROW




DOUBLE ASYMMETRIC



ASYMMETRIC



VERY WIDE



BOX DIMENSIONS
162x18x13 cm

BOX WEIGHT
7.5kg (4pcs in box)






TRK

Basic Lighting

TRK fixtures are developed for markets, offices, warehouses, and other indoor applications. With different optical options, they can meet all lighting needs in these spaces.

TRK fixtures also provide significant savings in operation as well as initial investment due to their high efficiency and economical structure.

INDEX

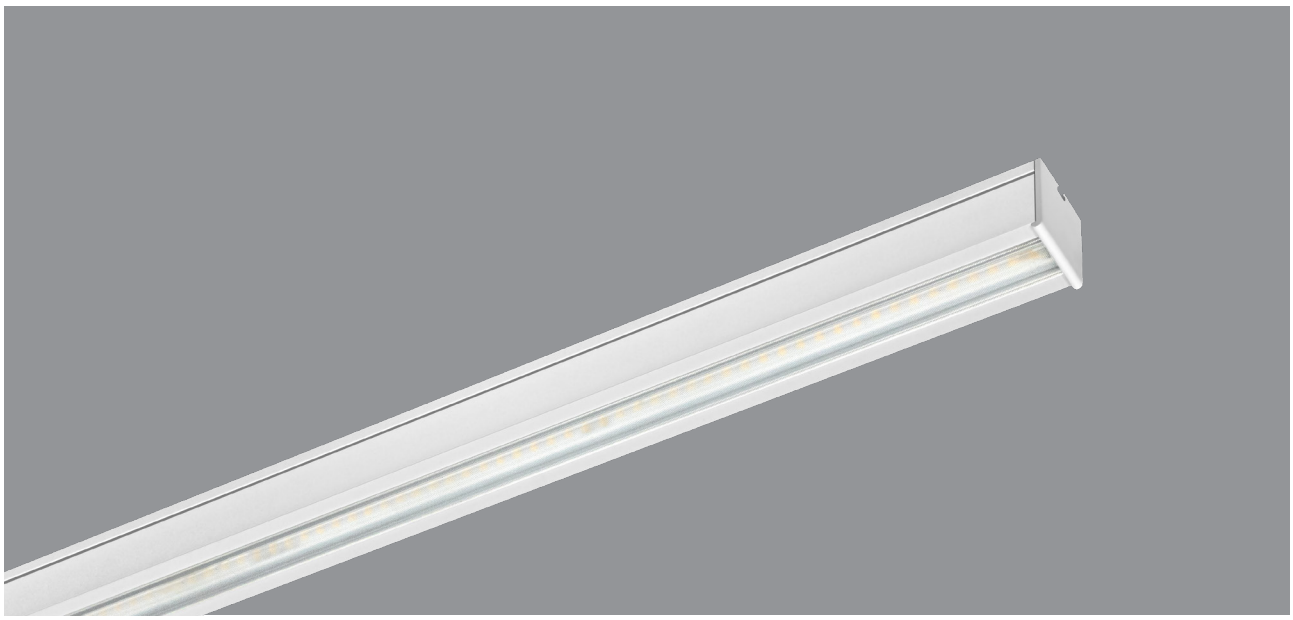

RAL COLORS

Std.

9016

Opt.

9005

9006

TRK


IP20 | RoHS COMPLIANT | CE

Code	Luminous Flux	System Power	Weight
TRK/100	2.430 lm	17 W	0.8 kg
TRK/150	3.260 lm	25 W	1.2 kg
TRK/200	4.570 lm	34 W	1.5 kg
TRK/250	5.285 lm	42 W	1.9 kg
TRK/300	6.720 lm	50 W	2.2 Kg

Body: Aluminum extrusion
Lens: PMMA (Vossloh Schwabe or Ledil)
Driver: Included

Beam Angle: 90°
Voltage: 220~240 VAC


Color Temperature: 3000-4000-5000-6500K
Led: Mid Power

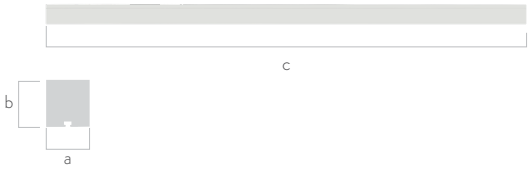

Code	a	b	c
TRK/100	44 mm	44 mm	1004mm
TRK/150	44 mm	44 mm	1498mm
TRK/200	44 mm	44 mm	1992mm
TRK/250	44 mm	44 mm	2486mm
TRK/300	44 mm	44 mm	2980mm

BOX DIMENSIONS
TRK300 5x5x305 cm
TRK250 5x5x255 cm
TRK200 5x5x205 cm
TRK150 5x5x155 cm
TRK100 5x5x105 cm

BOX WEIGHT
TRK300 2.5 kg
TRK250 2.2 kg
TRK200 1.7 kg
TRK150 1.4kg
TRK100 1 kg

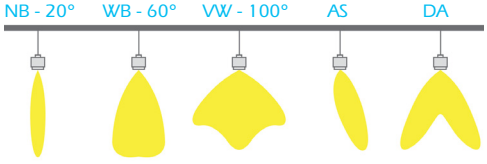



RAL COLORS
Std.
9016
Opt.
9005
9006

TRS


IP20 | RoHS COMPLIANT | CE

Code	Luminous Flux	System Power	Weight
TRS/100	2.100 lm	17 W	0.8 Kg
TRS/150	2.800 lm	25 W	1.2 Kg
TRS/200	4.000 lm	34 W	1.5 Kg
TRS/250	4.600 lm	42 W	1.9 Kg
TRS/300	5.950 lm	50 W	2.2 Kg

Body: Aluminum extrusion
Lens: PMMA
Driver: Included

Beam Angle: 90°
Voltage: 220~240 VAC


Color Temperature: 3000-4000-5000-6500K
Led: Mid Power

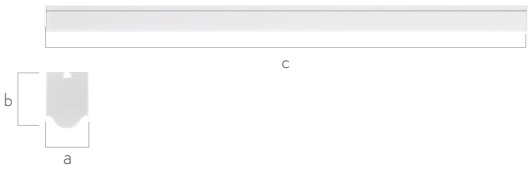

Code	a	b	c
TRS/100	44 mm	58 mm	1004mm
TRS/150	44 mm	58 mm	1498mm
TRS/200	44 mm	58 mm	1992mm
TRS/250	44 mm	58 mm	2486mm
TRS/300	44 mm	58 mm	2980mm

BOX DIMENSIONS
TRS300 5x5x305 cm
TRS250 5x5x255 cm
TRS200 5x5x205 cm
TRS150 5x5x155 cm
TRS100 5x5x105 cm

BOX WEIGHT
TRS300 2.5 kg
TRS250 2.2 kg
TRS200 1.7 kg
TRS150 1.4kg
TRS100 1 kg




DOLUM İSTASYONLARINDAN
SIVI YAĞ VE ÇİĞ SÜTÜNÜZÜ
kendi ambalajınıza doldurarak
HEM BÜTÇENİZİ HEM GELECEĞİNİZİ
KORUYUN!
SIVI YAĞ için;
yeniden doldurulabilir ambalajlar kullanarak hem bütçenize hem doğanın korunmasına destek olun.
ÇİĞ SÜT için;
yeniden doldurulabilir ambalajlar kullanarak hem bütçenize hem doğanın korunmasına destek olun.
Tarım Kredi Sifir Market
DEPO
Kadın Kooperatifi
Bebek Ürünleri
Temel Gıda Ürünleri
ÇİĞ SÜT
13,90



ELP
ESW



ELP
Waterproof

The ELP waterproof luminaire with high protection class (IP) rating is a perfect solution for various areas of application such as parking lots, storage areas and other areas for demanding protection from water and dust. The luminaire body is made of high quality material with extrusion method. In order to prevent undesirable escape of the light, the luminaire body and opal part with high permeability are manufactured in gray color. The luminaires are designed with an easy and fast production approach. In this way, the luminaire costs have been reduced and a very economical model has been created.

INDEX



ELP

IP65 | RoHS COMPLIANT | CE


Code	Beam Angle	Luminous Flux	System Power	Weight
ELP60-18	124°	1.800 lm	18 W	0.65 Kg
ELP120-35	124°	3.780 lm	35 W	1.2 Kg
ELP120-50	124°	5.370 lm	50 W	1.2 Kg

Body: Polycarbonate extrusion
Diffuser: Polycarbonate- opal

Voltage: 220~240 VAC
Driver: Included

Color Temperature: 3000-4000-5000-6500K
Led: Mid Power




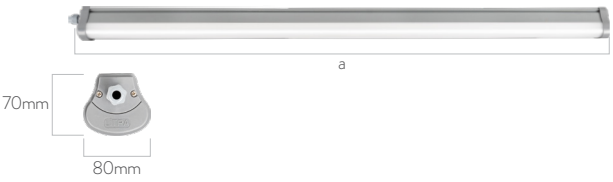

Code	a
ELP60	630 mm
ELP120	1230 mm

BOX DIMENSIONS
ELP-60 7.5x 13.5x 75 cm
ELP-120 7.5x 13.5x 145 cm

BOX WEIGHT
ELP-60 0.9 kg
ELP-120 1.5 kg



ELP

WATERPROOF



COLORS

MATT
ELOXAL
COATING

ELP-M


IP65 | RoHS COMPLIANT | CE

Code	Beam Angle	Luminous Flux	System Power	Weight
ELP/M60-18	124°	1.800 lm	18 W	1 Kg
ELP/M120-35	124°	3.780 lm	35 W	1.8 Kg
ELP/M120-58	124°	5.870 lm	58 W	1.8 Kg

Body: Aluminum extrusion
Diffuser: Polycarbonate - opal

Voltage: 220~240 VAC
Driver: Included


Color Temperature: 3000-4000-5000-6500K
Led: Mid Power

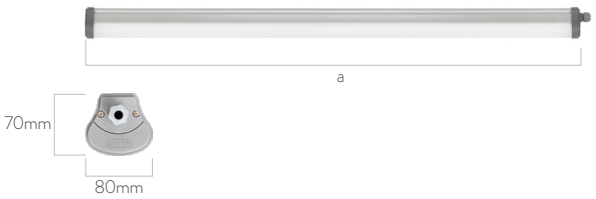


Code	a
ELP-M60	630 mm
ELP-M120	1230 mm

BOX DIMENSIONS
ELP-M60 7.5x13.5x75cm
ELP-M120 7.5x13.5x145cm

BOX WEIGHT
ELP-M60 1.3 kg
ELP-M120 2.1 kg



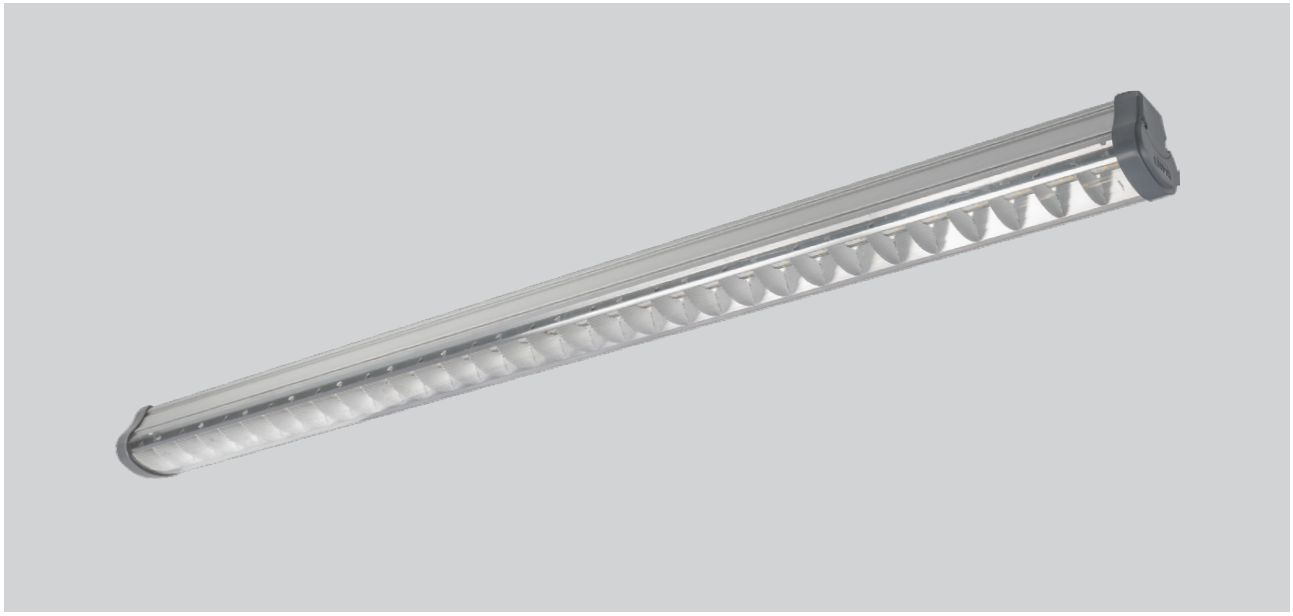

COLORS

MATT
ELOXAL
COATING

ELP-T

IP65 | RoHS COMPLIANT | CE

Code	Beam Angle	Luminous Flux	System Power	Led	Weight
ELP-T	75°	7.500 lm	75 W	Mid Power	1.8 Kg


Body: Aluminum extrusion
Diffuser: Polycarbonate - Transparent
Reflector: Aluminum
Driver: Included
Color Temperature: 3000-4000-5000-6500K
Voltage: 220~240 VAC




Code	a
ELP-T60	630 mm
ELP-T120	1230 mm

BOX DIMENSIONS
7.5x13.5x145cm

BOX WEIGHT
2 Kg



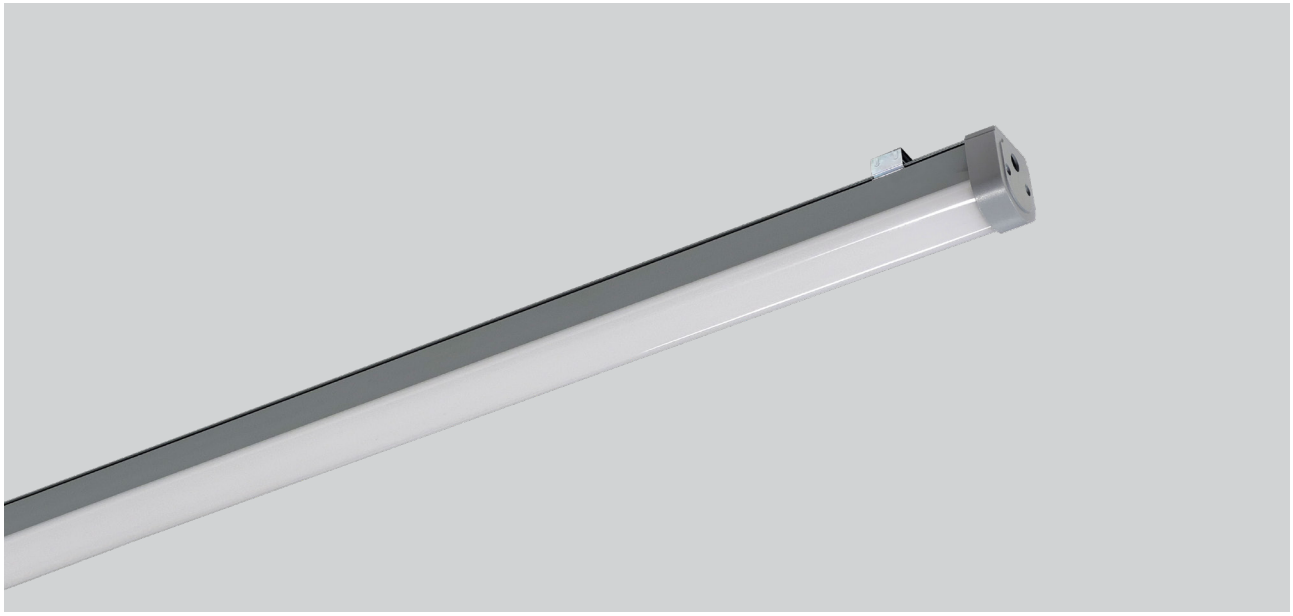

ELP/S

IP65 | RoHS COMPLIANT | CE

Code	Beam Angle	Luminous Flux	System Power	Led	Weight
ELP/S/20	124°	2.700lm	20 W	Mid Power	1.1 Kg
ELP/S/35	124°	4.725lm	35 W	Mid Power	1.1 Kg

Body: Polycarbonate extrusion
Diffuser: Polycarbonate- opal

Voltage: 220~240 VAC
Driver: Included

Color Temperature: 3000-4000-5000-6500K
Led: Mid Power


The luminaire is supplied with a 30 cm cable outlet.






BOX DIMENSIONS
7.5x 13.5x 130 cm

BOX WEIGHT
1.3 kg



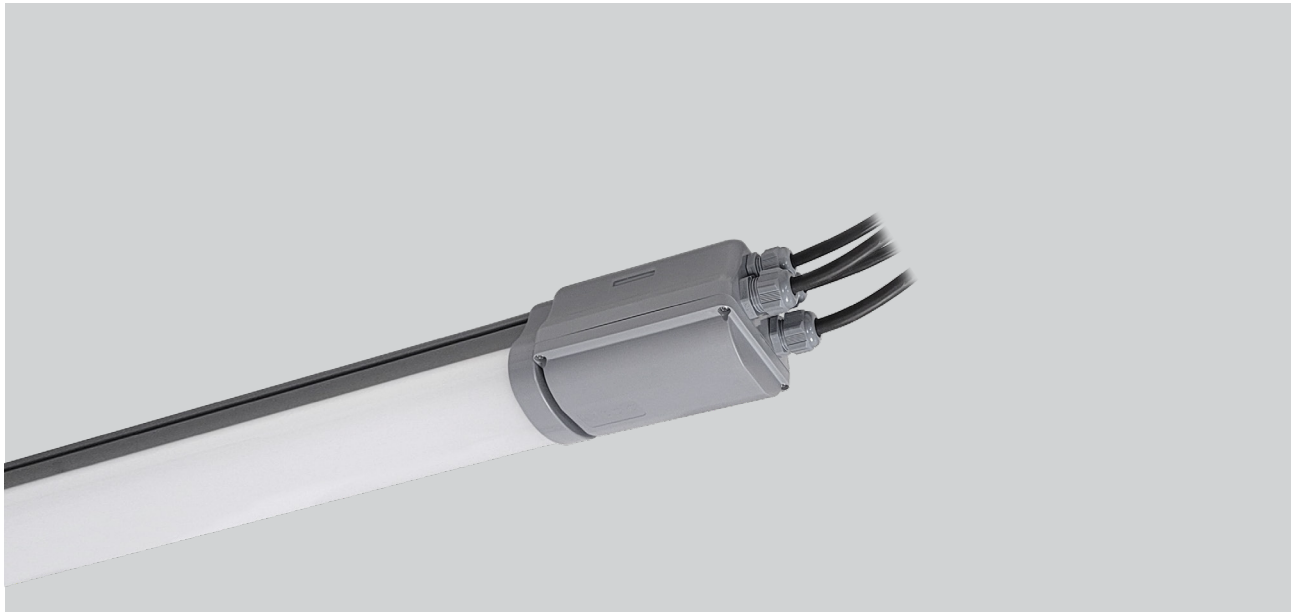



ELP/BX (Accessory)

IP65 | RoHS COMPLIANT | CE

Code	Box	Description
ELP/BX1	at one end	POWER + DALI (2 cable) / in-out
ELP/BX1	at one end	POWER + EMG (2 cable) / in-out
ELP/BX1	at one end	POWER + DALI + EMG (3 cable) / in
ELP/BX1	at one end	POWER + DALI + EMG (DALI) (4 cable) / in
ELP/BX2	at two ends	POWER + DALI + EMG (6 cable) / in-out
ELP/BX2	at two ends	POWER + DALI + EMG (DALI) (8 cable) / in-out
ELP/BX/PIR	-	PIR sensor

Body: Polycarbonate injection. Produced in an integrated structure with the luminaire.
Fittings: IP66



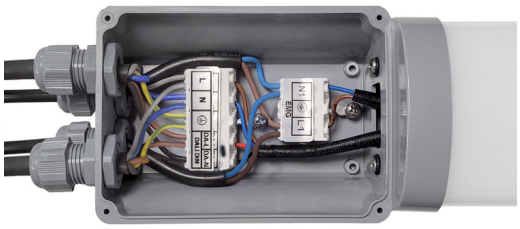

Cable entry options have been provided to meet DALI and EMG kit connection requirements and ensure full compatibility. The enclosure protects electrical connections at the appropriate IP level.



With PIR sensor option



ESW
Waterproof

These fixtures offer practical solutions with a focus on functionality and durability. With an IP65 protection rating, they provide excellent resistance to dust, moisture, and water, making them suitable for both indoor and outdoor applications. Designed for areas with technical requirements, they combine simplicity and robustness, delivering long-lasting performance and reliable operation for your projects.

INDEX



RAL COLORS
Std.
9016
Opt.
9005
9006

ESW

IP54 | RoHS COMPLIANT | CE

Code	Beam Angle	Luminous Flux	System Power	Weight
ESW	24°	1.300 lm	15 W	0.76 Kg

Body: Aluminum Injection
Diffuser: Polycarbonate
Driver: Included
Voltage: 220~240 VAC
Color Temperature: 3000-4000-5000-6500K
Led: COB



BOX DIMENSIONS
23x12x10 cm

BOX WEIGHT
1 Kg

Industrial Luminaires

ENDILED
APOLLO
PLN
TEKNOMAX




ENDILED

Industrial Luminaires

ENDILED fixtures are high protection class aluminum bodied fixtures produced with extremely high technology. They are suitable for use in many areas of industry, such as production areas, storage areas and particularly in high-ceilinged places. Reflectors produced with 98% optical efficiency by Alanod Miro-Silver technology are used in fixtures in order to ensure high efficiency in all types. Heating problems are completely solved thanks to the aluminum body and PCB with high thermal conductivity aluminum.

INDEX

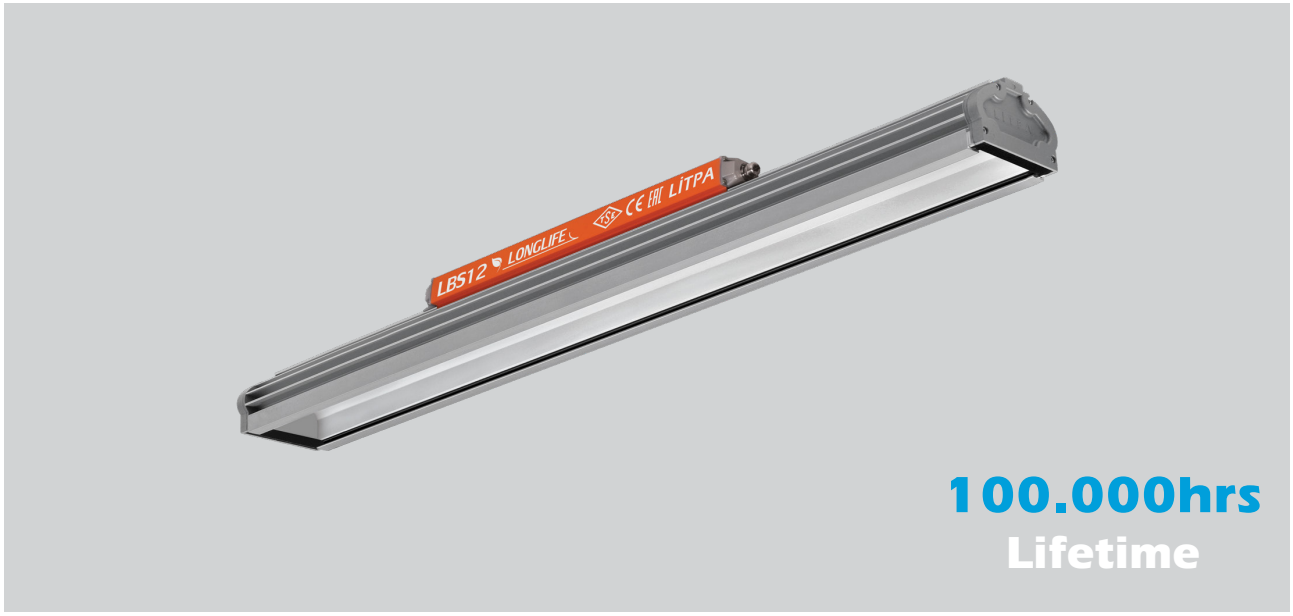

COLORS

MATT ELOXAL COATING

LBS - Longlife

IP66 | RoHS COMPLIANT | CE

Code	Luminous Flux	System Power	Weight
LBS-LL NB	14.700 lm	148 W	8 Kg
LBS-LL MB	14.950 lm	148 W	8 Kg
LBS-LL WB	14.650 lm	148 W	8 Kg

Body: Aluminum extrusion
End Cap: Aluminum injection
Reflector: MiroSilver 4: Bright, Narrow
MiroSilver 5: Matt, Medium-Wide

Voltage: 220~240 VAC
Diffuser: 4mm thick tempered glass

Color Temperature: 3000-4000-5000-6500K
Led: Mid Power


ACCESSORIES



Tilting Bracket




1396 mm




Narrow Angle
(ceiling height in excess of 10 meters)







Medium Angle
(ceiling height between 6-10m)






Wide Angle
(ceiling height lower than 6m)





BOX DIMENSIONS
145x11x12cm

BOX WEIGHT
8.5 kg

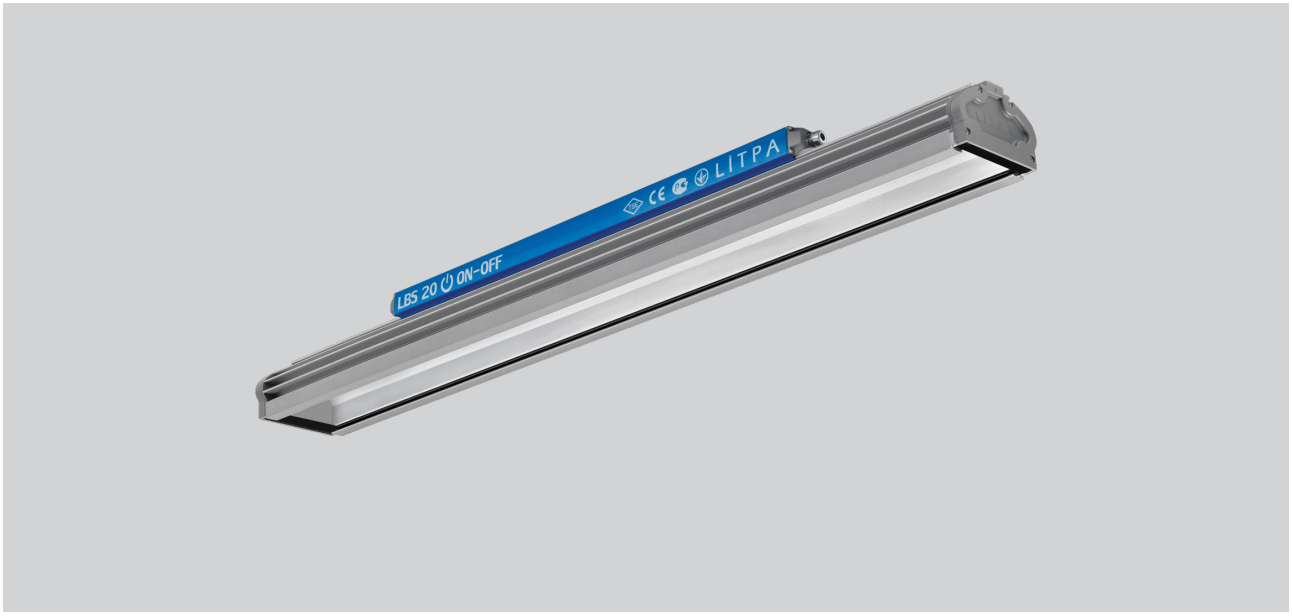

COLORS
MATT
ELOXAL
COATING

LBS12 - High Efficiency

IP66 | RoHS COMPLIANT | CE

Code	Luminous Flux	System Power	Weight
LBS 12/80/NB	11.900 lm	80 W	8 Kg
LBS 12/80/MB	12.150 lm	80 W	8 Kg
LBS 12/80/WB	11.870 lm	80 W	8 Kg
LBS 12/130/NB	20.445 lm	130 W	8 Kg
LBS 12/130/MB	20.640 lm	130 W	8 Kg
LBS 12/130/WB	20.440 lm	130 W	8 Kg
LBS 12/220/NB	28.600 lm	220 W	8 Kg
LBS 12/220/MB	28.700 lm	220 W	8 Kg
LBS 12/220/WB	28.550 lm	220 W	8 Kg

Body: Aluminum extrusion
End Cap: Aluminum injection
Reflector: MiroSilver 4: Bright, Narrow
MiroSilver 5: Matt, Medium-Wide


Voltage: 220~240 VAC
Diffuser: 4mm thick tempered glass

Color Temperature: 3000-4000-5000-6500K
Led: Mid Power

ACCESSORIES



Tilting Bracket






Code	Lenght (a)	Weight
LBS 12	1396mm	8 kg


Narrow Angle
(ceiling height in excess of 10 meters)







Medium Angle
(ceiling height between 6-10m)





Wide Angle
(ceiling height lower than 6m)





BOX DIMENSIONS
132x11x12cm

BOX WEIGHT
8.5 kg



COLORS

MATT
ELOXAL
COATING

LBS6 - High Efficiency

IP66 | RoHS COMPLIANT | CE

Code	Luminous Flux	System Power	Weight
LBS 6/45/NB	7.300 lm	45 W	4 Kg
LBS 6/45/MB	7.420 lm	45 W	4 Kg
LBS 6/45/WB	7.280 lm	45 W	4 Kg
LBS 6/65/NB	9.425 lm	65 W	4 Kg
LBS 6/65/MB	9.680 lm	65 W	4 Kg
LBS 6/65/WB	9.500 lm	65 W	4 Kg
LBS 6/85/NB	12.600 lm	85 W	4 Kg
LBS 6/85/MB	12.900 lm	85 W	4 Kg
LBS 6/85/WB	12.500 lm	85 W	4 Kg

Body: Aluminum extrusion
End Cap: Aluminum injection
Reflector: MiroSilver 4: Bright, Narrow
MiroSilver 5: Matt, Medium-Wide


Voltage: 220~240 VAC
Diffuser: 4mm thick tempered glass

Color Temperature: 3000-4000-5000-6500K
Led: Mid Power

ACCESSORIES



Tilting Bracket








Code	Lenght(a)	Weight
LBS 6	796mm	4 kg

BOX DIMENSIONS
72x11x12cm

BOX WEIGHT
4.5 kg







APOLLO

Industrial Luminaires





This industrial luminaire has a 120-degree lighting angle. The LED hall spotlight is equipped with high-tech lenses that prevent glare and offers stable performance with a low UGR value. Made from IP65 waterproof aluminum casting material, the luminaire can be used safely even on rainy days. The luminaire is ideal for wide lighting areas such as garages, warehouses, greenhouses, and factories. It is also suitable for places like gyms, logistics centers, toll booths, and supermarkets. This luminaire provides a safe and long-lasting lighting solution for both indoor and outdoor environments.

INDEX



RAL COLORS

Std.
9005

Opt.
9016
9006

APL40

IP65 | RoHS COMPLIANT | CE

Code	Beam Angle	Luminous Flux	System Power	Weight
APL40-L150	80°	19.350 lm	150 W	4.7 Kg
APL40 -L170	80°	21.950 lm	170 W	4.7 Kg
APL40-L200	80°	25.820 lm	200 W	4.7 Kg
APL40-L230	80°	32.050 lm	250 W	4.7 Kg
APL40-C - 150	115°	20.070 lm	150 W	5 Kg
APL40-C - 170	115°	22.770 lm	170 W	5 Kg
APL40-C - 200	115°	26.785 lm	200 W	5 Kg
APL40-C - 230	115°	33.250 lm	250 W	5 Kg

Body: Aluminum injection
Diffuser: PMMA lens (only APL model)
Front Glass: 5mm thick tempered glass (only APL-C model)

Voltage: 220~240 VAC
Driver: Included

Color Temperature: 3000-4000-5000-6500K
Led: Mid Power

ACCESSORIES
Circular Reflector



Body: Sheet Metal

BRACKETS




Free Bracket

APL-L



386mm

APL-C




386mm




386mm

APL-L



APL-C



BOX DIMENSIONS
20x40x40cm

BOX WEIGHT
5.5 kg



RAL COLORS
Std.
9005
Opt.
9016
9006

APL30/L

IP65 | RoHS COMPLIANT | CE


Code	Luminous Flux	System Power	Weight
APL30/L 150	23.550 lm	150 W	2.2 Kg
APL30/L 180	26.450 lm	180 W	2.2 Kg

Body: Aluminum injection
Diffuser: PMMA lens
Voltage: 220~240 VAC
Driver: Included
Color Temperature: 3000-4000-5000-6500K
Led: Mid Power

BRACKETS



Free Bracket




∅ 285mm



∅ 285mm

BOX DIMENSIONS
30x30x16xcm

BOX WEIGHT
2.5 kg





RAL COLORS

Std.
9005

Opt.
9016
9006

APL20/L

IP65 | RoHS COMPLIANT | CE

Code	Luminous Flux	System Power	Weight
APL20/L 80	12.650 lm	80 W	1.6 Kg
APL20/L 100	15.500 lm	100 W	1.6 Kg
APL20/L 120	17.900 lm	120 W	1.6 Kg

Body: Aluminum injection
Diffuser: PMMA lens


Voltage: 220~240 VAC
Driver: Included

Color Temperature: 3000-4000-5000-6500K
Led: Mid Power

BRACKETS



Free Bracket




Ø 230mm



Ø 230mm

BOX DIMENSIONS
25x25x16xcm

BOX WEIGHT
1.8 kg



PLN
Industrial Luminaires



PLN luminaires combine flawless design, high efficiency, and versatile optical options for a wide range of lighting applications. This innovative, contemporary industrial lighting solution offers significant opportunities for lighting designers and exceptional convenience for practitioners. Each luminaire is manufactured using the highest-quality, longest-lasting materials. They are tested under extreme environmental conditions, including humidity, dust, heat, and cold, to ensure reliable performance. The optics of each module are designed according to their mechanical and electrical properties, and optimal module combinations have been developed to deliver the best possible lighting results.

INDEX



RAL COLORS

Std.
9005

Opt.
9016
9006

PLN 300

IP66 | RoHS COMPLIANT | CE

Code	Beam Angle	Luminous Flux	System Power	Weight
PLN-300 NB	15°	33.200 lm	300 W	7 Kg
PLN-300 MB	45°	37.300 lm	300 W	7 Kg
PLN-300 WB	90°	39.000 lm	300 W	7 Kg
PLN-300 AS	Asymmetrical	37.500 lm	300 W	7 Kg

Body: Aluminum extrusion
Lens: PMMA


Voltage: 220~240 VAC
Driver: Included

Color Temperature: 3000-4000-5000-6500K
Led: Mid-Power & High-Power


ACCESSORIES



Tilting Bracket





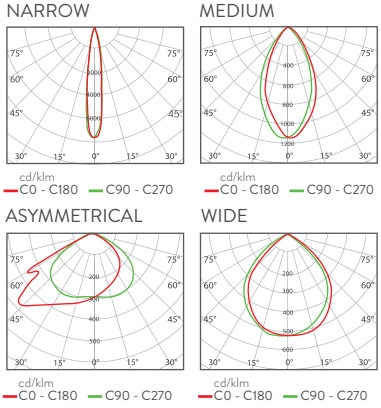

BOX DIMENSIONS
70x30x20 cm

BOX WEIGHT
7.5 kg

RAL COLORS
Std.
9005
Opt.
9016
9006



PLN 150

IP66 | RoHS COMPLIANT | CE


Code	Beam Angle	Luminous Flux	System Power	Weight
PLN-150 NB	15°	16.600 lm	150 W	4.5 Kg
PLN-150 MB	45°	18.650 lm	150 W	4.5 Kg
PLN-150 WB	90°	19.500 lm	150 W	4.5 Kg
PLN-150 AS	Asymmetrical	18.750 lm	150 W	4.5 Kg

Body: Aluminum extrusion
Lens: PMMA
Voltage: 220~240 VAC
Driver: Included
Color Temperature: 3000-4000-5000-6500K
Led: Mid-Power & High-Power


ACCESSORIES



Adjustable Bracket





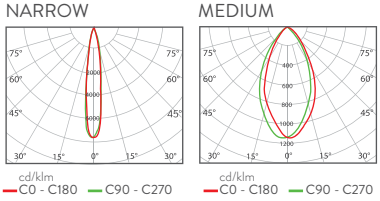

BOX DIMENSIONS
63x20x20 cm

BOX WEIGHT
5 kg



RAL COLORS

Std.
9005

Opt.
9016
9006

PLN 75

IP66 RoHS CE

Code	Beam Angle	Luminous Flux	System Power	Weight
PLN-75 NB	15°	8.300 lm	75 W	2.5 Kg
PLN-75 MB	45°	9.320 lm	75 W	2.5 Kg
PLN-75 WB	90°	9.750 lm	75 W	2.5 Kg
PLN-75 AS	Asymmetrical	9.380 lm	75 W	2.5 Kg

Body: Aluminum extrusion
Lens: PMMA


Voltage: 220~240 VAC
Driver: Included

Color Temperature: 3000-4000-5000-6500K
Led: Mid-Power & High-Power


ACCESSORIES



Adjustable Bracket





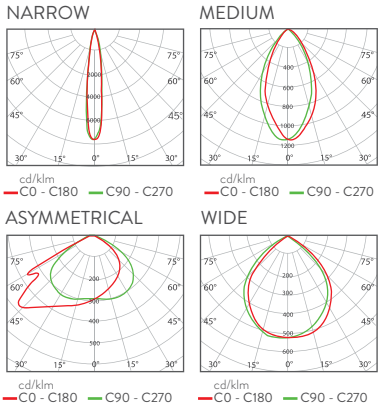

BOX DIMENSIONS
50x20x20 cm

BOX WEIGHT
3 kg


FHL

Industrial Luminaires



FHL is a high-performance luminaire specially designed for industrial lighting needs. Manufactured using high-quality and durable materials, it ensures maximum durability and efficiency. It is also resistant to challenging environmental conditions such as moisture, dust, extreme cold, and heat. It provides reliable and uninterrupted illumination for large areas. With its energy-saving features and long service life, FHL is an ideal solution for businesses.

INDEX

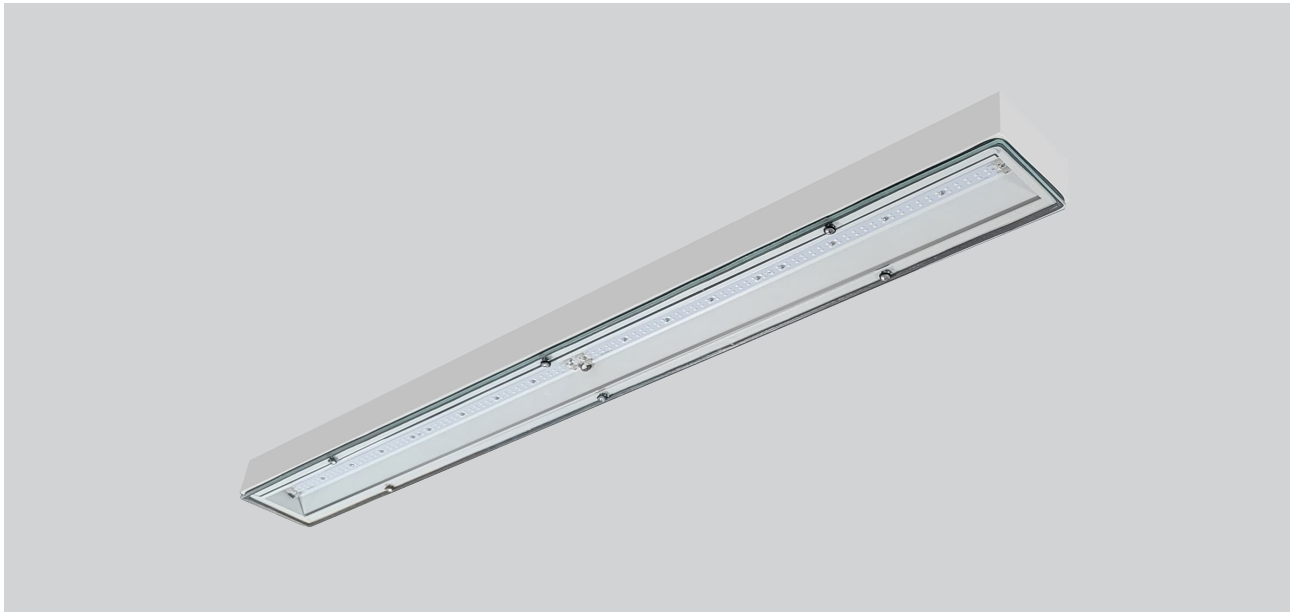

RAL COLORS
Std.
9016
Opt.
9005
9006

FHL

IP54 | RoHS COMPLIANT | CE

Code	Beam Angle	Luminous Flux	System Power	Weight
FHL60/B	110°	8.100 lm	70 W	2.5 Kg
FHL120/B	110°	13.600 lm	110 W	4.2 Kg

Body: DKP metal sheet
Lens: PMMA


Voltage: 220~240 VAC
Driver: Included

Color Temperature: 3000-4000-5000-6500K
Led: Mid-Power & High-Power

FHL/AL (Optional)




Aluminum Reflector

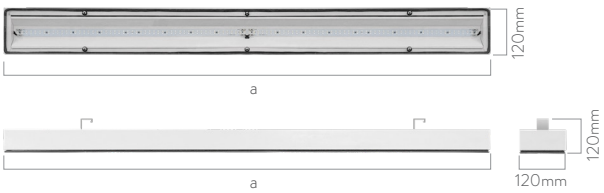


Code	a
FHL120	1250 mm
FHL60	650 mm

BOX DIMENSIONS
130x14x11 cm

BOX WEIGHT
5 kg




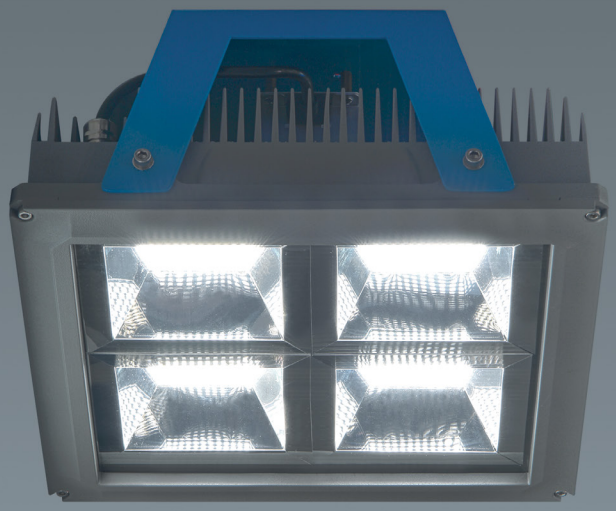

TEKNOMAX
Industrial Luminaires

Teknomax luminaires are designed for operating without any problems in industrial locations where luminaire bodies are exposed to harsh environment conditions. The luminous efficiency of the luminaires has been reached to extremely high levels. The luminaire efficiency comes from combining the optic design with the newest generation LEDs in the most appropriate way. Narrow and wide angle types of luminaires can be produced according to ceiling heights. Luminaires can be installed in any way using busbar, cable tanks and free hangers.

INDEX

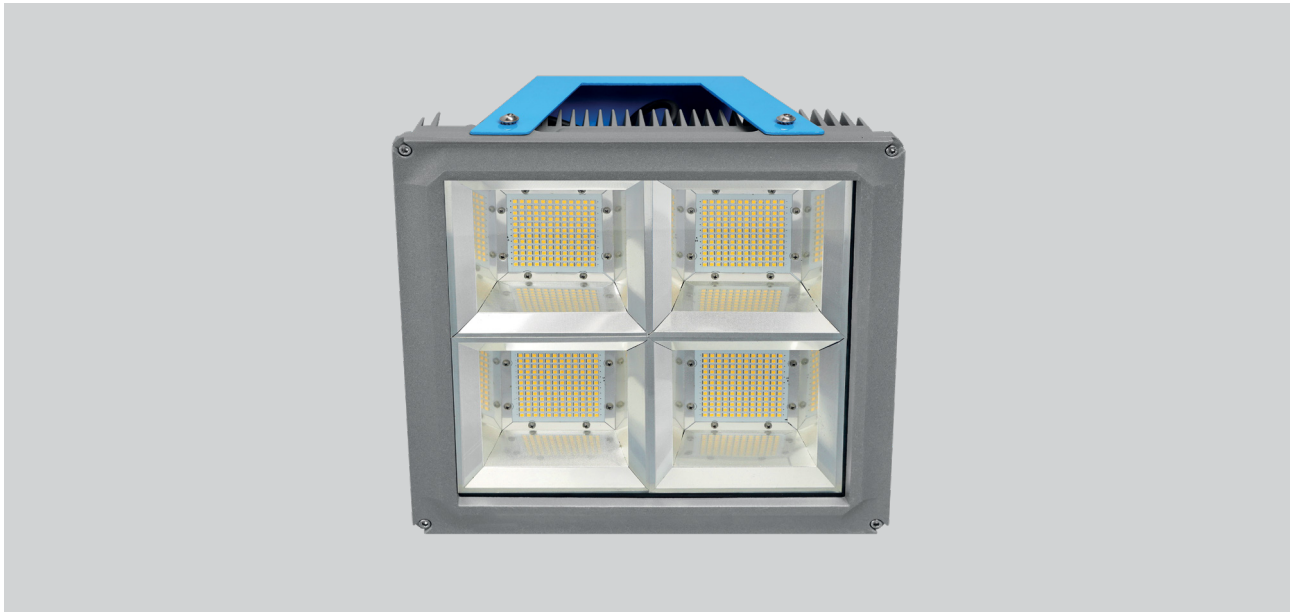

RAL COLORS

Std.
9006

Opt.
9005
9016

TEKNOMAX

IP66 | RoHS COMPLIANT | CE


Code	Luminous Flux	System Power	Weight
HCL/YT 50	7.000 lm	50 W	13 Kg
HCL/YT 100	13.000 lm	100 W	13 Kg
HCL/YT 150	19.500 lm	150 W	13 Kg
HCL/YT 200	25.000 lm	200 W	13 Kg
HCL/YT 240	30.000 lm	240 W	13 Kg

Body: Aluminum injection
Reflector: Vacuum anodized Micro-Silver aluminium from Alanod with a reflectivity index of 97%.

Voltage: 220~240 VAC
Driver: Included
Front Glass: 5mm thick tempered glass

Beam Angle: Symmetrical
Color Temperature: 3000-4000-5000-6500K
Led: Mid-Power & High-Power

BRACKETS



HCL-YT/AB
Busbar



HCL-YT/AK
Cable Tray





HCL-YT/AG
Free Bracket






HCL-YT/AS







NARROW




MEDIUM



ASYMMETRIC



WIDE



BOX DIMENSIONS
44x48x19 cm

BOX WEIGHT
13.5 kg

EXIT and Emergency

LXT



LXT

Exit and Emergency

Litpa emergency exit and guidance luminaire is a reliable luminaire option with high quality material structure and technical specifications. Suitable for single face and double face use. Suitable for many areas of use, from offices to meeting rooms, shopping centers to schools.

INDEX



RAL COLORS
Std.
9016

LXT


IP40 RoHS COMPLIANT CE

Code	Luminous Flux	System Power	Voltage Range	Colour Temperature	Led	Weight
LXT	95 lm	3W	220~240 VAC	6000K	Mid-Power	0.7 Kg

Body: Aluminum extrusion and plastic
Diffuser: Plexiglass
Environment: Wall and ceiling surface

Battery: 1.2Vdc 1.000mAh durable Ni-Cd
Viewing Distance: 15-30m
Working Temperature: -5°C +45°C

Charging Time: 24hrs
Decharging Time: 3hrs
Class: I

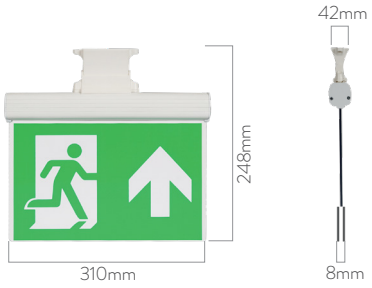



BOX DIMENSIONS
35x23x9 cm

BOX WEIGHT
1 kg

INDEX

A

AGS 130
APOLLO 280
APL 281

D

DAP 234
DARK-LINE 14
DARK-INN 24
DARK-ZONE 32
DFG 195
DFR 189
DL 45 98
DL 80 238
DL2006 103
DL2010 101
DLD 16
DLG 25
DML MAXI 140
DML MINI 144
DNT 126
DOP 76
DOT 86
DOT DECO 95
DOT DO 96
DR1- DR7 87-93
DSO 82
DWS 244
DYG 138

E

ELP 266
ENDILED 276
EOSLED 188
ESW 272

F

FASHIONLED 180
FHL 288
FNSB 214
FNSS/Y 224
FPD-AP 73
FPD-LD 75
FPD-SD 74

G

GALAXYLED 100

H

HCL/YT 291
HFC/AL 249
HFC/SR 252
HFC/ST 250

L

LBS 277
LCF 121
LEG 202
LGO 206
LGS 201
LGR 33
LKG 148
LML 232
LSO 222
LSR 34
LSS 220
LUCIFER 120
LUMIFLEX 40
LXT 294

M

MKA 62
MKO 63
MLP 44
MNC 57
MNY 55
MNZ 59
MOON 212
MPZ 46
MSZ 48
MSG/B 108
MSG/DC 110
MSG/N 136
MSG/O 106
MSG/SC 111
MSG/WP 107
MSD 50
MSK 54
MSN 67
MSO 53
MSU 51
MSY 52
MTM 65
MVA 64

O

ODO 78
OFISLED 200
OLG 213
ORION 72

P

PGH 150
PGR 35
PLN 284
PLS 135
PNS 162
PULSAR 134
PUNTO 112

R

RLM/D 154
RLM/DK 156
RLM/RY 168
RLP50 181
RLP70 182
RLP90 183
RLP-C 160
RLP/RY 166
RLP/S 164

S

SAKURA 174
SCP 226
SFR 124
SKR 176
SLO 80
SSD 116
SSL 113

T

TCA 257
TCE 258
TEKNOLINE 256
TEKNOMAX 290
THIN-LINE 36
TRACKS 172
TRK-TRS 260

W

WCN 242
WLC 240
WLS 230