



LSO

Surface-Mounted Luminaires

LSO luminaires, which have a lot of usage areas, are used in the places where there are no opportunities of recessed ceiling by installing onto the surface.

They are produced with the shape square and rectangle according to the needs and meets various power requirements. They are produced with the understanding of eye-pleasing simple, stylish structure and high quality production.





RAL COLORS

Std.

9016

Opt.

9005

9006

LSO

IP20  


Code	Luminous Flux	System Power	Weight
LSO 60-60/30	3.300 lm	30 W	5.1 Kg
LSO 60-60/35	4.000 lm	35 W	5.1 Kg
LSO 60-60/40	4.350 lm	40 W	5.1 Kg
LSO 30-30	2.200 lm	20 W	2 Kg
LSO 30-120	3.850 lm	35 W	5 Kg



Body: DKP sheet steel
Frame: DKP sheet steel
Diffuser: Opal

Driver: Included
Beam Angle: 110°
Voltage: 220~240 VAC

Color Temperature: 2700-3000-4000-5000-6500K, TW
Led: Mid Power

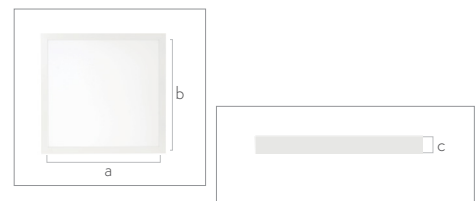

Code	a	b	c
LSO 30-30	340 mm	340 mm	80 mm
LSO 30-60	575 mm	300 mm	70 mm
LSO 60-60	625 mm	625 mm	70 mm
LSO 30-120	1150 mm	300 mm	70 mm



BOX DIMENSIONS

LSO/60-60: 65x64x14cm
 LSO/30-30: 39x39x10cm
 LSO/30-120: 32x122x8cm



BOX WEIGHT

LSO/60-60: 5.4 kg
 LSO/30-30: 2.3 kg
 LSO/30-120: 5.3 kg

