




LUCIFER

Downlight

High energy-efficient Lucifer series fixtures can be used in many areas with the large usage area thereof including shops, hotels, restaurants, cafés, educational areas hospital and houses.

They can meet the investment in the usage area after a very short time even with the change of the existing systems. The lives of used Cob Led's are very long due to their fixture bodies and the aluminum coolers placed thereon.

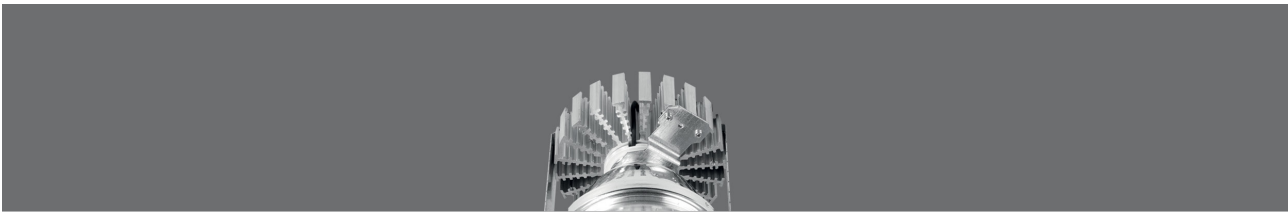

RAL COLORS

Std.

9016

Opt.

9005

9006

LUCIFER / SYMMETRICAL

IP20  

Code	Luminous Flux	System Power	Weight
LCF/S 15	1.300 lm	15 W	0.95 Kg
LCF/S 27	2.295 lm	27 W	1.35 Kg
LCF/S 36	3.060 lm	36 W	1.75 Kg

Frame: Aluminum Injection

Diffuser: Prismatic Lens

Reflector: Aluminum

Cooler: Aluminum Extrusion

Beam Angle: Symmetrical

Voltage: 220~240 VAC

Color Temperature: 2700-3000-4000-5000-6500K

Driver: Included

Led: COB




Code	Cut-Out
LCF/S	Ø206 mm




BOX DIMENSIONS
 LCF15 25x25x32 cm
 LCF27 25x25x32 cm
 LCF36 25x25x32 cm



BOX WEIGHT
 LCF15 1.2 kg
 LCF27 1.6 kg
 LCF36 2 kg



cd/klm
 - C0 - C180 - C90 - C270

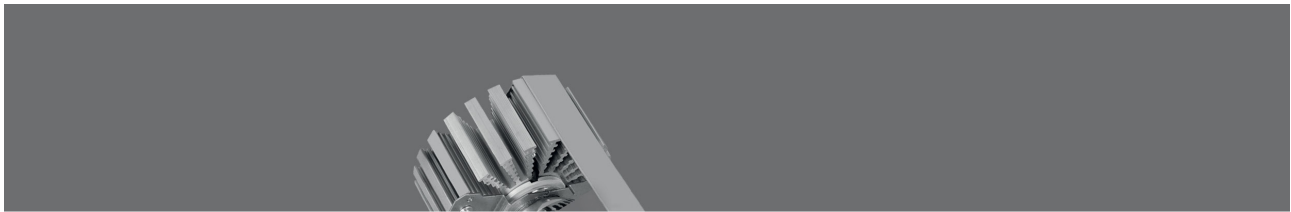

RAL COLORS

Std.

9016

Opt.

9005

9006



LUCIFER / ASYMMETRICAL

IP20  

Code	Luminous Flux	System Power	Weight
LCF/AS 15	1.280 lm	15 W	0.95 Kg
LCF/AS 27	2.270 lm	27 W	1.35 Kg
LCF/AS 36	3.035 lm	36 W	1.75 Kg

Frame: Aluminum Injection

Diffuser: Prismatic Lens

Reflector: Aluminum

Cooler: Aluminum Extrusion

Beam Angle: Asymmetrical

Voltage: 220~240 VAC

Color Temperature: 2700-3000-4000-5000-6500K

Driver: Included

Led: COB



Code	Cut-Out
LCF/AS	Ø206 mm



BOX DIMENSIONS

LCF15 25x25x32 cm

LCF27 25x25x32 cm

LCF36 25x25x32 cm




BOX WEIGHT

LCF15 1.2 kg

LCF27 1.6 kg

LCF36 2 kg



cd/klm
 - C0 - C180 - C90 - C270

