




SAKURA

Track Spot Combinations


Sakura is a track-mounted spotlight designed for stores, showcases, and other retail applications. It can be used effectively in many areas with its design that can be easily rotated in any direction. Its aluminum body provides perfect heat transfer and performs the cooling task required for leds in the best way. In this way, high efficiency leds have a very long life.



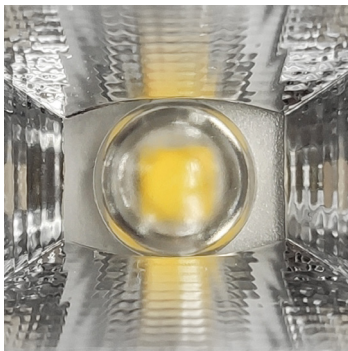


OPTICAL DIVERSITY

In addition to the high quality optical systems used in the luminaires, the LEDs used provide high savings thanks to their high efficiency. Thanks to the aluminum body, it provides good thermal conduction, allowing the LEDs to always operate at low temperatures.

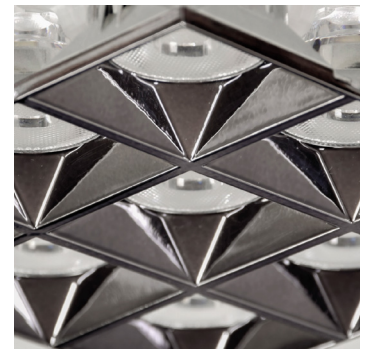

PRECISION LIGHTING OPTICS

The optical elements used in the fixtures provide different light distributions to meet the technical conditions of the places to be illuminated. The optical elements used contain highly efficient reflective surfaces. Glare is minimal.

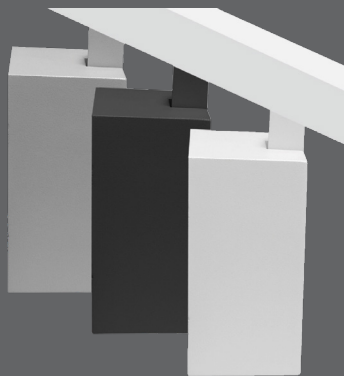

3 DIFFERENT COLORS

The luminaires are designed in 3 different colors as white, black and gray. This variety of colors provided by the fixtures allows color selection according to the decoration of the spaces. In this way, the adaptation of the fixtures to their usage areas and their aesthetic contribution can be increased. The luminaires can fully meet the lighting needs of the environments thanks to two different sizes and wattage options.

RAL COLORS

Std.



Opt.



9005
9006



SAKURA MINI

IP20

Code	Beam Angle	Luminous Flux	System Power	Weight
SKR Mini NB	28°	960 lm	11 W	0.8 Kg
SKR Mini WB	52°	955 lm	11 W	0.8 Kg

Body: Aluminum Injection
Lens: PMMA

Driver: Included
Voltage: 220~240VAC

Color Temperature: 3000-4000-5000-6500K
Led: High Power Led

Optional




BOX DIMENSIONS
15x12x7 cm




BOX WEIGHT
1.1 Kg

NARROW



cd/klm — C0 - C180 — C90 - C270

WIDE



cd/klm — C0 - C180 — C90 - C270



RAL COLORS

Std.

9016

Opt.

9005

9006

SAKURA OKI

IP20  

Code	Beam Angle	Luminous Flux	System Power	Weight
SKR OKI NB	12°	2.290 lm	27 W	0.9 Kg
SKR OKI MB	38°	2.590 lm	27 W	0.9 Kg
SKR OKI WB	50°	2.610 lm	27 W	0.9 Kg
SKR OKI VWB	67°	2.720 lm	27 W	0.9 Kg

Body: Aluminum Injection

Driver: Included


Color Temperature: 3000-4000-5000-6500K

Lens: PMMA


Voltage: 220~240VAC

Led: High Power Led

Optional

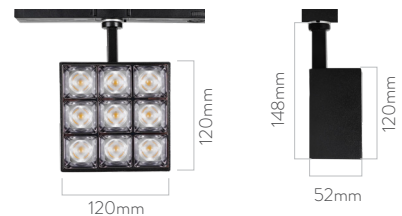


NARROW




cd/klm
— C0 - C180 — C90 - C270

MEDIUM




cd/klm
— C0 - C180 — C90 - C270

WIDE



cd/klm
— C0 - C180 — C90 - C270

VERY WIDE



cd/klm
— C0 - C180 — C90 - C270



BOX DIMENSIONS
20x12x7 cm



BOX WEIGHT
1.2 Kg

RAL COLORS
 Std.
 9016
 Opt.
 9005
 9006



SAKURA LINE

IP20  

Code	Beam Angle	Luminous Flux	System Power	Weight
SKR LINE	28°	730 lm	7 W	0.65 Kg

Body: Aluminum Injection
Lens: PMMA

Driver: Included
Voltage: 220~240VAC


Color Temperature: 3000-4000-5000-6500K
Led: Mid Power



BOX DIMENSIONS
 24x14x5 cm



BOX WEIGHT
 1 Kg



cd/klm
 — C0 - C180 — C90 - C270

