

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		8022.2 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax At 50% of Imax At 90% of Imax	25.3V x 25.4H 14.4V x 14.6H 6.4V x 6.6H
Beam Flux	Total To 10% of Imax To 50% of Imax To 90% of Imax	1001.1 lumens per klm. 503.0 lumens per klm. 297.3 lumens per klm. 77.2 lumens per klm.
	Upward LOR Downward LOR	0.0 % 100.1 %
Luminaire Efficiency (Light Output Ratio)		100.0 %

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: LITPA
Test Date: 16/12/2021

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.400
Humidity: 65.0%
Test Distance: 7.200m [K=1.0000]
Remarks: KYH-XL 400W 6500K

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.19V I:1.7878A P:406.02W PF:0.9866 Freq:50.00Hz Lamp Flux:51584.2x1 lm		
NAME: KYH-XL	TYPE:OUTDOOR	WEIGHT:28 kg
SPEC.:400 WATT	DIM.: 540X660X70	SERIAL No.:
MFR.: LITPA AYDINLATMA	SUR.:	Shielding Angle:

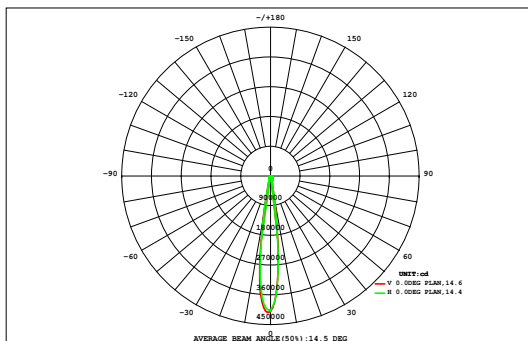

DATA OF LAMP		Eff:127.05lm/W	
MODEL	KYH-XL	Imax (cd)	413819
NOMINAL POWER (W)	400	AVAILABILITY (%)	50.1
RATED VOLTAGE (V)	230.0	Avai. FLUX (lm)	25829
NOMINAL FLUX (lm)	51584.2	LOR (%)	100.0
LAMPS INSIDE	1	TOTAL FLUX (lm)	51584
TEST VOLTAGE (V)	230	θ @50% (H, V)	15,14DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.01	0.06	0.19	0.45	0.89	1.55	2.34	3.12	3.68	3.85	3.50	2.89	2.20	1.42	0.78	0.36	0.14	0.03	27.5	0.00
80	0.02	0.25	1.24	3.64	7.60	12.8	18.6	23.6	26.9	27.7	25.1	20.7	15.3	9.71	5.02	1.99	0.50	0.06	201	0.00
70	0.04	0.75	3.99	11.2	22.6	36.8	51.5	63.9	71.7	73.2	66.6	55.6	40.9	25.6	13.6	5.44	1.27	0.10	545	0.00
60	0.07	1.58	8.11	21.6	43.0	68.9	94.9	116	129	131	119	99.8	73.9	47.9	25.1	10.2	2.39	0.17	993	0.00
50	0.12	2.59	12.7	33.2	65.3	104	141	171	188	191	175	147	110	71.8	39.1	15.5	3.73	0.25	1472	0.00
40	0.17	3.60	17.1	44.8	86.4	136	183	221	244	248	227	193	145	95.0	52.0	21.2	5.09	0.34	1923	0.00
30	0.22	4.53	20.7	54.7	105	162	219	273	324	331	282	231	175	115	63.1	26.0	6.21	0.42	2392	0.00
	0.25	5.22	23.5	61.6	117	180	249	389	895	1016	441	265	195	129	70.8	29.1	7.03	0.48	4074	859
	0.27	5.57	25.1	65.1	123	188	272	674	5728	7027	1006	301	202	134	73.4	30.2	7.44	0.52	15863	13359
	0.27	5.52	24.7	63.9	121	191	275	640	4961	5965	930	297	196	131	72.0	29.7	7.40	0.52	13911	11368
	0.25	5.06	22.7	58.3	111	179	250	368	656	715	403	255	183	122	67.0	27.6	6.91	0.49	3431	243
-30	0.21	4.32	19.4	50.1	96.4	154	215	264	302	305	269	218	161	106	58.0	24.0	6.06	0.43	2252	0.00
-40	0.16	3.36	15.1	40.0	77.4	122	170	208	230	230	211	176	131	86.1	46.8	19.4	4.93	0.35	1771	0.00
-50	0.11	2.31	10.8	28.7	56.0	89.1	123	151	166	167	155	129	97.2	63.6	34.7	14.4	3.65	0.27	1291	0.00
-60	0.07	1.35	6.61	17.8	35.0	56.8	78.6	97.5	106	109	101	84.6	63.5	41.4	22.7	9.44	2.37	0.18	834	0.00
-70	0.04	0.60	3.15	8.87	17.7	29.2	41.4	51.1	56.0	57.4	53.5	45.0	33.9	22.0	12.1	4.97	1.27	0.11	438	0.00
-80	0.02	0.19	0.90	2.70	5.67	9.60	13.7	17.1	18.9	19.7	18.5	15.7	11.8	7.67	4.23	1.79	0.50	0.06	149	0.00
-90	0.01	0.04	0.13	0.29	0.56	0.92	1.36	1.71	1.90	2.06	2.03	1.80	1.43	1.00	0.62	0.33	0.15	0.04	16.4	0.00
	-90	-80	-70	-60	-50	-40	-30	-20	HORIZONTAL (DEG)	20	30	40	50	60	70	80	90			
Φ t	2.31	46.9	216	567	1091	1723	2399	3732	14107	16619	4488	2538	1839	1210	661	272	67.0	4.84	51584	---
Φ a	0.00	0.00	0.00	0.00	0.00	0.00	0.00	239	11037	13644	910	0.00	0.00	0.00	0.00	0.00	0.00	0.00	---	25829

one-half-peak spread: U:6.4,D:8.1 , L:7.4,R:7.3


NEMA Beam Type: Type 2

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature: 20DEG
 Operators: LITPA
 Test Date: 16/12/2021

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.400
 Humidity: 65.0%
 Test Distance: 7.200m [K=1.0000]
 Remarks: KYH-XL 400W 6500K

ISOCANDELA DIAGRAM

Test:U:230.19V I:1.7878A P:406.02W PF:0.9866 Freq:50.00Hz Lamp Flux:51584.2x1 lm		
NAME: KYH-XL	TYPE:OUTDOOR	WEIGHT:28 kg
SPEC.:400 WATT	DIM.: 540X660X70	SERIAL No.:
MFR.: LITPA AYDINLATMA	SUR.:	Shielding Angle:

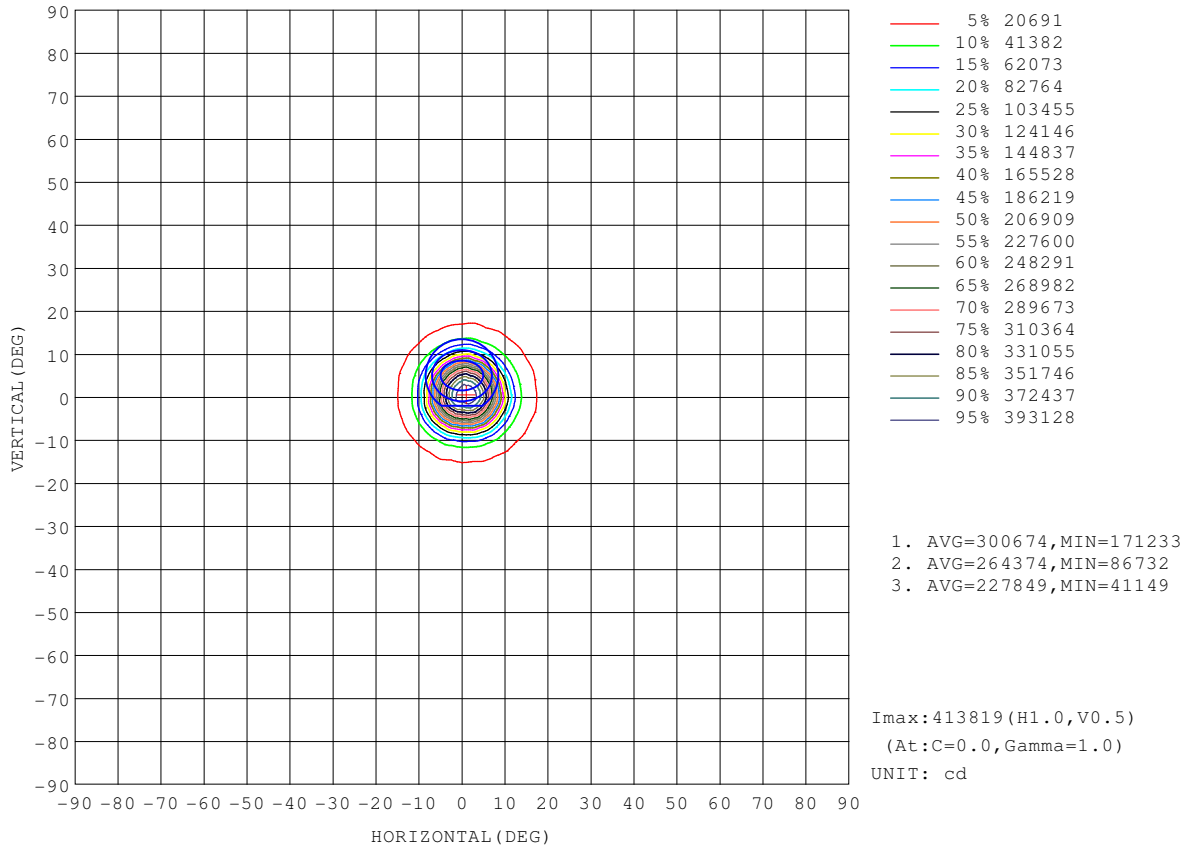


C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: LITPA
Test Date: 16/12/2021

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.400
Humidity: 65.0%
Test Distance: 7.200m [K=1.0000]
Remarks: KYH-XL 400W 6500K

ISOLUX DIAGRAM


Test:U:230.19V I:1.7878A P:406.02W PF:0.9866 Freq:50.00Hz Lamp Flux:51584.2x1 lm		
NAME: KYH-XL	TYPE:OUTDOOR	WEIGHT:28 kg
SPEC.:400 WATT	DIM.: 540X660X70	SERIAL No.:
MFR.: LITPA AYDINLATMA	SUR.:	Shielding Angle:

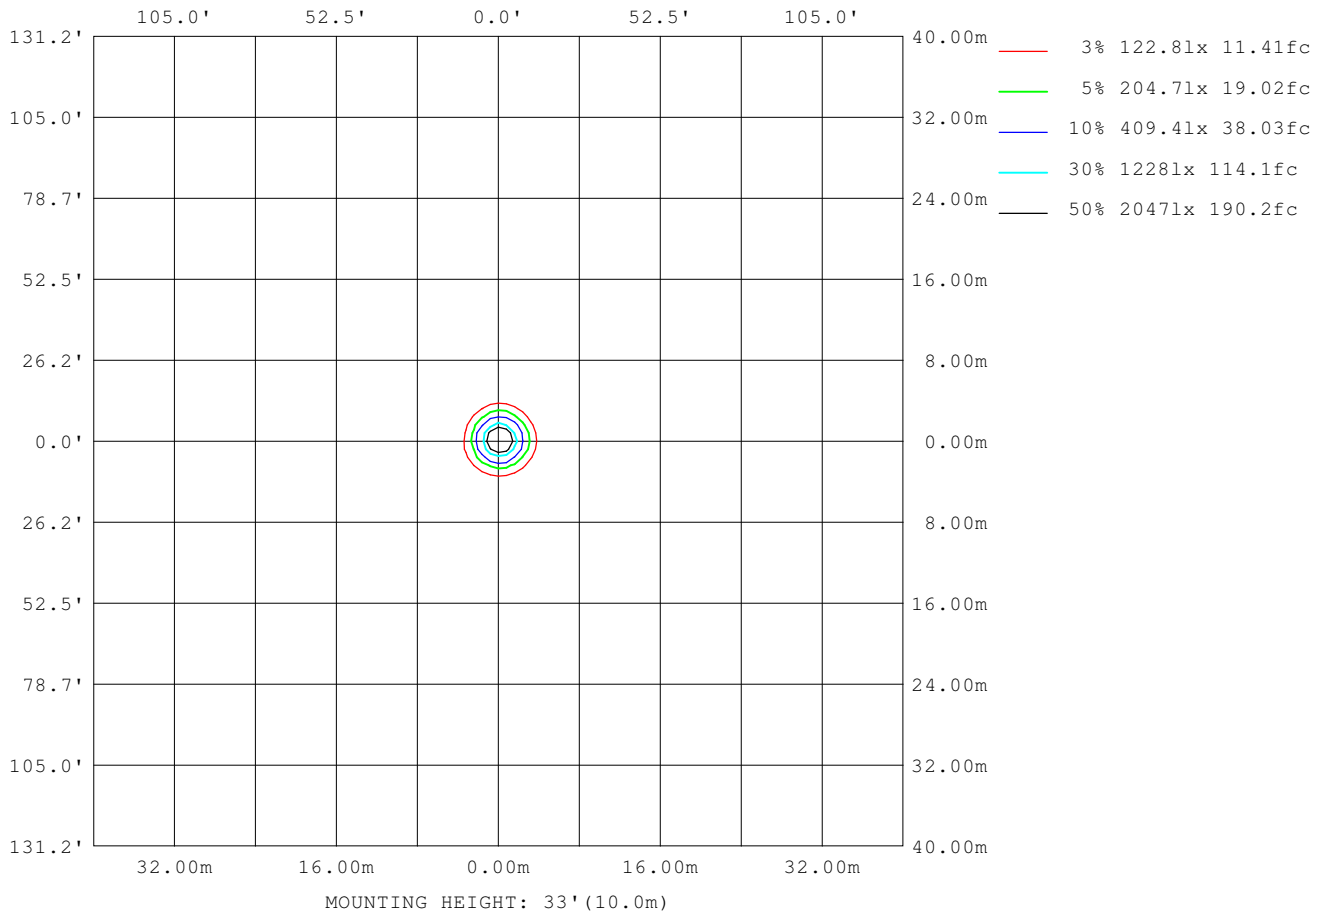

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: LITPA
Test Date: 16/12/2021

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.400
Humidity: 65.0%
Test Distance: 7.200m [K=1.0000]
Remarks: KYH-XL 400W 6500K

Planar Illuminance Curve

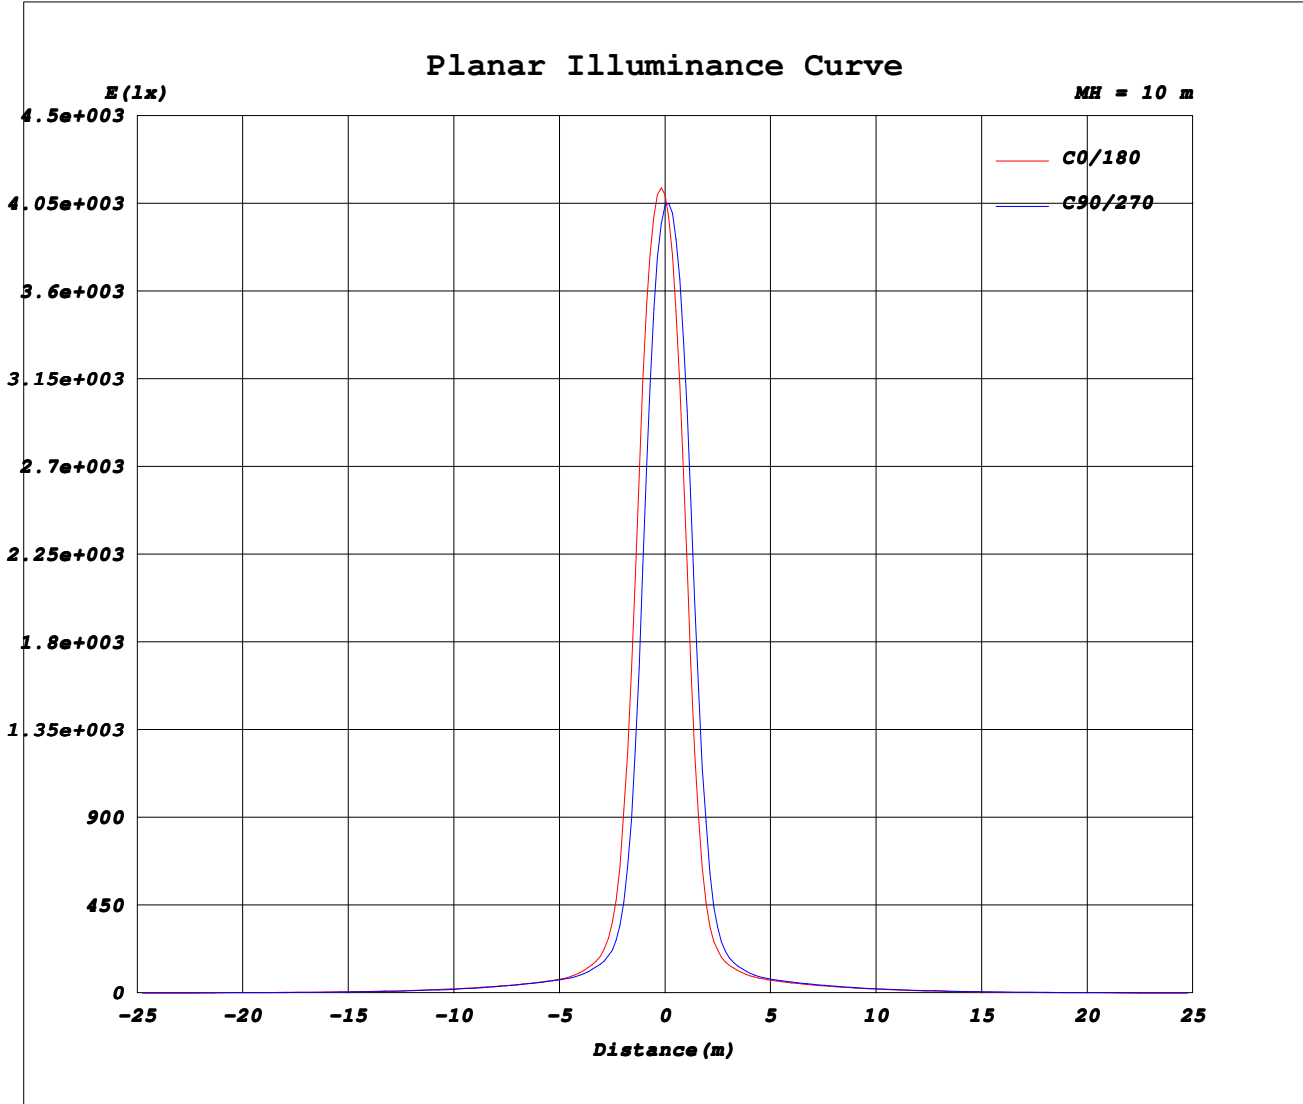


C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: LITPA
Test Date: 16/12/2021

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.400
Humidity: 65.0%
Test Distance: 7.200m [K=1.0000]
Remarks: KYH-XL 400W 6500K

AAI Figure

Test:U:230.19V I:1.7878A P:406.02W PF:0.9866 Freq:50.00Hz Lamp Flux:51584.2x1 lm		
NAME: KYH-XL	TYPE:OUTDOOR	WEIGHT:28 kg
SPEC.:400 WATT	DIM.: 540X660X70	SERIAL No.:
MFR.: LITPA AYDINLATMA	SUR.:	Shielding Angle:

Flux out:17466 lm

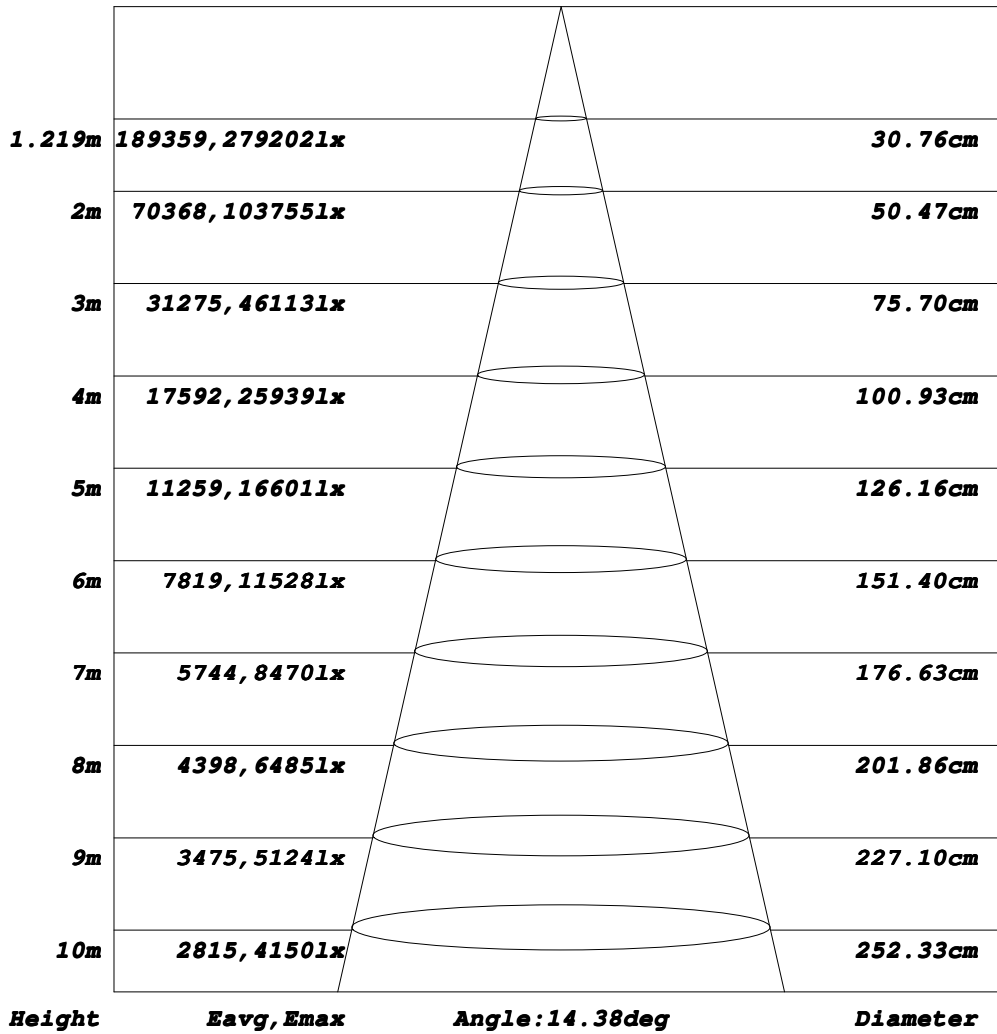

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:20DEG
Operators:LITPA
Test Date:16/12/2021

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.400
Humidity:65.0%
Test Distance:7.200m [K=1.0000]
Remarks: KYH-XL 400W 6500K

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:230.19V I:1.7878A P:406.02W PF:0.9866 Freq:50.00Hz Lamp Flux:51584.2x1 lm		
NAME: KYH-XL	TYPE:OUTDOOR	WEIGHT:28 kg
SPEC.:400 WATT	DIM.: 540X660X70	SERIAL No.:
MFR.: LITPA AYDINLATMA	SUR.:	Shielding Angle:

Table--1

UNIT: μ A100cd

H (DEG) V (DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.04	0.04	0.03	0.03	0.03	0.03	0.03	0.03	0.03	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04
-85	0.04	0.04	0.03	0.04	0.05	0.07	0.10	0.13	0.15	0.18	0.20	0.23	0.26	0.30	0.35	0.34	0.33	0.36	0.38
-80	0.04	0.04	0.06	0.11	0.17	0.24	0.34	0.48	0.65	0.84	1.06	1.27	1.45	1.71	1.99	2.07	2.09	2.23	2.34
-75	0.04	0.05	0.11	0.20	0.36	0.61	0.97	1.41	1.91	2.50	3.10	3.63	4.16	4.78	5.30	5.59	5.75	6.00	6.16
-70	0.04	0.07	0.18	0.37	0.73	1.30	2.10	2.98	3.88	4.87	6.21	7.24	8.13	9.06	10.2	10.8	10.9	11.4	11.8
-65	0.04	0.09	0.26	0.64	1.30	2.30	3.55	4.90	6.49	8.13	9.84	11.5	13.2	15.0	16.4	17.3	17.8	18.4	18.8
-60	0.04	0.11	0.37	1.00	2.07	3.54	5.26	7.41	9.48	11.6	14.1	17.0	19.2	21.3	23.4	24.8	25.2	26.1	26.9
-55	0.04	0.14	0.53	1.46	2.99	4.82	7.39	10.0	12.8	16.0	19.6	22.6	25.6	28.2	31.2	33.3	34.1	35.1	36.0
-50	0.04	0.17	0.71	2.03	3.96	6.48	9.47	12.9	16.9	21.0	24.9	28.9	32.8	36.3	39.6	42.3	43.5	44.6	45.5
-45	0.04	0.19	0.91	2.61	4.95	8.12	11.6	16.0	21.2	25.9	30.6	35.7	40.4	44.5	48.1	51.5	53.3	54.5	55.5
-40	0.04	0.22	1.13	3.19	6.18	9.71	13.8	19.6	25.2	30.8	36.7	42.5	47.9	52.8	57.1	61.2	63.8	65.3	66.2
-35	0.04	0.25	1.36	3.76	7.27	11.3	16.6	22.6	29.0	35.9	42.6	49.0	55.4	61.7	66.7	70.9	74.1	76.0	76.8
-30	0.04	0.28	1.59	4.31	8.25	12.8	19.1	25.5	32.8	40.5	48.0	55.5	63.3	70.4	76.0	80.5	84.2	86.3	87.2
-25	0.04	0.31	1.79	4.85	9.17	14.5	21.1	28.3	36.3	44.7	53.0	62.0	70.5	78.1	84.6	89.4	94.0	97.5	99.4
-20	0.04	0.34	2.00	5.31	10.0	16.0	22.9	30.8	39.6	48.3	57.6	67.6	76.8	84.8	91.9	100	111	125	132
-15	0.04	0.35	2.16	5.73	10.7	17.2	24.6	32.9	42.1	51.3	61.7	72.0	81.6	90.4	100	120	155	191	213
-10	0.04	0.37	2.28	6.02	11.3	18.0	26.0	34.9	44.3	53.9	64.8	75.3	85.1	94.7	111	156	231	462	681
-5	0.04	0.38	2.36	6.20	11.8	18.6	27.0	36.3	46.0	56.0	66.5	76.7	87.0	98.7	125	185	469	1701	2721
0	0.04	0.38	2.39	6.26	12.0	18.8	27.6	37.1	47.1	57.2	66.9	75.8	85.1	97.7	127	203	672	2717	4094
5	0.04	0.38	2.37	6.23	11.9	18.7	27.5	36.9	46.9	57.1	66.7	75.4	84.6	96.6	123	195	548	2058	3399
10	0.04	0.37	2.31	6.10	11.7	18.3	26.9	36.2	46.0	56.0	65.6	74.2	83.2	94.1	112	159	281	699	1207
15	0.04	0.36	2.21	5.86	11.2	17.6	25.9	34.9	44.5	54.4	63.8	72.2	80.6	89.6	102	126	168	231	291
20	0.04	0.34	2.07	5.53	10.6	16.7	24.5	33.2	42.3	51.8	60.9	69.1	76.7	85.0	93.5	104	120	140	151
25	0.04	0.32	1.88	5.12	9.82	15.6	22.6	31.0	39.7	48.5	57.1	65.2	72.6	79.5	86.1	92.1	98.4	104	106
30	0.04	0.29	1.69	4.63	8.92	14.3	20.6	28.5	36.3	44.5	52.6	60.4	67.4	73.6	78.8	83.5	87.4	90.0	91.6
35	0.04	0.26	1.47	4.08	7.87	12.9	18.4	25.5	32.5	39.9	47.6	54.8	61.2	66.7	71.4	75.4	78.5	80.4	81.8
40	0.04	0.23	1.25	3.45	6.80	11.3	16.2	22.1	28.4	35.2	42.1	48.5	54.2	59.2	63.5	67.1	69.8	71.5	72.7
45	0.04	0.20	1.03	2.85	5.70	9.61	13.9	18.7	24.2	30.2	36.3	41.7	46.8	51.2	55.0	58.3	60.6	62.3	63.1
50	0.04	0.17	0.80	2.28	4.67	7.88	11.4	15.4	20.1	25.1	30.0	34.6	39.0	42.8	46.2	49.1	51.1	52.5	53.3
55	0.04	0.15	0.59	1.73	3.57	6.01	8.96	12.2	15.8	19.8	23.8	27.6	31.2	34.4	37.3	39.7	41.4	42.6	43.2
60	0.04	0.12	0.41	1.23	2.54	4.41	6.57	9.06	11.8	14.9	17.8	20.7	23.6	26.2	28.4	30.3	31.8	32.8	33.4
65	0.04	0.10	0.29	0.80	1.71	2.91	4.44	6.25	8.32	10.3	12.5	14.6	16.7	18.5	20.2	21.6	22.8	23.5	23.9
70	0.04	0.07	0.20	0.46	1.00	1.74	2.63	3.81	5.06	6.46	7.68	9.16	10.6	11.8	13.0	14.0	14.8	15.4	15.7
75	0.04	0.05	0.13	0.26	0.49	0.87	1.35	1.93	2.65	3.33	4.10	4.92	5.71	6.45	6.99	7.73	8.43	8.59	8.59
80	0.04	0.04	0.08	0.14	0.23	0.34	0.50	0.73	1.01	1.28	1.57	1.95	2.36	2.65	2.92	3.25	3.54	3.68	3.76
85	0.04	0.04	0.04	0.06	0.10	0.13	0.15	0.19	0.24	0.29	0.34	0.42	0.52	0.58	0.63	0.73	0.83	0.86	0.87
90	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.05	0.05	0.06	0.06	0.07	0.07

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature: 20DEG
 Operators: LITPA
 Test Date: 16/12/2021

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.400
 Humidity: 65.0%
 Test Distance: 7.200m [K=1.0000]
 Remarks: KYH-XL 400W 6500K

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:230.19V I:1.7878A P:406.02W PF:0.9866 Freq:50.00Hz Lamp Flux:51584.2x1 lm		
NAME: KYH-XL	TYPE:OUTDOOR	WEIGHT:28 kg
SPEC.:400 WATT	DIM.: 540X660X70	SERIAL No.:
MFR.: LITPA AYDINLATMA	SUR.:	Shielding Angle:

Table--2

UNIT: μ A100cd

H (DEG) V (DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.05	0.05	0.05	0.06	0.07	0.08	0.09	0.10	0.11
-85	0.40	0.42	0.43	0.44	0.43	0.41	0.39	0.37	0.34	0.30	0.27	0.25	0.22	0.19	0.18	0.15	0.13	0.11
-80	2.35	2.31	2.32	2.28	2.14	1.97	1.81	1.60	1.36	1.17	0.97	0.77	0.59	0.43	0.32	0.23	0.16	0.11
-75	6.17	6.08	6.00	5.77	5.43	5.00	4.58	4.05	3.41	2.82	2.30	1.81	1.29	0.87	0.57	0.35	0.19	0.11
-70	11.9	11.7	11.5	10.9	10.2	9.46	8.48	7.41	6.28	5.22	4.28	3.24	2.36	1.56	0.95	0.51	0.23	0.11
-65	18.8	18.5	18.1	17.3	16.2	14.9	13.5	11.9	10.1	8.40	6.78	5.23	3.68	2.46	1.45	0.72	0.28	0.11
-60	26.9	26.5	25.8	24.6	23.0	21.2	19.2	16.8	14.4	12.0	9.67	7.45	5.30	3.51	2.06	0.98	0.34	0.11
-55	36.0	35.4	34.3	32.7	30.6	28.1	25.4	22.3	19.0	16.0	12.8	9.86	7.18	4.65	2.76	1.27	0.41	0.11
-50	45.4	44.7	43.3	41.3	38.7	35.7	32.1	28.2	24.1	20.2	16.3	12.4	9.01	5.91	3.51	1.60	0.48	0.11
-45	55.3	54.4	52.7	50.1	47.0	43.2	39.0	34.2	29.4	24.5	19.7	15.0	10.9	7.30	4.25	1.93	0.56	0.11
-40	65.6	64.6	62.5	59.1	55.3	50.7	45.7	40.4	34.8	28.8	23.1	17.7	12.8	8.59	4.97	2.27	0.63	0.11
-35	75.7	74.8	72.1	68.2	63.9	58.3	52.3	46.4	40.0	33.1	26.5	20.4	14.6	9.85	5.66	2.60	0.70	0.11
-30	86.1	85.3	81.5	77.2	71.9	65.3	58.9	52.0	44.8	37.2	29.7	23.0	16.3	11.0	6.32	2.93	0.79	0.11
-25	98.3	95.6	90.7	86.0	79.0	71.8	64.6	57.2	49.2	41.0	32.9	25.3	18.0	12.1	7.00	3.23	0.86	0.11
-20	128	116	104	93.8	85.7	77.7	69.5	61.5	53.0	44.3	35.7	27.4	19.5	13.0	7.59	3.48	0.92	0.11
-15	202	167	132	105	91.7	82.5	73.4	65.1	56.5	47.3	38.1	29.2	20.9	13.7	8.06	3.67	0.97	0.11
-10	571	296	177	124	97.6	85.8	76.6	68.1	59.3	49.5	39.8	30.4	21.9	14.3	8.42	3.82	1.01	0.11
-5	2211	766	245	146	104	88.4	78.7	69.8	60.9	50.9	40.9	31.3	22.6	14.7	8.64	3.91	1.03	0.11
0	3564	1291	312	156	106	89.3	79.3	70.6	61.6	51.5	41.4	31.7	23.0	14.9	8.75	3.94	1.04	0.11
5	2714	902	274	147	105	90.7	81.2	72.0	62.2	51.9	41.7	31.8	23.0	14.9	8.69	3.90	1.03	0.11
10	914	386	193	128	101	89.2	80.9	72.0	62.0	51.6	41.3	31.5	22.6	14.7	8.51	3.79	1.00	0.11
15	253	190	141	109	94.8	86.3	78.5	69.8	60.0	50.1	40.3	30.7	22.0	14.1	8.20	3.64	0.96	0.11
20	146	128	109	97.6	89.2	82.3	74.9	66.6	57.2	47.7	38.3	29.2	21.1	13.4	7.77	3.43	0.91	0.11
25	106	101	95.1	89.1	83.8	77.6	70.3	62.2	53.4	44.8	35.8	27.4	19.8	12.5	7.23	3.17	0.84	0.11
30	91.7	88.4	86.0	82.1	77.3	71.8	64.8	56.8	48.9	41.0	32.9	25.2	18.1	11.4	6.58	2.87	0.77	0.11
35	82.3	79.8	77.4	74.4	70.0	64.8	58.4	51.4	43.9	36.7	29.5	22.6	15.9	10.3	5.85	2.54	0.68	0.11
40	73.1	71.3	68.6	66.1	62.0	56.9	51.6	45.4	38.7	32.2	26.0	19.9	13.6	9.06	5.03	2.19	0.60	0.11
45	63.4	62.0	59.3	57.0	53.6	49.1	44.3	38.9	33.2	27.7	22.2	16.6	11.7	7.72	4.21	1.84	0.53	0.11
50	53.4	52.3	50.1	47.9	45.0	41.2	36.8	32.3	27.7	23.0	18.3	13.4	9.70	6.31	3.45	1.50	0.45	0.11
55	43.2	42.4	40.7	38.7	36.3	33.0	29.5	26.0	22.1	18.3	14.0	10.7	7.72	4.91	2.73	1.18	0.38	0.11
60	33.3	32.7	31.2	29.6	27.8	25.4	22.7	19.9	16.7	13.4	10.7	8.17	5.71	3.72	2.04	0.89	0.32	0.11
65	24.0	23.7	22.5	21.2	20.0	18.5	16.4	13.7	11.7	9.68	7.65	5.68	4.06	2.62	1.42	0.64	0.26	0.11
70	15.9	15.8	14.9	13.9	13.1	11.8	10.4	9.14	7.74	6.30	4.88	3.65	2.60	1.68	0.92	0.44	0.22	0.11
75	8.72	8.69	8.13	7.52	7.20	6.73	6.00	5.12	4.31	3.56	2.75	2.00	1.43	0.95	0.55	0.30	0.18	0.11
80	3.79	3.76	3.55	3.27	3.10	2.92	2.59	2.22	1.87	1.53	1.18	0.87	0.65	0.46	0.30	0.19	0.15	0.11
85	0.90	0.91	0.86	0.80	0.77	0.73	0.64	0.55	0.49	0.42	0.34	0.28	0.23	0.20	0.16	0.13	0.12	0.11
90	0.07	0.08	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.09	0.11

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 20DEG
Operators: LITPA
Test Date: 16/12/2021

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.400
Humidity: 65.0%
Test Distance: 7.200m [K=1.0000]
Remarks: KYH-XL 400W 6500K