

Downlight

PUNTO

IP20
IP40 Optional

High permeability opal diffuser transfers light to the environment in soft a way. High lighting efficiency and a clear appearance is achieved thanks to special reflectors used in the inner side surface of the fixture. Affordability, efficiency and slimness are three words that summarize Punto Series downlights best.



SSL 104




SSL 160


SSL 200



SSL 235

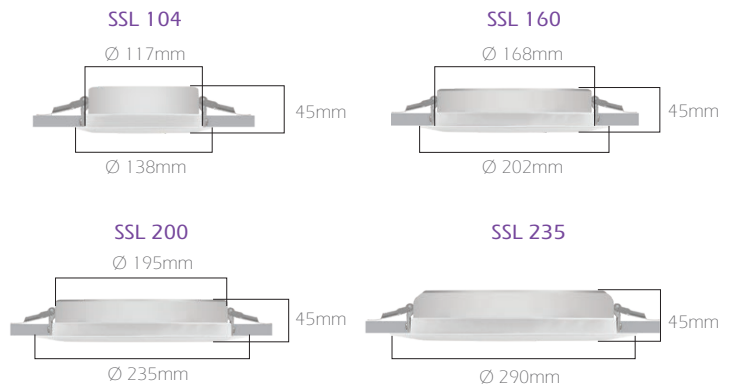

| Code | Cut-Out |
|---------|---------|
| SSL 104 | 120 mm |
| SSL 160 | 172 mm |
| SSL 200 | 205 mm |
| SSL 235 | 245 mm |



| Code | SSL 104 | SSL 160 | SSL 200 | SSL 235 |
|--------------------|-------------------------------|-----------|-----------|-----------|
| LED | High Efficiency Mid-Power LED | | | |
| LED Power | 13 W | 18 W | 23 W | 32 W |
| Light Flux | 776 lm | 1,500 lm | 1,880 lm | 2,300 lm |
| Colour Temperature | 3000 - 4000 - 5000 K | | | |
| Voltage | 220V - 50Hz | | | |
| Body | Aluminum injection frame. | | | |
| Diffuser | Opal | | | |
| Cooler | Cooling from the body surface | | | |
| Colour | White | | | |
| Box Dimensions | 15x15x7cm | 22x22x7cm | 25x25x7cm | 30x30x7cm |
| Weight | 250 gr | 450 gr | 450 gr | 550 gr |