



## Hygienic Room Luminaires


### HFC

IP54



Fixtures with high protection class are produced with specifications to be used in areas where cleaning is important.

Light coming from multi LED source in fixtures passes through a sandblasted specially produced glass, and provides an extremely soft and homogeneous distribution to the environment. Fixture efficiency is brought to the forefront in the clear glass option. It is possible to produce according to all types of suspended ceilings.

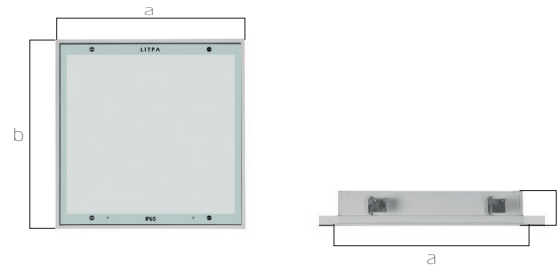

	Code	a	b	Cut-Out
<b>MODULAR</b>	HFC 300	595mm	595mm	580x580mm
<b>CLIP-IN</b>	HFC 002	599mm	599mm	-

Code	HFC
LED	High efficiency Mid-Power LED
System Power	40 W
Light Flux	3,750 lm
Colour Temperature	3000-4000-5000 K
Cooler	Cooling from the body surface
Voltage	220V - 50Hz
Body	0,6mm thick A1 quality DKP steel sheet. 80 micron electrostatic powder painted.
Glass	4mm thick tempered glass 1,2mm opal
Colour	White
Box Dimensions	62x62x13cm
Weight	9.000 gr