



CAIRO IP66

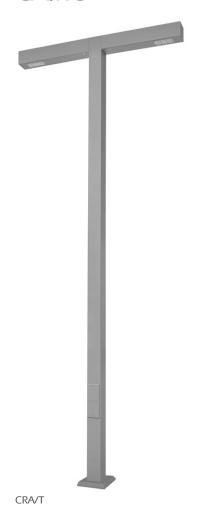

Cairo; With its simple and elegant profile structure in lighting, it reflects a contemporary and innovative understanding style. Thanks to its pole structure and design, it has an aesthetic appearance in many areas. The luminaires are offered with different wattage options. Poles from 3.5 meters to 8 meters can be used. The models produced in double arm structure can meet the light requirements in both different directions.

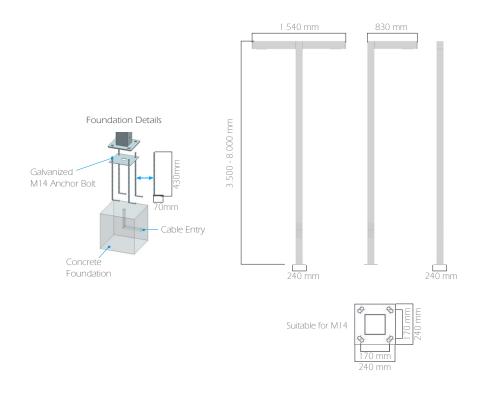

System Power  4x50W 2x50W  Light Flux 20.000lm 10.000lm  Colour Temperature 4000 - 5000 - 6500 K  Voltage 220V - 50Hz  Body Aluminum extrusion body, DKP sheet base thick 10mm  Cooler Cooling from the surface of the body  Colour	Code	CRAV12	CRAVII
Light Flux  20.000lm  10.000lm  Colour Temperature  4000 - 5000 - 6500 K  Voltage  220V - 50Hz  Body  Aluminum extrusion body, DKP sheet base thick 10mm  Cooler  Cooling from the surface of the body	LED	High Efficiency Power LEDs	
Colour Temperature 4000 - 5000 - 6500 K  Voltage 220V - 50Hz  Body Aluminum extrusion body, DKP sheet base thick 10mm  Cooler Cooling from the surface of the body	System Power	<b>4</b> x50W	2x50W
Voltage 220V - 50Hz  Body Aluminum extrusion body, DKP sheet base thick 10mm  Cooler Cooling from the surface of the body	Light Flux	20.000lm	10.000lm
Body Aluminum extrusion body, DKP sheet base thick 10mm  Cooler Cooling from the surface of the body	Colour Temperature	4000 - 5000 - 6500 K	
Cooler Cooling from the surface of the body	Voltage	220V - 50Hz	
cooming from the surface of the body	Body	Aluminum extrusion body, DKP sheet base thick 10mm	
Colour Grey	Cooler	Cooling from the surface of the body	
	Colour	Grey	

