



Downlight

## SFR

## IP20

SFR model downlight fixtures are indispensable application elements for interior lighting with their compact and simple structure. They can be applied in hotels, schools, shopping centers and many other places. Reflectors used in the fixture to perform this task without requiring extra frame and provide an appearance integrated with the ceiling and which does not harm the aesthetics structure of the area thanks to the fine structure thereof. They offer a perfect solution in locations where dark light is desired and glare is unwanted by using black reflector.



SFR 13/S White




Chrome

Gold



SFR 13/S

SFR 13/L



SFR 5 Black

SFR 5 White



SFR 8


SFR5 - SFR8



Ø 85mm

Ø 85mm

SFR 13/S

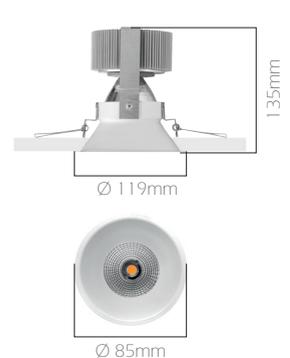

Ø 119mm

Ø 85mm


SFR 13/L




Ø 111mm

Code	Cut-Out
SFR 5	80 mm
SFR 8	80 mm
SFR 13/S	110 mm
SFR 13/L	105 mm


SFR 13/S White




SFR 13/S Black



SFR 5 White



SFR 5 Black



Code	SFR 5	SFR 8	SFR 13/S	SFR 13/L
LED	High Efficiency COB LED			
LED Power	5 W	8 W	13 W	13 W
Light Flux	350lm-Black Ref. 380lm-White Ref.	660lm-White Ref. -	708lm Black Ref. 833lm-White Ref.	833lm-White Ref. -
Colour Temperature	3000 - 4000 - 5000 K			
Voltage	220V - 50Hz			
Body	Manufactured from spinning aluminum and painted with 80 mm electrostatic powder paint			
Reflector	Spining aluminum			
Cooler	Aluminum extrusion			
Colour (Reflector)	White or Black			
Box Dimensions	10,5x10,5x10,5cm	10,5x10,5x15cm	14x13x13cm	16x13x13cm
Weight	250 gr	350 gr	450 gr	450 gr