

Downlight

PUNTO

IP20
IP40 Optional

High permeability opal diffuser transfers light to the environment in soft a way. High lighting efficiency and a clear appearance is achieved thanks to special reflectors used in the inner side surface of the fixture. Affordability, efficiency and slimness are three words that summarize Punto Series downlights best.



SSL 104




SSL 160

SSL 200



SSL 235

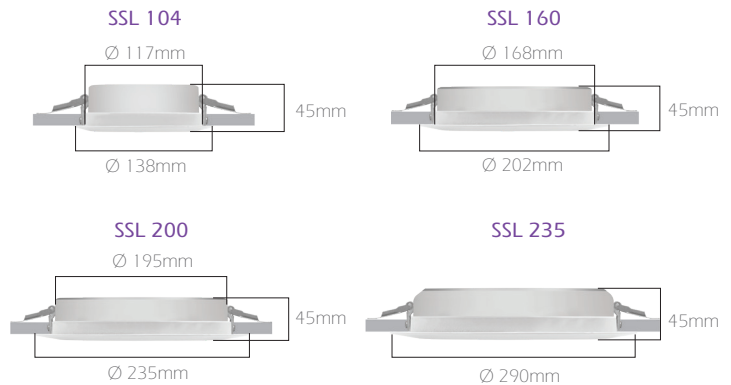

Code	Cut-Out
SSL 104	120 mm
SSL 160	172 mm
SSL 200	205 mm
SSL 235	245 mm

Code	SSL 104	SSL 160	SSL 200	SSL 235
LED	High Efficiency Mid-Power LED			
LED Power	13 W	18 W	23 W	32 W
Light Flux	1100 lm	1,500 lm	1,880 lm	2,300 lm
Colour Temperature	3000 - 4000 - 5000 K			
Voltage	220V - 50Hz			
Body	Aluminum injection frame.			
Diffuser	Opal			
Cooler	Cooling from the body surface			
Colour	White			
Box Dimensions	15x15x7cm	22x22x7cm	25x25x7cm	30x30x7cm
Weight	250 gr	450 gr	450 gr	550 gr

