

Office Lighting

LSL-P / LSL-OP

IP20


LSL Series fixtures are surface-mounted fixture with a wide high range of applications. The fixture is produced in different optical structures as double parabolic and opal. The high permeable lens material prevents the decrease of fixture efficiency while eliminating the problem of glare. It enables economic use by mounting to ceiling easily and thanks to the low energy consumption thereof.



LSL-P



LSL-OP

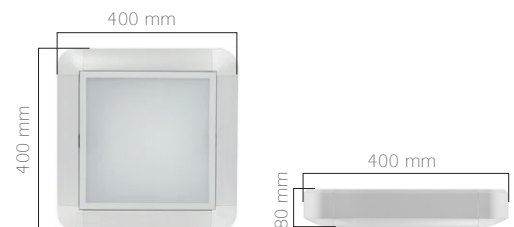

Code	LSL-P	LSL-OP
LED	High Efficiency Mid-Power LED	High Efficiency Mid-Power LED
System Power	18 W	14,5 W
Light Flux	2000 lm	1500 lm
Colour Temperature	3000 - 4000 - 5000 K	
Voltage	220V - 50Hz	
Body	0,6 mm thick DKP sheet steel	
Reflector	Alanod Miro Silver (only LSL/P)	
Diffuser	3mm Micro-Prismatic 92% transparent	1,2 mm opal
Cooler	Cooling from the body surface	
Colour	White	
Box Dimensions	42x42x9cm	
Weight	2.800 gr	2.500 gr